Local catalogue draft · Preview only. Product data and documents are not released. Open catalogue review

Draft with publication block

This view is not engineering approval. Open and withheld information remains unresolved.

▶ 8 open or withheld review cases



Product view 1 / 1

JOINT PARTS

Wall-Socket Mounting Bracket

Article number
X-S-WBF01

REQUEST A QUOTE

The fixed wall mounting connects a support-arm profile in the X-S system to a vertical or horizontal mounting surface. It forms a rigid attachment point and has no rotary function. The component sits between the mounting structure and profile. It is suited to assemblies where this connection is to remain fixed and the operator enclosure is positioned using other joints in the support arm.

Weight
1,000 g

Material
Aluminum

Colour
RAL 7035 / Cover RAL 7016

Package Dimensions
140 × 30 × 65 mm

HS Code
7606.99.90.19

Warranty
5 years

Technical data

Specifications for planning, selection and use at a glance.

Material & finish

Material Composition	Aluminum
Colour	RAL 7035 / Cover RAL 7016
RAL colours	RAL 7035 / RAL 7016

Application & function

Operating Weight	1,000 g
Primary Use Case	Machine Building / Automation / HMI operator stations
Operating Temperature	–40°C to +70°C
Protection Rating	–IP65 (DIN EN 60529)
Rated Voltage	Mechanical (not subject to electrical certification)
Movement	Fixed

Safety & compliance

Earthing	Yes, integrated solution
RoHS Compliance	RoHS EU Directive 2011/65/EU
REACH Compliance	REACH Regulation 1907/2006/EC
Certification	IEC 60529; (EG) No. 765/2008; (EU) 2023/956

Further information

Movement type	fest

Ordering & delivery information

Package dimensions

140 × 30 × 65 mm

Pack quantity

1

HS Code

7606.99.90.19

Warranty

5 years

Version & enquiry

Use the item number and version to prepare your enquiry.

SKU ↑	WEIGHT (G) ↑↓	Choose a version
SKU: X-S-WBF01	1000	Select


Assembly instructions

▶ About these instructions

Assembly sequence prepared from the exact XINDUX article data sheet. Tightening torques not specified in the source document are deliberately not added.

▼ Preparation & tools


Supplied and installation parts



Required tools

Allen key suitable for the fasteners

Torque wrench for the final engineering check

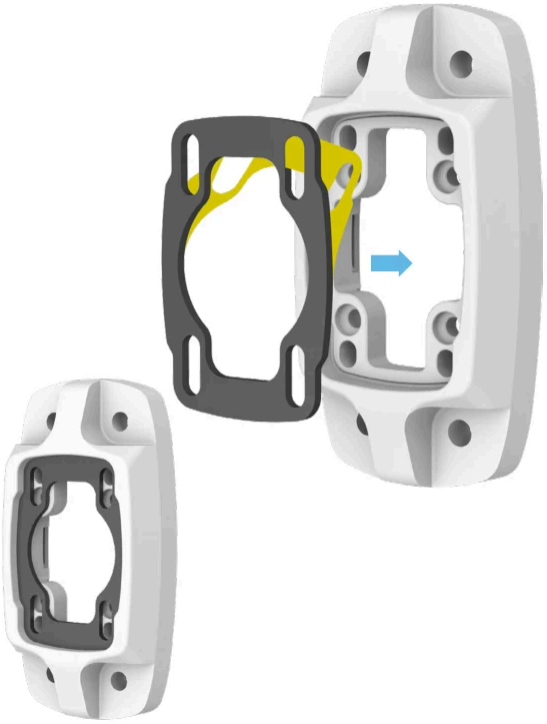

1. Insert the gasket


Remove the yellow tape. Insert the profile-side connection seal with the adhesive surface to the component into the seal holder shown without folds.





2. Connect the profile

Insert the profile into the coupling as shown in the figure on the left.

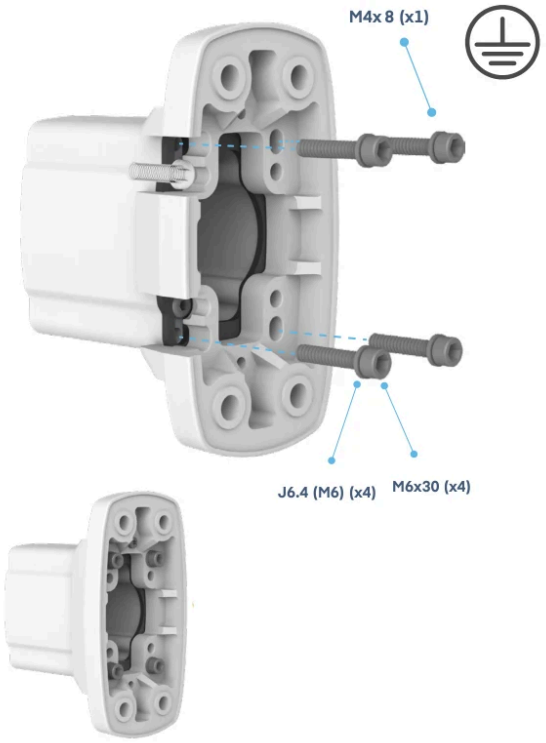

3. Connect the grounding

Tighten the profile bolts. Then establish the ground connection and check that it is secure.



4. Insert the gasket

Remove the yellow tape. Insert the seal to the mounting surface with the adhesive surface to the component into the seal holder shown without folds.



5. Fit the cover


> **The M8 mounting screws are not included. Don't forget to install the module's plastic covers.**

Place the black screw caps on the heads of the M8 screws. The M8 mounting screws are not included. Don't forget to install the module's plastic covers.

- M8

ARMINDUX | X-S-WBF01

Connection dimensions · mounting surface

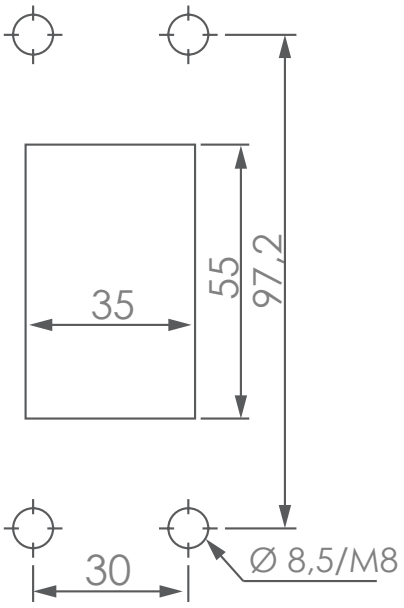

Mounting hole centres: 30 × 97.2 mm

Mounting template: Ø 8.5 / M8 · Opening dimension from drawing: 35 × 55 mm

This does not confirm free passage of a rigid connector through the complete coupling.

Source: catalogue PDF page 24. Original mounting diagram; no assumed outer contour.

© XINDUX Industrial Solutions GmbH · X-S-WBF01 · 05.11.2026 · mm

; 6 :%) _