

SUPPORT
ARM



PANEL
SYSTEMS

XINDUX[®]
Industrial Solutions GmbH

EVERYWHERE IN EVERY CORNER INTERNATIONAL BRAND

XINDUX®, with its expert and professional team, have been supplying operator arm and control panel systems to many countries all over the world, providing products specialized in the field of machinery and industrial automation production.

Wide range of countries; Italy, Spain, Portugal, The Netherlands, Belgium, Germany, Australia, New Zealand, Switzerland, Denmark, Sweden, United Kingdom, Ireland, Finland, Hungary, Slovenia, Slovakia, South Korea, Taiwan, Indonesia, Singapore, China, Russia, Belarus, Balkan Countries, Czech Republic, Croatia, Poland, India, Egypt, Canada, United States, XINDUX® aims to become the world leader with its A-class products in Brazil, Mexico, Qatar, Cyprus, Jordan, Israel, Lebanon, Iran, Palestine, Saudi Arabia, United Arab Emirates, Oman, Kuwait and Bahrain.

We are a professional team that constantly expands its network through our international business partners while maintaining our high-quality products at the forefront.





ABOUT XINDUX®

XINDUX®, with its years of expertise and a professional team, has designed an array of Support Arm Systems and Control Panels, distinguished by their modern structure, durability, and safe and easy usage. This commitment to excellence places XINDUX® ahead of its competitors in the market.

The XINDUX® team meticulously monitors the production process from the raw material stage through to the final product. In collaboration with certified laboratories, we conduct rigorous tests and analyses before any product is released into the market. These tests and analyses ensure that our products conform to international standards, underlining our commitment to provide 100% reliable and trusted products to our customers.

Furthermore, XINDUX® proudly guarantees the quality and the attention given to its entire range of products with Brand Registration Certificate, Utility Model Certificate, Design Registration Certificate, CE, and IP Certificates.

Adding to our commitment to excellence, we are proud to state that our assembled products are "Made in Germany." This designation is not just a mark of quality but a testament to the precision, reliability, and innovation embedded in every product we offer. When you choose XINDUX®, you're choosing a product that embodies the renowned craftsmanship and engineering expertise synonymous with German manufacturing.



INDEX

SUPPORT
ARM










PANEL
SYSTEMS



04	EXPORT COUNTRIES
06	ABOUT US
10	LOAD DIAGRAM
12	SUPPORT ARM SYSTEM
78	ENCLOSURE PANEL
96	PANEL WALL
	MOUNTING APPLICATION
98	FRONT SHEET
	INSTALLATION
99	FRONT SHEET
	UNPROCESSED
102	KIOSK SYSTEM
116	COUPLING TOWERS
120	WARNING LAMP
126	LOCATION



LOAD DIAGRAM

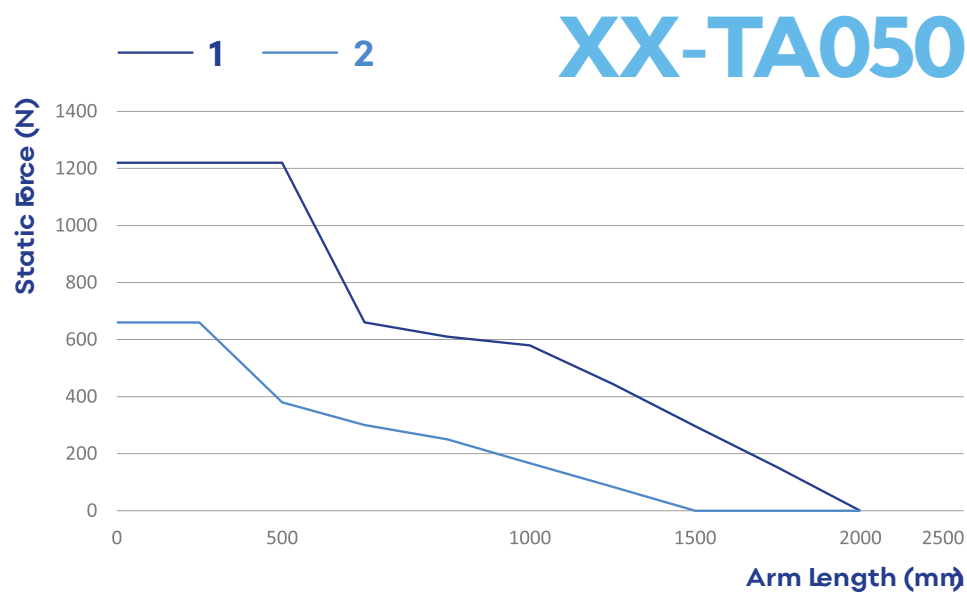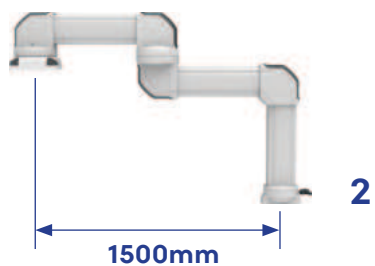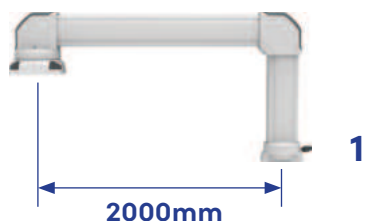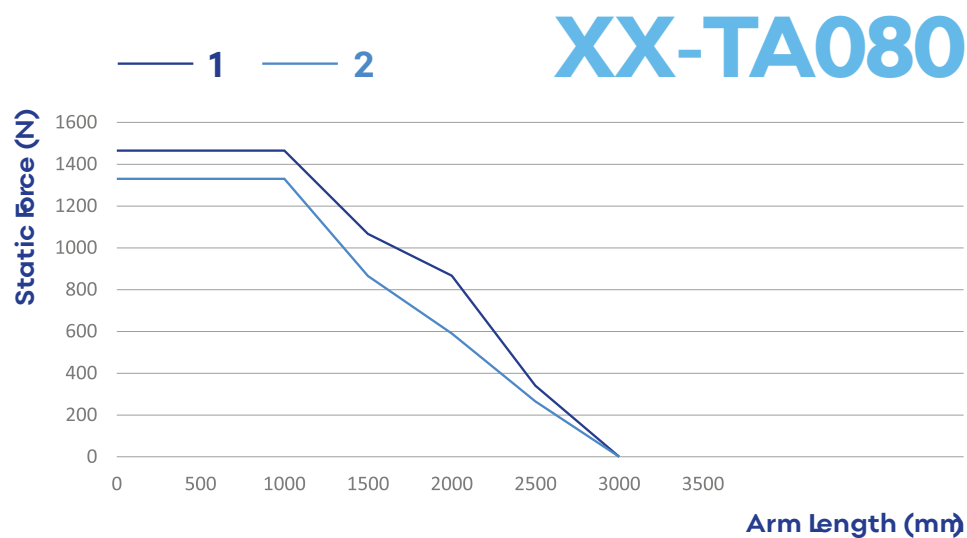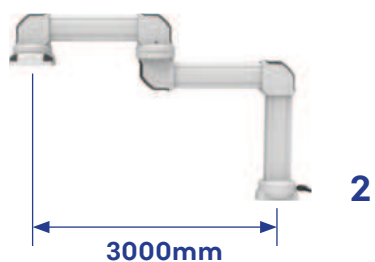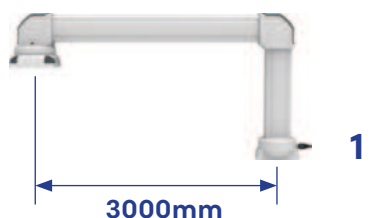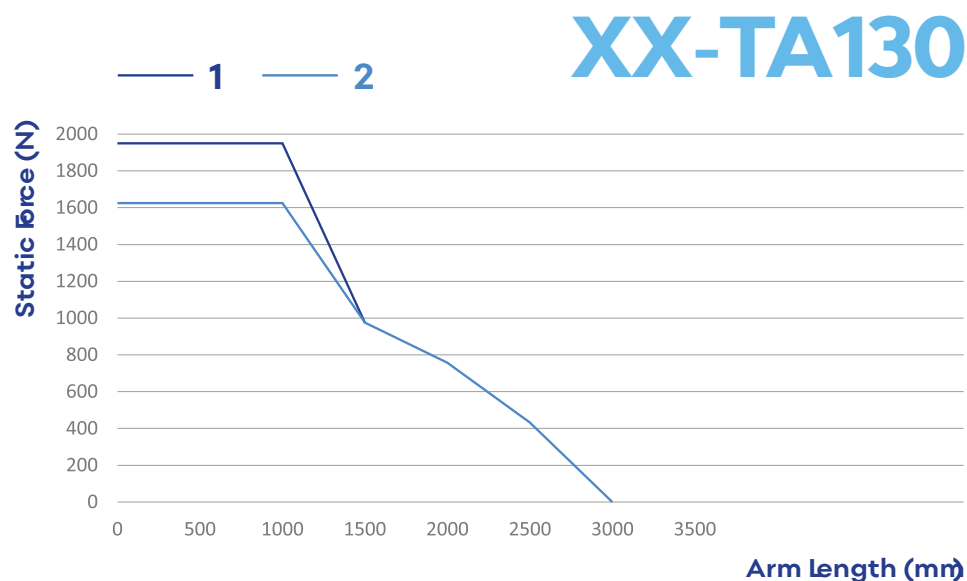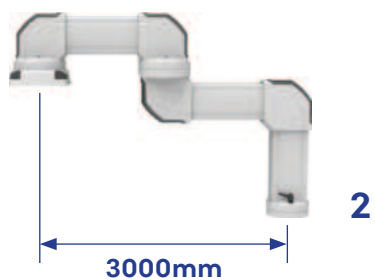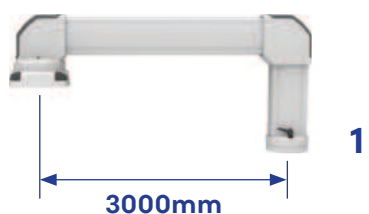

SUPPORT ARM SYSTEMS





NEW

XX-TA130.900

Height Adjustable
Support Arm




NEW

XX-TA080.900

Height Adjustable
Support Arm



HEIGHT ADJUSTABLE

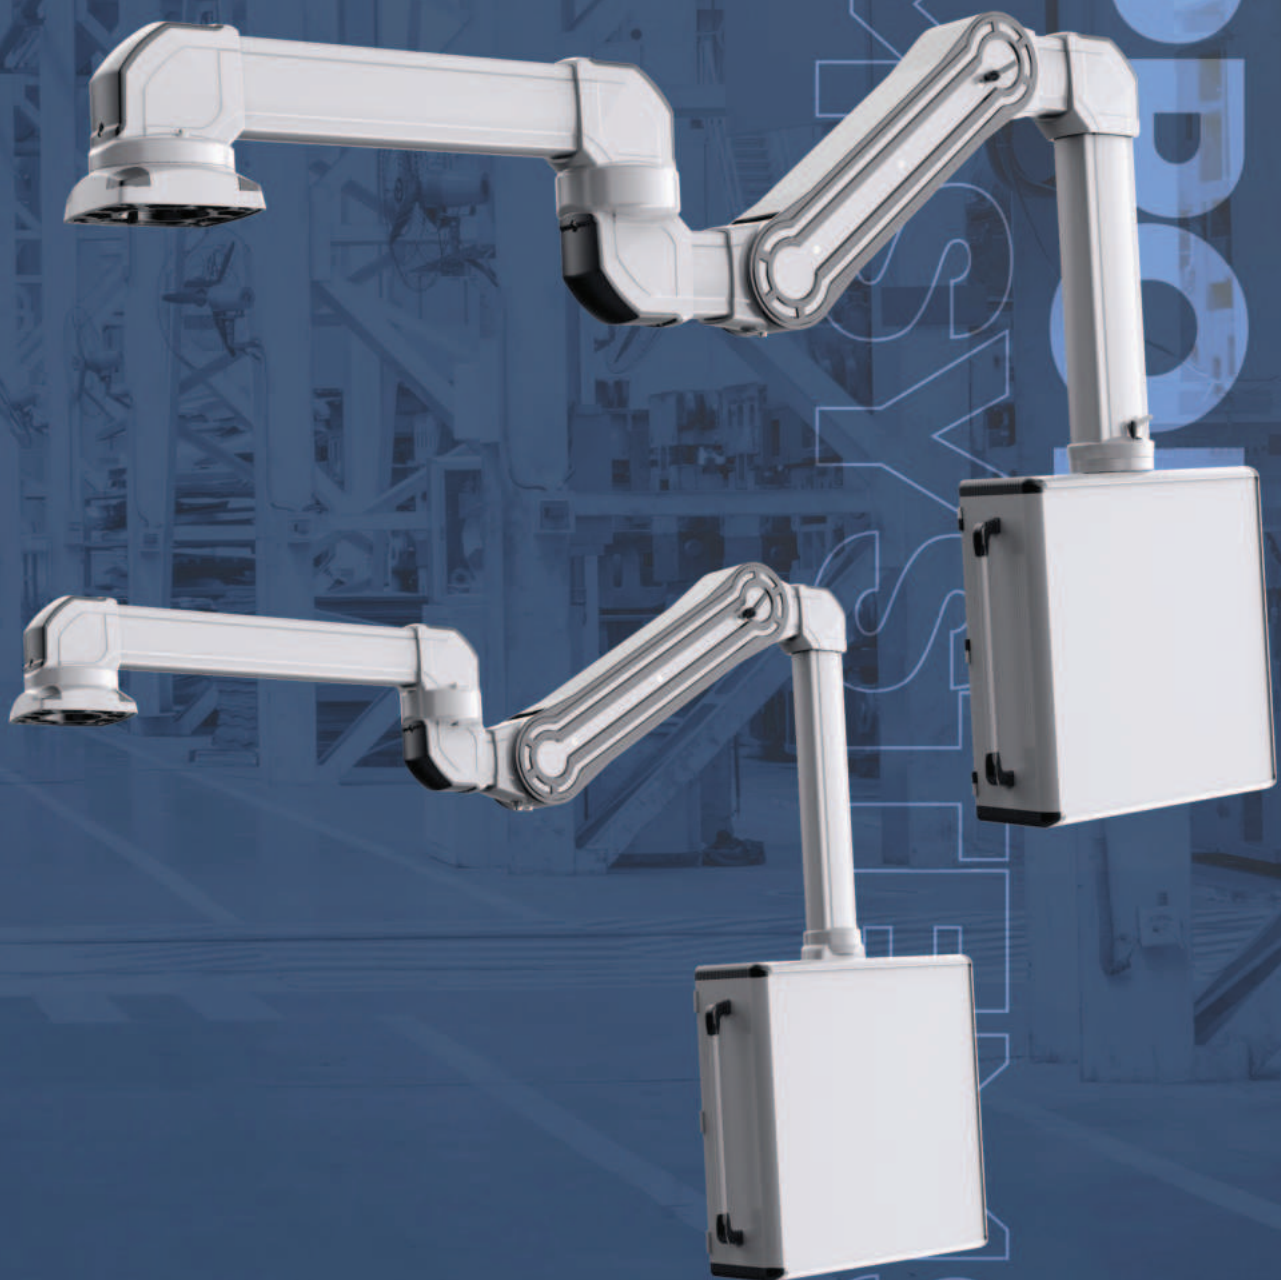

XX-TA050




1	XX-TA050 PROFILE	Support Arm Profile
2	XX-TA050.400	Rotatable Panel 90° Angle Coupling
3	XX-TA050.420	90° Angle Piece
4	XX-TA050.500	Rotatable Intermediate Hinge
5	XX-TA050.600	Rotatable Top Mounted 90° Angle Joint
6	XX-TA050.610	Rotatable Top Mounted Vertical Outlet
7	XX-TA050.700	Rotatable Wall-Mounted Hinge Horizontal Outlet
8	XX-TA050.710	Rotatable Wall-Mounted Hinge Vertical Outlet
9	XX-TA050.800	Wall-Socket Mounting Bracket
10	XX-TA050.810	Warning Lamp Cover (M22)
11	XX-TA050.811	Warning Lamp Cover (M18)
12	XX-TA050.830	Rotatable Panel Adaptor Vertical
13	XX-TA080.831	10° Angle Piece
14	XX-TA080.832	080 Adaptor
15	XX-TA080.834	Panel Tilting Adaptor
16	XX-TA080.835	Vesa Panel Tilting Adaptor
17	XX-TA090 PANEL	PS090 Enclosure Panel

Support Arm Systems

Support Arm Profile

XX-TA050.025

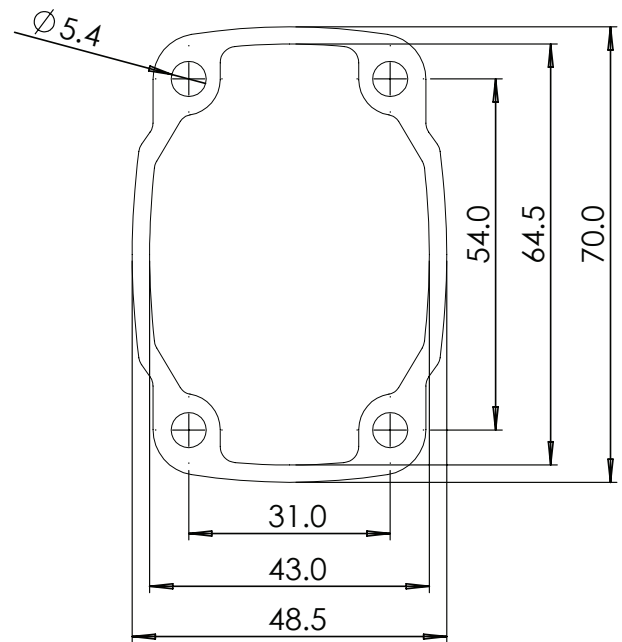

The series of XX-TA050 Operator Arm Systems are suitable for short length arm applications produced for panels carrying light loads. This operator support arm series offers many functional solutions with its wide range components. An operator arm of 1 m length can carry loads weighing up to 50 kg. Code RAL 7035 is a light gray paint used for this product with sealing feature.


Model No	Description	Length (mm)	Weight (mm)	Ral Code	Package Dimension
XX-TA050.025	050 Support Profile - 250mm	250	500	7035	50 x 75 x 260
XX-TA050.050	050 Support Profile - 500mm	500	1000	7035	50 x 75 x 510
XX-TA050.075	050 Support Profile - 750mm	750	1500	7035	50 x 75 x 760
XX-TA050.100	050 Support Profile - 1000mm	1000	2000	7035	50 x 75 x 1010
XX-TA050.125	050 Support Profile - 1250mm	1250	2500	7035	50 x 75 x 1260
XX-TA050.150	050 Support Profile - 1500mm	1500	3000	7035	50 x 75 x 1510
XX-TA050.175	050 Support Profile - 1750mm	1750	3500	7035	50 x 75 x 1760
XX-TA050.200	050 Support Profile - 2000mm	2000	4000	7035	50 x 75 x 2010

XX-TA050

Support Arm Systems

XX-TA050.400

Rotatable Panel 90° Angle Coupling

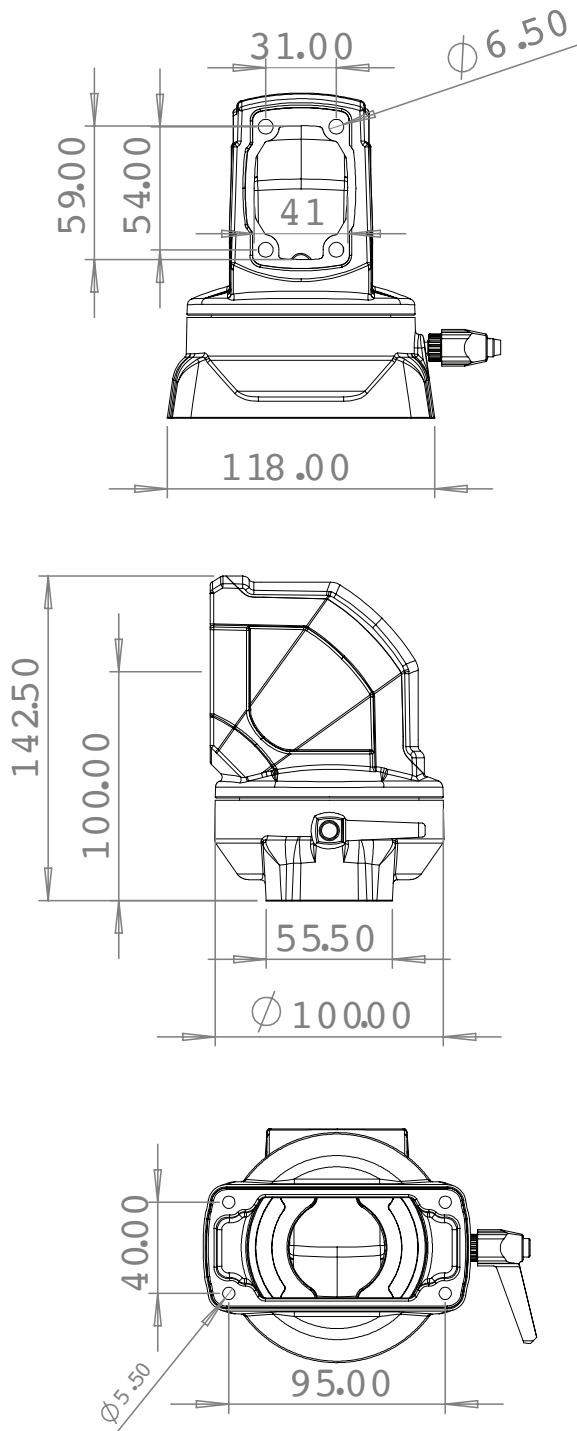

XX-TA050.400 Rotatable Panel 90° Angle Coupling is suitable for an operator panel that requires positioning directly after a 90° angle corner turn. The rotation angle is 315° in total. The ability to rotate around itself provides flexibility for the operator using the panel in bringing it to a desired position. XX-TA050.400 is an ideal product that will be used for the panel types with more depth.



Weight	1000 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	140x155x110 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA050


Support Arm Systems

90° Angle Piece

XX-TA050.420

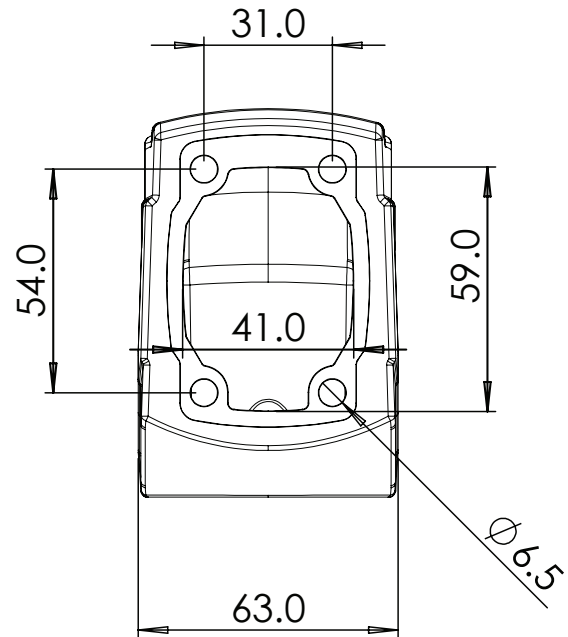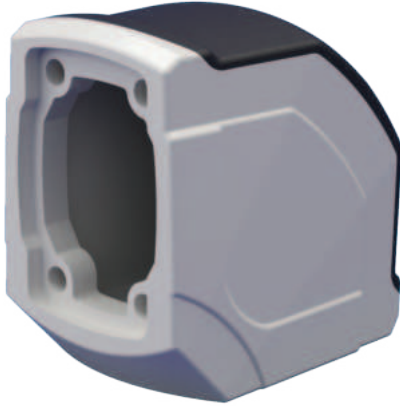

XX-TA050.420 90° Angle Piece is a fixed corner module that connects the operator arms in horizontal and vertical axis. Based on the structural features and usage conditions, this product can be used for light loads panels positioned in short distance and without any compatibility issues.

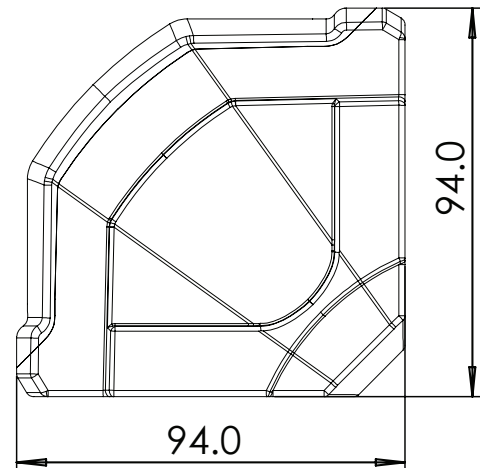


Weight	365 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	110x65x95 mm
Material	Aluminum
Movement	Fixed

XX-TA050


Support Arm Systems

XX-TA050.500

Rotatable Intermediate Hinge

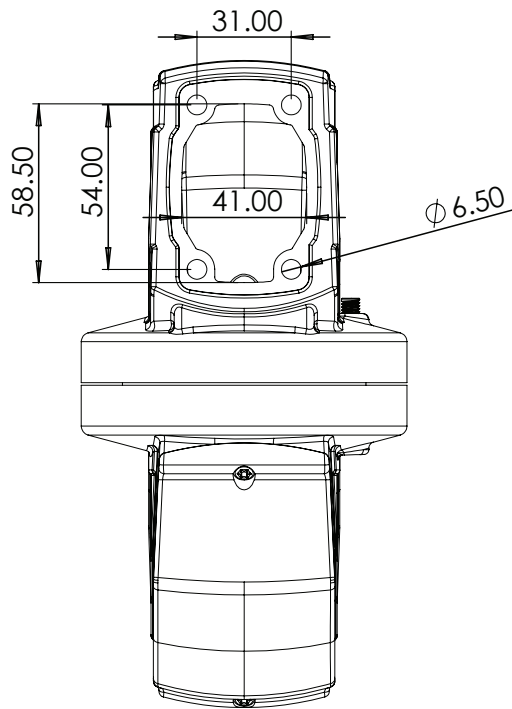

XX-TA050.500 Rotatable Intermediate Hinge module is used to ensure two operator arms on the horizontal axis are mounted on the assembly point and move at a semi-independent angel (315°) from each other. This product is an indispensable product for light loads and short lenght configurations in terms of structure and usage.

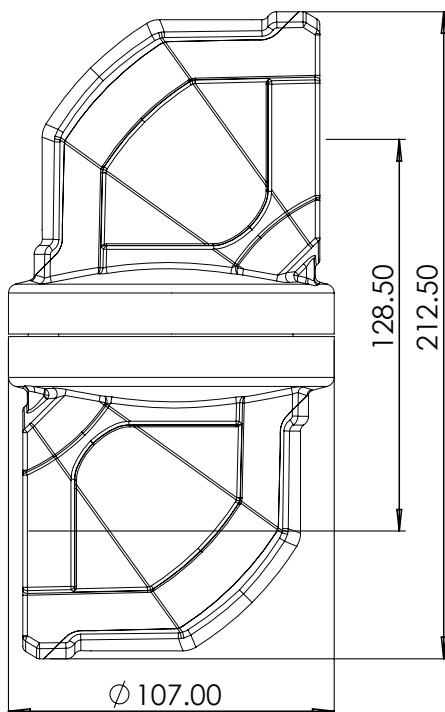


Weight	1725 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	220x120x115 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA050

Support Arm Systems





Rotatable Top Mounted 90° Angle Joint

XX-TA050.600

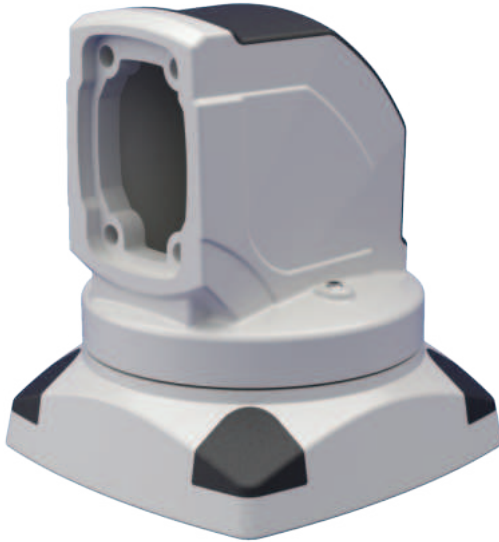

XX-TA050.600 Rotatable Top Mounted 90° Angle Joint is produced to provide a connection for a high position point. It allows a smooth rotation for the panel horizontally and provides a 315° movement mobility to the right or left. This product is manufactured for light weight configurations.

Weight	1700 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	140x145x130 mm
Material	Aluminum
Movement	Rotatable 315°

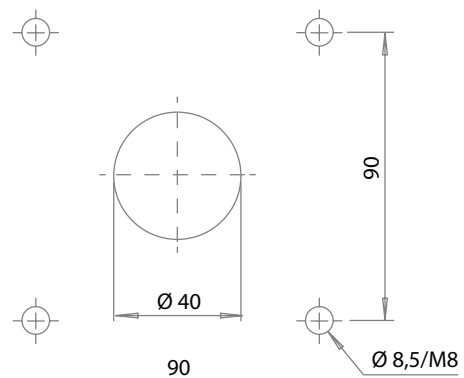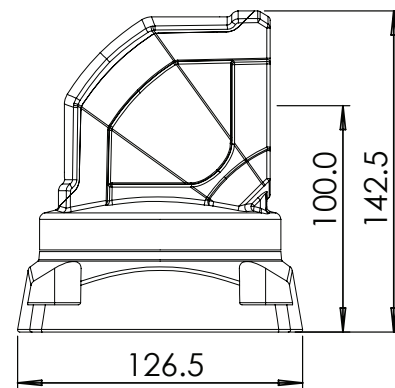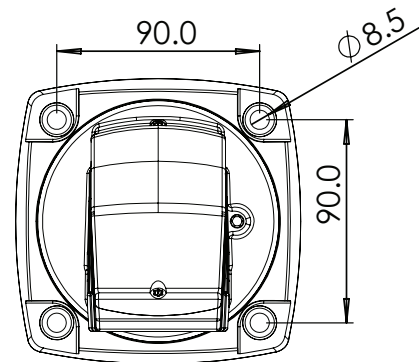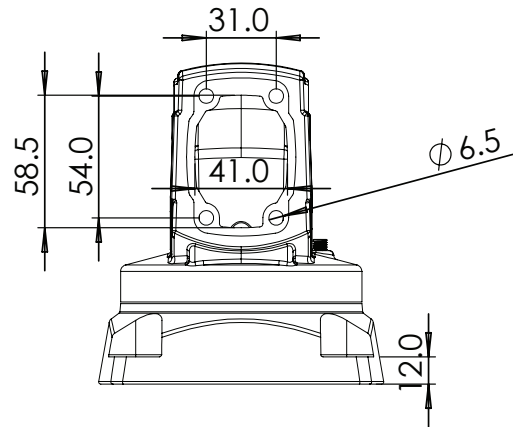


XX-TA050


Support Arm Systems

XX-TA050.610

Rotatable Top Mounted Vertical Outlet

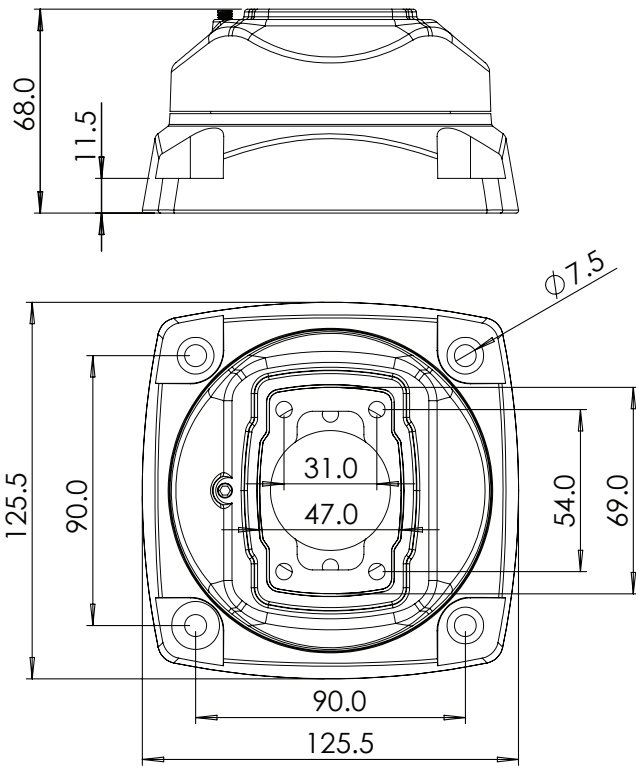

XX-TA050.610 Rotatable Top Mounted Vertical Outlet provides a 315° rotation movement to the right and left. It is designated for light loads configurations and can also serve as a "Fixed Kiosk".

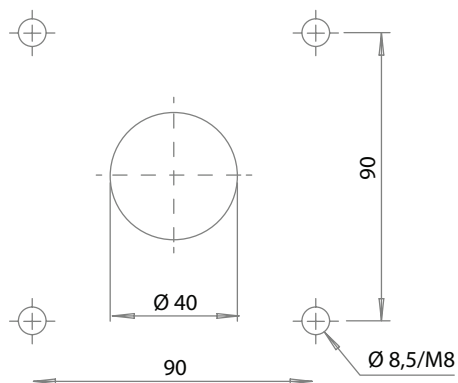

Weight	1565 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	145x85x130 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA050




Support Arm Systems

Rotatable Wall-Mounted Hinge Horizontal Outlet

XX-TA050.700




XX-TA050.700 Rotatable Wall-Mounted Hinge Horizontal Outlet is designed to create a connection point to any preferred point where it is unavailable on the ground. It allows the operator arm to move at a 315° left and right horizontally for light loads configurations.

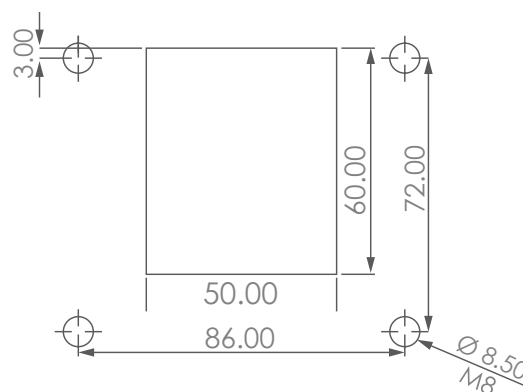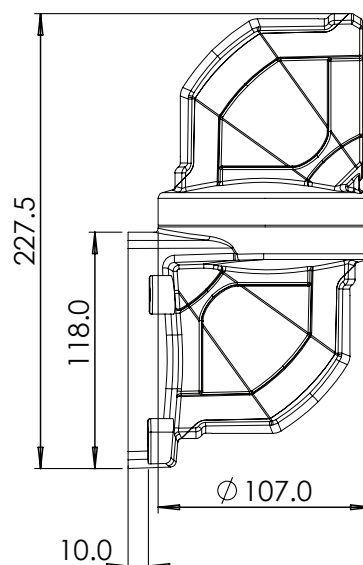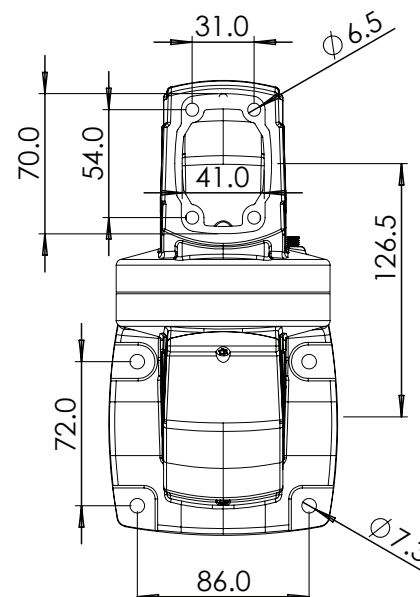

Weight	1920 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	245x140x130 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA050

XX-TA050.710

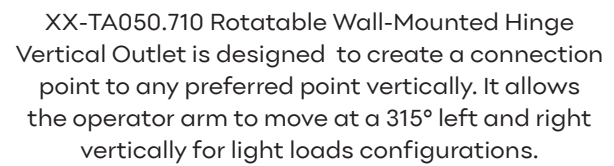[illegible]

Weight	1770 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	180x130x125 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA050




Support Arm Systems

Wall-Socket Mounting Bracket

XX-TA050.800



XX-TA050.800 Wall-Socket Mounting Bracket is a fixed connection that can be easily connected to vertical and horizontal surfaces. It is produced for light loads configurations.

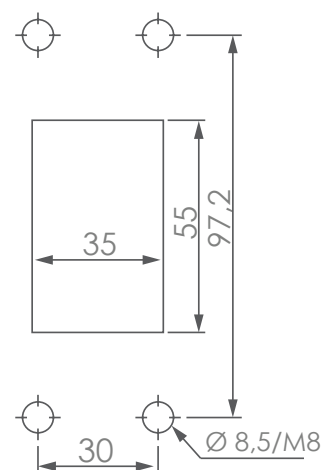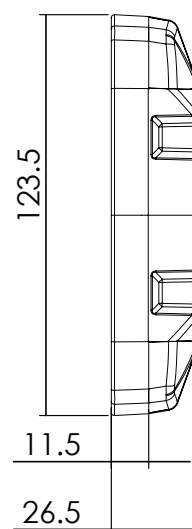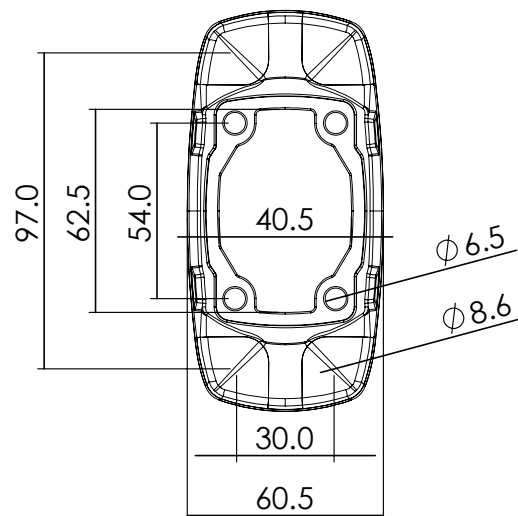


Weight	1000 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	140x30x65 mm
Material	Aluminum
Movement	Fixed

XX-TA050



Support Arm Systems

XX-TA050.810

Warning Lamp Cover (M22)

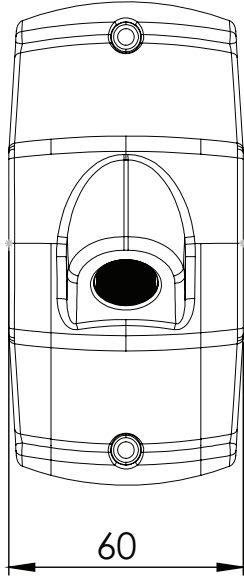

Ø 19.5
M22

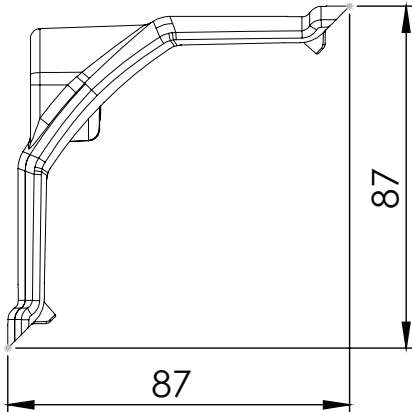

XX-TA050.810 Warning Lamp Cover (M22) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M22×1.5

* Warning lamp hole can be drilled with the desired size.

Weight	130 gr
Color Ral No	RAL 7016
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Fixed

XX-TA050

Support Arm Systems




Warning Lamp Cover (M18)

XX-TA050.811



XX-TA050.811 Warning Lamp Cover (M18) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M18×1.5

* Warning lamp hole can be drilled with the desired size

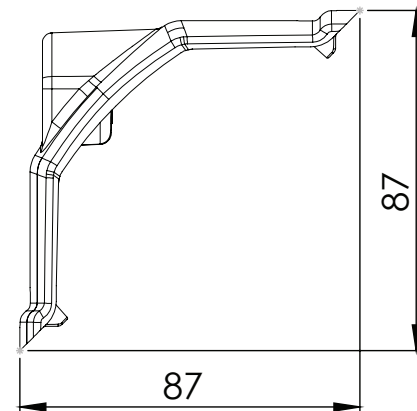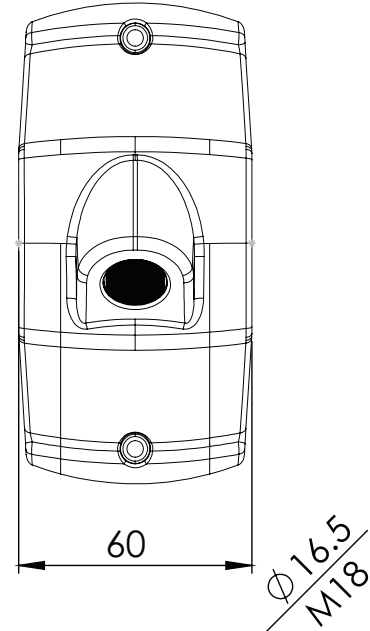


Weight	130 gr
Color Ral No	RAL 7016
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Fixed

XX-TA050

Support Arm Systems

XX-TA050.830

Rotatable Panel Adaptor Vertical

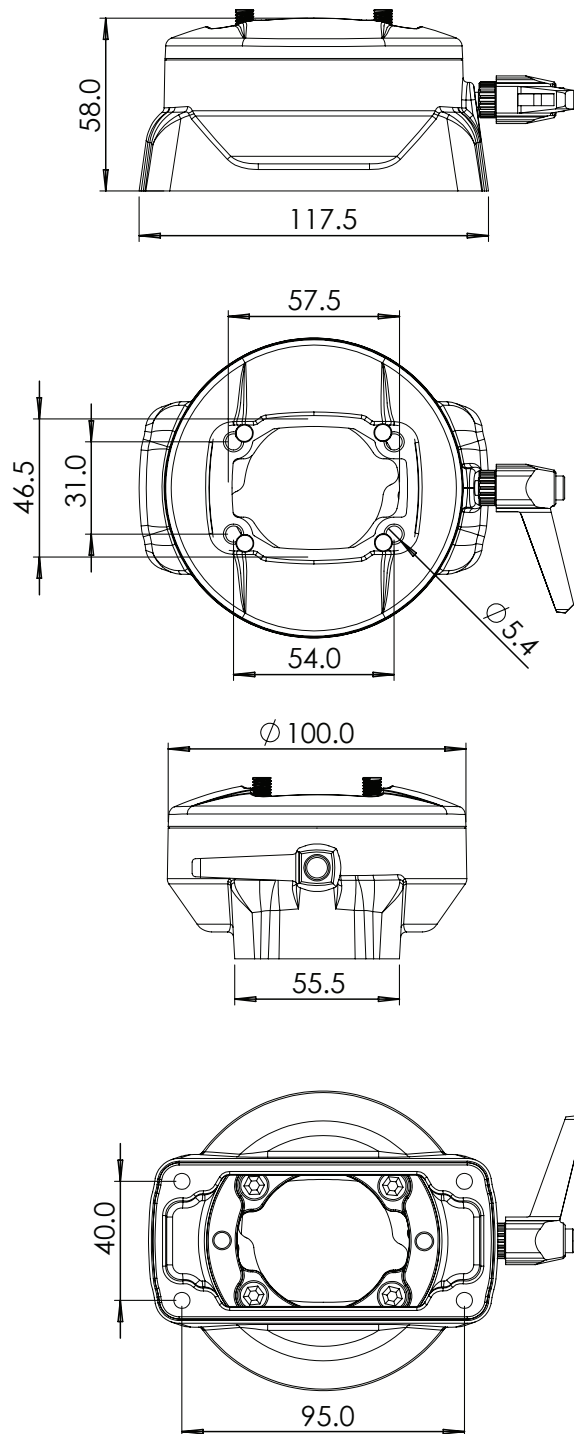


XX-TA050.830 Rotatable Panel Adaptor Vertical is the connector between the operator panel and the operator arm. The dimension of the adaptor surface is 118x65mm which allows a 315° smooth rotation to the left and right. This product is designed for light loads and a suitable depth ratio.

Weight	720 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	135x70x110 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA050

SUPPORT ARM SYSTEMS

XX-TA080

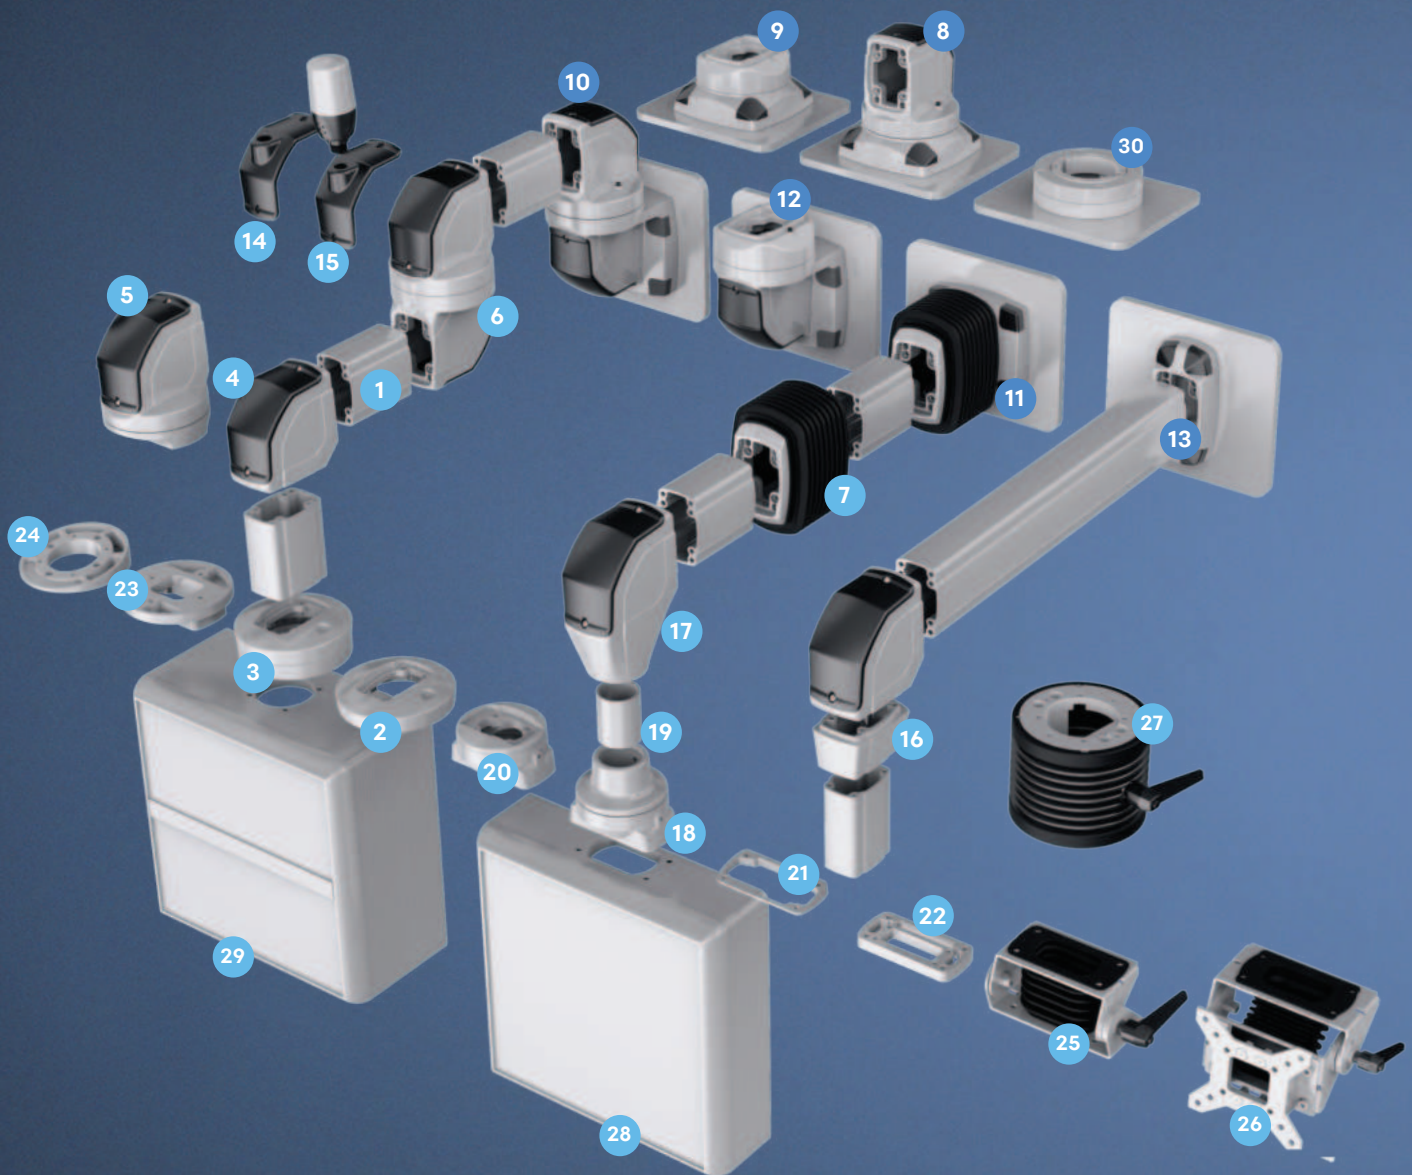


XX-TA080

1	XX-TA080 PROFILE	Support Arm Profile
2	XX-TA080.310	Panel Coupling
3	XX-TA080.320	Rotatable Panel Coupling
4	XX-TA080.400	Rotatable Panel 90° Angle Coupling
5	XX-TA080.420	90° Angle Piece
6	XX-TA080.500	Rotatable Intermediate Hinge
7	XX-TA080.505	Steel Interconnection Module - With Bellows
8	XX-TA080.600	Rotatable Top Mounted 90° Angle Joint
9	XX-TA080.610	Rotatable Top Mounted Vertical Outlet
10	XX-TA080.700	Rotatable Wall-Mounted Hinge Horizontal Outlet
11	XX-TA080.705	Steel Wall Mounted Module - With Bellows
12	XX-TA080.710	Rotatable Wall-Mounted Hinge Vertical Outlet
13	XX-TA080.800	Wall-Socket Mounting Bracket
14	XX-TA080.810	Warning Lamp Cover (M22)
15	XX-TA080.811	Warning Lamp Cover (M18)
16	XX-TA080.820	080/050 Support Arm Adaptor
17	XX-TA080.825	080/Ø48 Adaptor
18	XX-TA080.826	Ø48 Adaptor
19	XX-TA080.827	Ø48 Pipe Profile
20	XX-TA080.830	Rotatable Panel Adaptor Vertical
21	XX-TA080.831	10° Angle Piece
22	XX-TA080.832	080 Panel Adaptor
23	XX-TA080.833	Ø134 mm Panel Adaptor
24	XX-TA080.834	Ø134 mm 10° Panel Adaptor
25	XX-TA080.835	Panel Tilting Adaptor
26	XX-TA080.836	Vesa Panel Tilting Adaptor
27	XX-TA080.840	Ø130 mm Panel Tilting Adaptor - With Bellows
28	XX-TA060 PANEL	PS060 Enclosure Panel
29	XX-TA130 PANEL	PS130 Enclosure Panel
30	XX-TA080.321	Rotatable Panel Coupling

Support Arm Systems

Support Arm Profile

XX-TA080.025

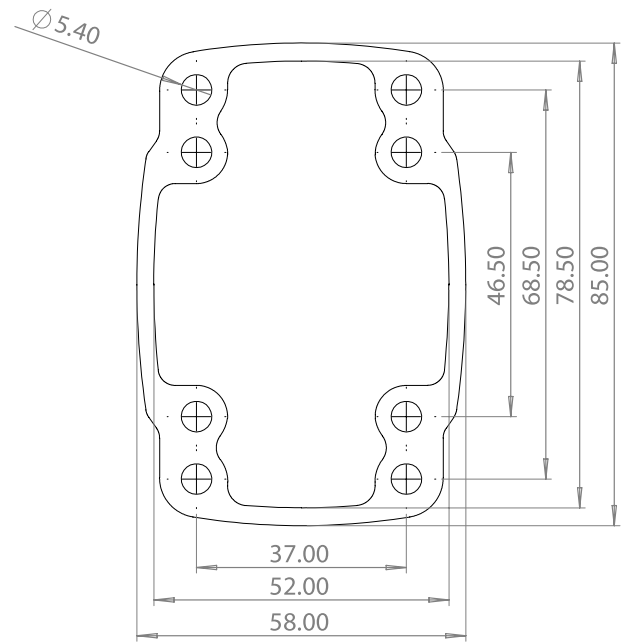

XX-TA080 Operator Arm Systems determines the working and movement area of the XX-TA series. It is produced for medium-sized control panels. In addition to its modern structure, it is designed with advanced technology conditions and works with other modules at high efficiency bringing the operator arm to the fore. This operator arm can be produced in any requested lengths. The load capacity of a 1m long operator arm is up to 80kg. RAL 7035 light gray paint is used for this module with also sealing feature.



Model No	Description	Length (mm)	Weight (mm)	Ral Code	Package Dimension
XX-TA080.025	080 Support Profile - 250mm	250	1000	7035	55 x 90 x 260
XX-TA080.050	080 Support Profile - 500mm	500	2000	7035	55 x 90 x 510
XX-TA080.075	080 Support Profile - 750mm	750	3000	7035	55 x 90 x 760
XX-TA080.100	080 Support Profile - 1000mm	1000	4000	7035	55 x 90 x 1010
XX-TA080.125	080 Support Profile - 1250mm	1250	5000	7035	55 x 90 x 1260
XX-TA080.150	080 Support Profile - 1500mm	1500	6000	7035	55 x 90 x 1510
XX-TA080.175	080 Support Profile - 1750mm	1750	7000	7035	55 x 90 x 1760
XX-TA080.200	080 Support Profile - 2000mm	2000	8000	7035	55 x 90 x 2010

XX-TA080


Support Arm Systems

XX-TA080.310

Panel Coupling

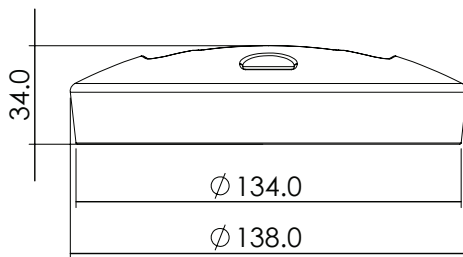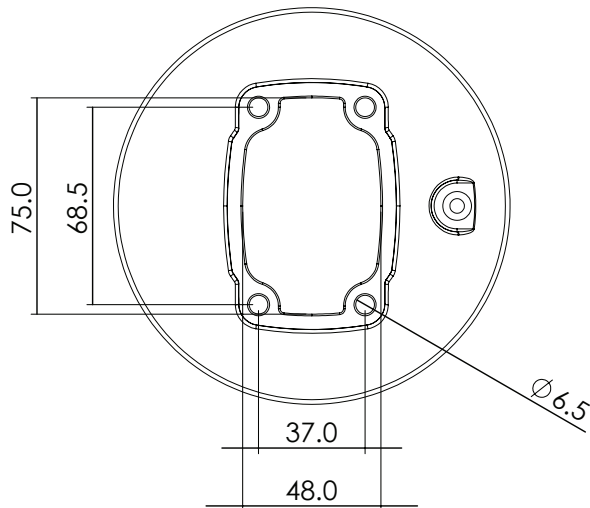

Ø134mm Panel Coupling provides the connection between the operator arm and the operator panel. XX-TA080.310 is a fixed module. The diameter is 130mm and produced for wide panels with depth.

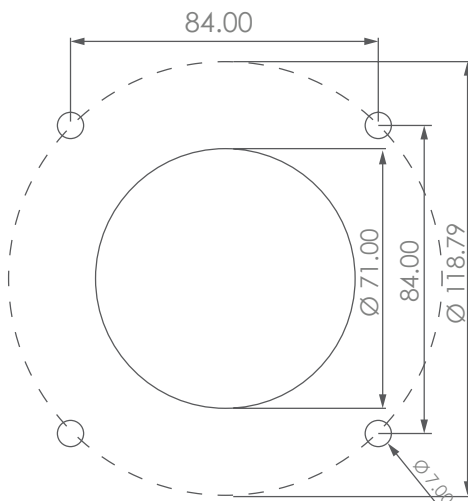





Weight	440 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	135x40x135 mm
Material	Aluminum
Movement	Fixed
Diameter	Ø134 mm

XX-TA080

Support Arm Systems

Rotatable Panel Coupling

XX-TA080.320

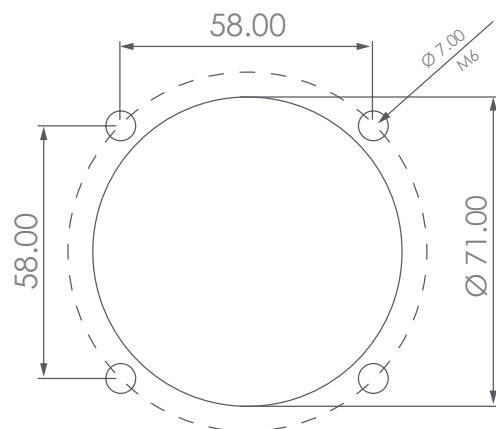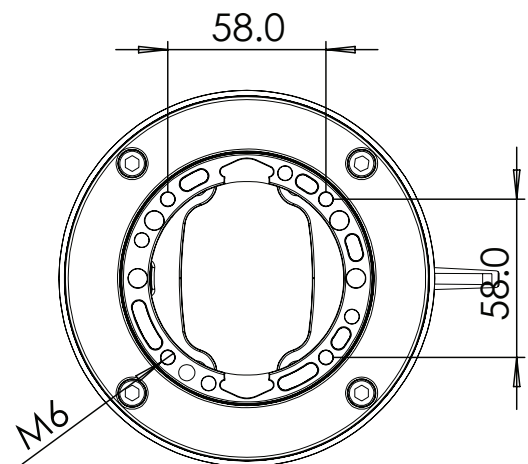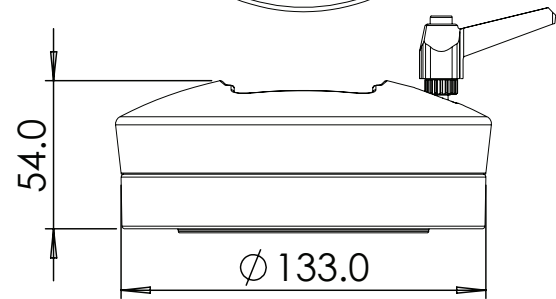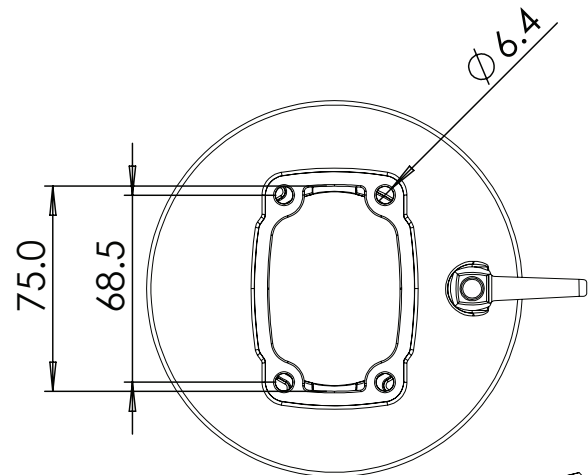

XX-TA080.320 Rotatable Panel Coupling provides the connection between the operator arm and the operator panel. The diameter is 133mm with a rotation capacity of 315° allowing the operator to rotate the panel to any desired position. It is produced for panel types with high depth ratio.


Weight	1240 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	150x65x140 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø133 mm

XX-TA080

Support Arm Systems

XX-TA080.400

Rotatable Panel 90° Angle Coupling

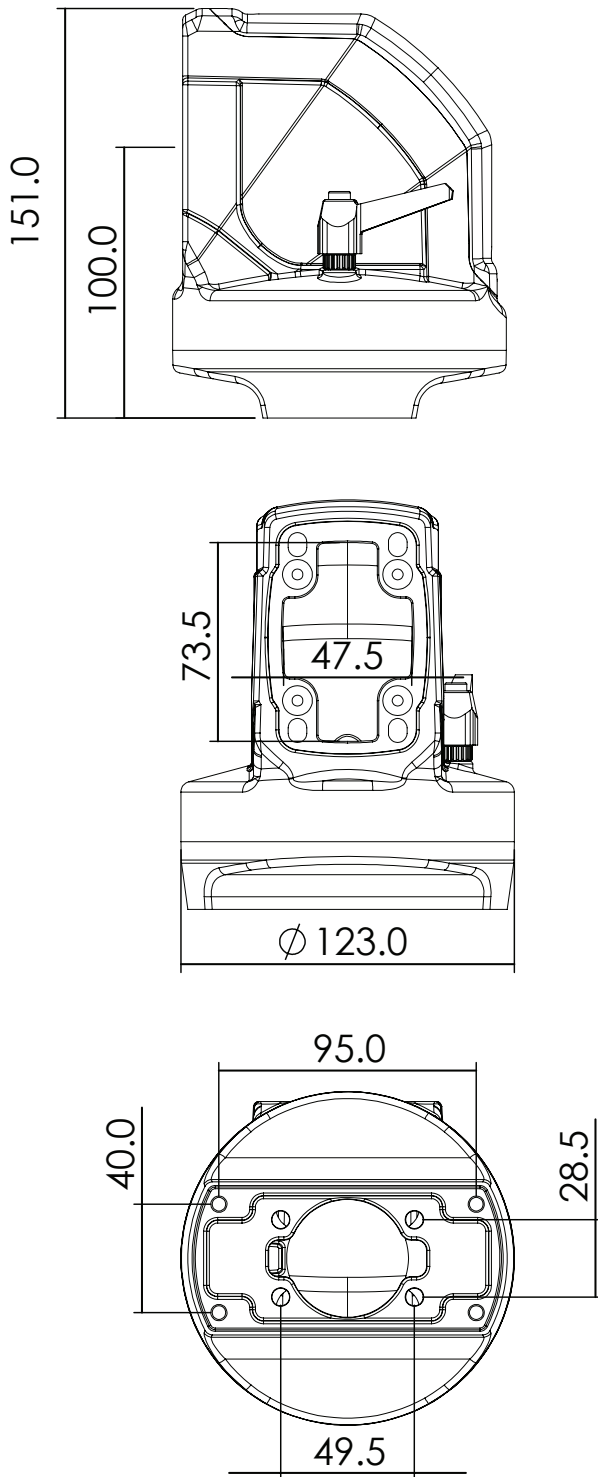

XX-TA080.400 Rotatable Panel 90° Angle Coupling is suitable for an operator panel that requires positioning directly after a 90° angle corner turn. Max. diameter is 123mm and the rotation angle is 315° in total. The ability to rotate around itself provides flexibility for the operator using the panel in bringing it to a desired position. XX-TA080.400 is an ideal product that will be used for the panel types with more depth.


Weight	1780 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø123 mm

XX-TA080



Support Arm Systems

90° Angle Piece

XX-TA080.420

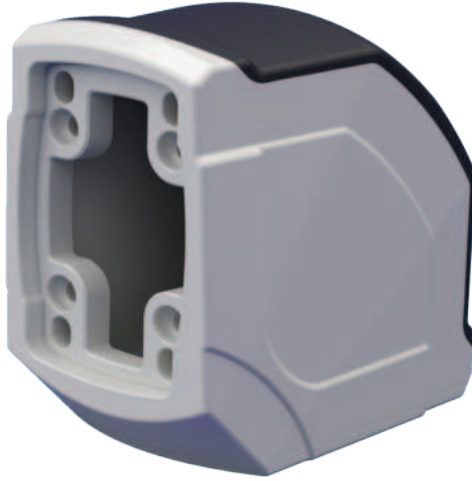

XX-TA080.420 90° Angle Piece is a fixed corner module that connects the operator arms in horizontal and vertical axis. Based on the structural features and usage conditions, this product can be used for medium loads panels positioned in medium distance and without any compatibility issues.

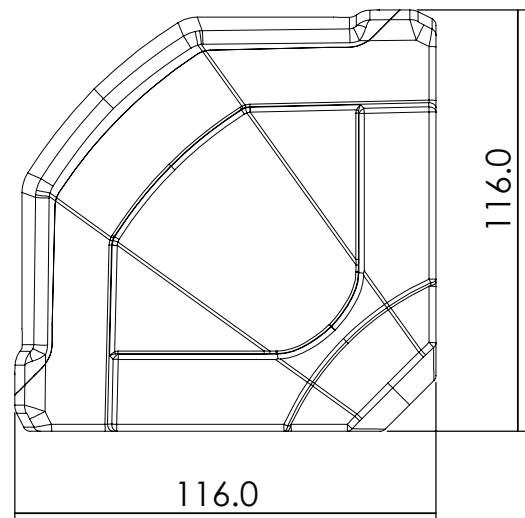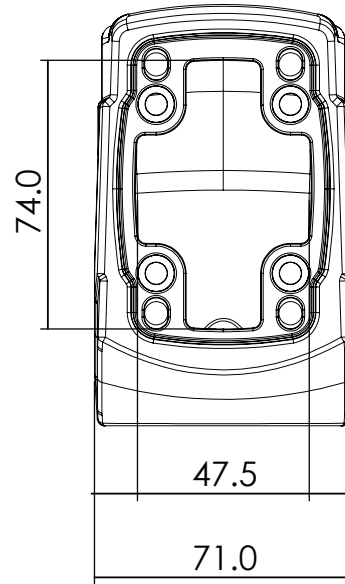


Weight	640 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	125x75x115 mm
Material	Aluminum
Movement	Fixed

XX-TA080

Support Arm Systems

XX-TA080.500

Rotatable Intermediate Hinge

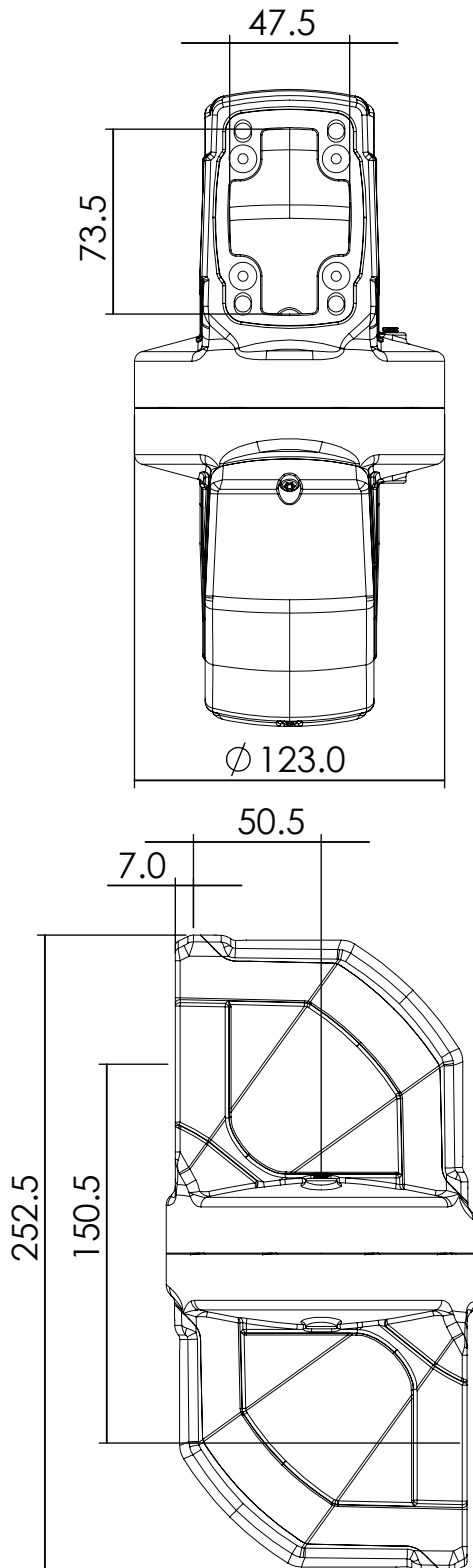

XX-TA080.500 Rotatable Intermediate Hinge module is used to ensure two operator arms on the horizontal axis are mounted on the assembly point and move at a semi-independent angel (315°) from each other. This product is an indispensable product for medium loads and medium length configurations in terms of structure and usage.

Weight	2060 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	250x130x125 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA080



Support Arm Systems

Steel Interconnection Module - With Bellows

XX-TA080.505



XX-TA080.505 Steel Interconnection Module - With Bellows is used to mount two operator arms to the connection points horizontally enabling them to move at 90° to the right or 90° to the left. The cast steel body of this product safely combines heavy and long arm configurations.

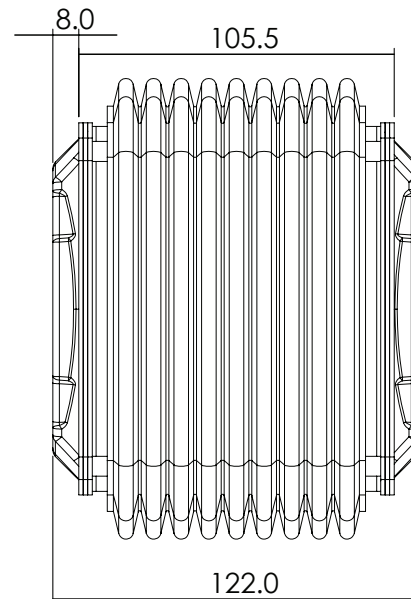
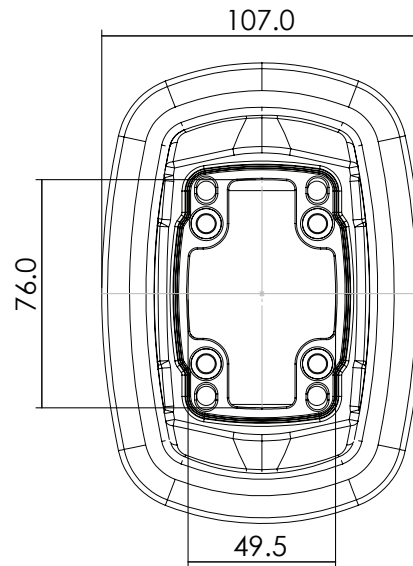


Weight	2200 gr
Color Ral No	RAL 7035 / Bellow RAL 7016
Package	1
Package Dimension	180x140x120 mm
Material	Steel Casting
Movement	Right 90° - Left 90°

XX-TA080

Support Arm Systems

XX-TA080.600 Rotatable Top Mounted 90° Angle Joint

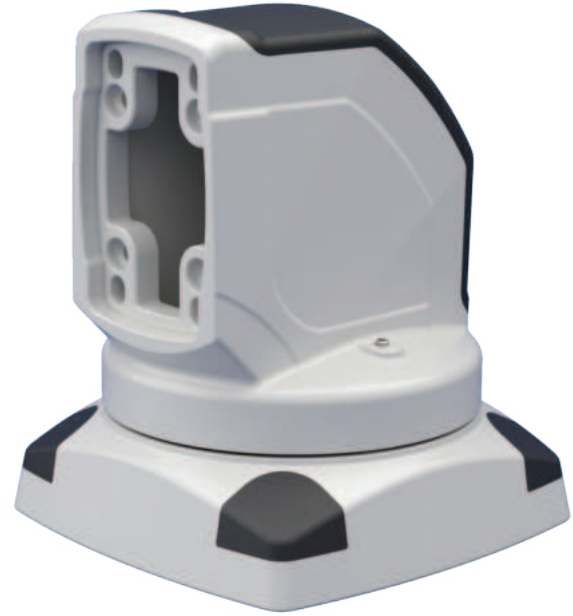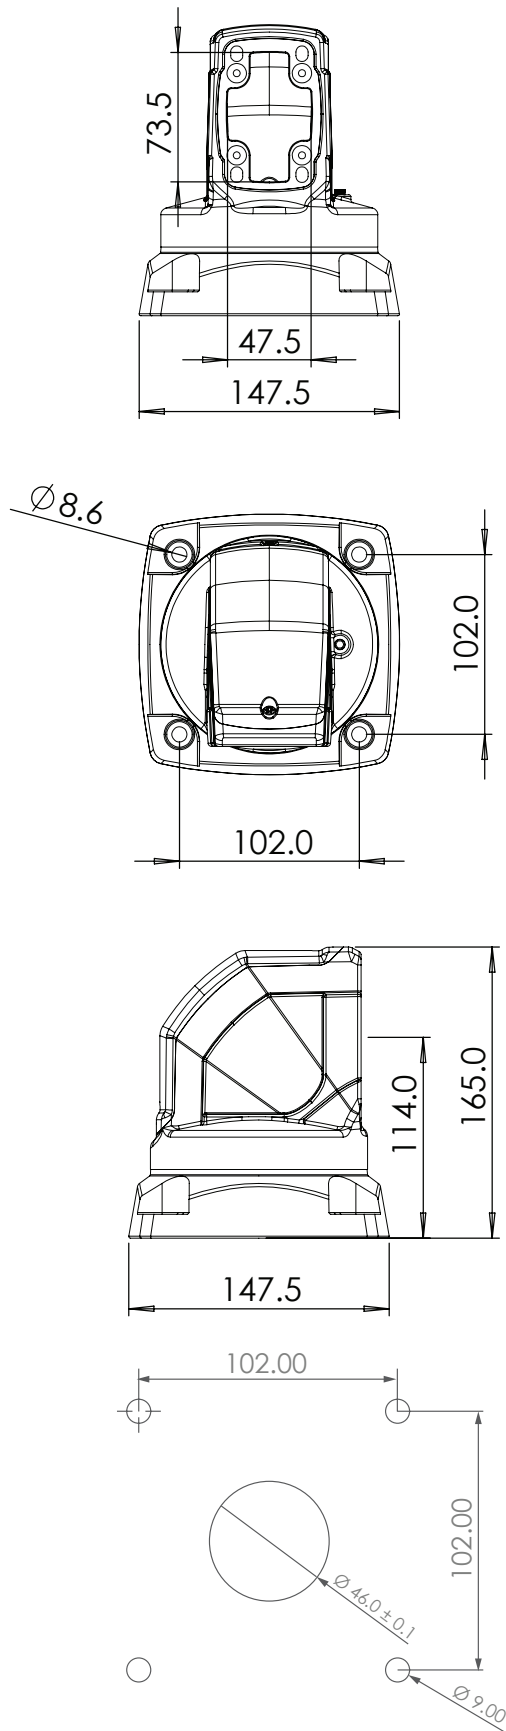

XX-TA080.600 Rotatable Top Mounted 90° Angle Joint is produced to provide a connection for a high position point. It allows a smooth rotation for the panel horizontally and provides a 315° movement mobility to the right or left. This product is designated for configurations with medium loads.

Weight	2590 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	160x170x150 mm
Material	Aluminum
Movement	Rotatable 315°




Support Arm Systems

Rotatable Top Mounted Vertical Outlet

XX-TA080.610



XX-TA080.610 Rotatable Top Mounted Vertical Outlet provides a 315° rotation movement to the right and left. It is designated for medium loads configurations and can also serve as a "Fixed Kiosk"

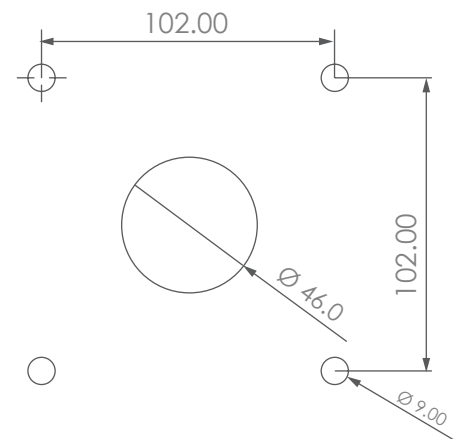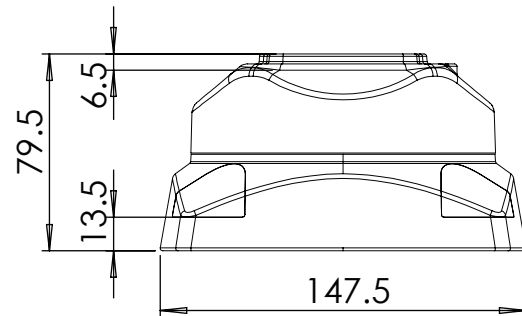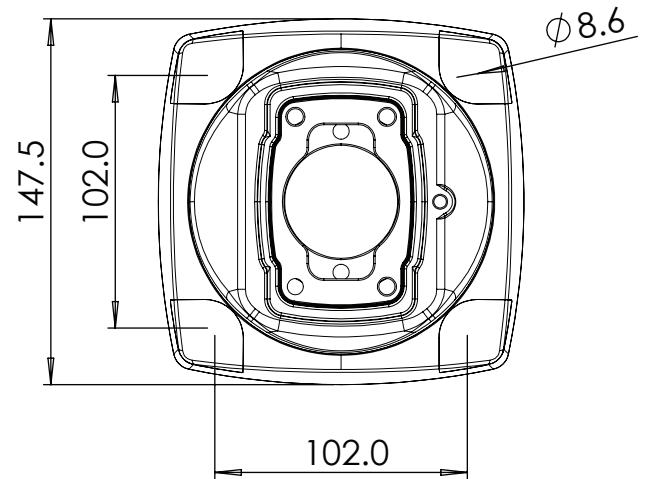


Weight	1950 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	155x90x140 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA080

Support Arm Systems

XX-TA080.700

Rotatable Wall-Mounted Hinge Horizontal Outlet

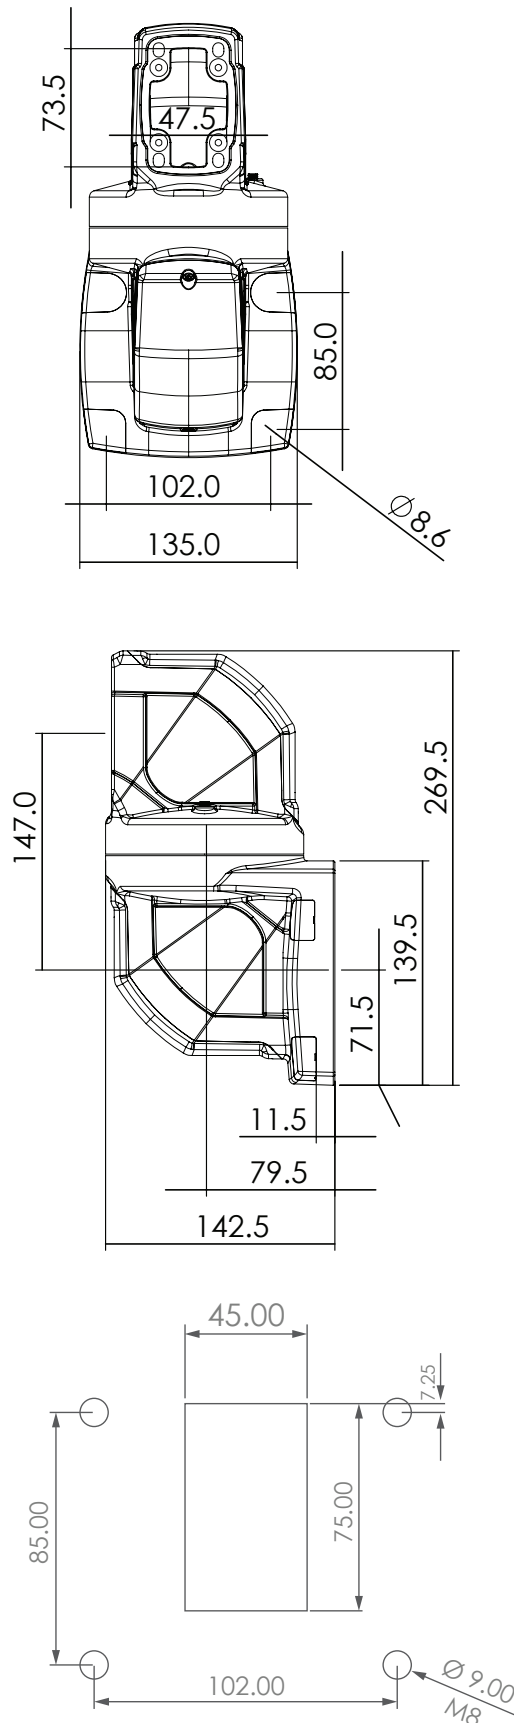

XX-TA080.700 Rotatable Wall-Mounted Hinge Horizontal Outlet is designed to create a connection point to any preferred point where it is unavailable on the ground. It allows the operator arm to move at a 315° left and right horizontally for medium loads configurations.

Weight	2550 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	275x145x150 mm
Material	Aluminum
Movement	Rotatable 315°



Support Arm Systems

Steel Wall Mounted Module - With Bellows

XX-TA080.705



The Steel Wall-Mounted Module - With Bellows helps fixing the operator arms horizontally which are positioned on vertical surfaces. This product with its cast steel body gives reliability for heavy loads and long-distance arm configurations. It allows a mobility of 90° to the right and left.

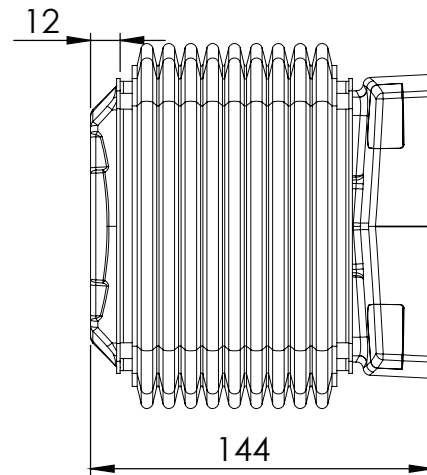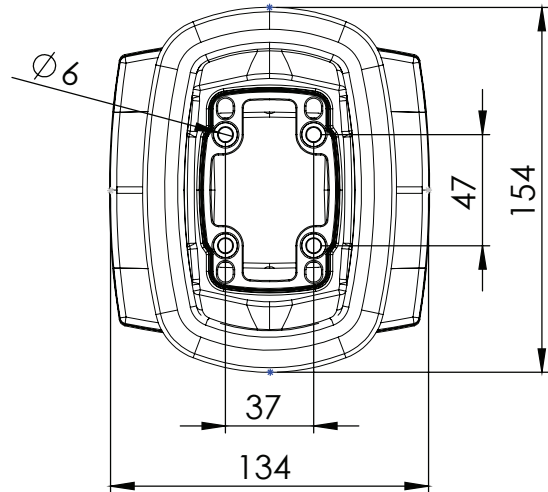


Weight	3300 gr
Color Ral No	RAL 7035 / Bellow RAL 7016
Package	1
Package Dimension	185x155x135 mm
Material	Steel Casting
Movement	Right 90° - Left 90°

XX-TA080

Support Arm Systems

XX-TA080.710

Rotatable Wall-Mounted Hinge
Vertical Outlet

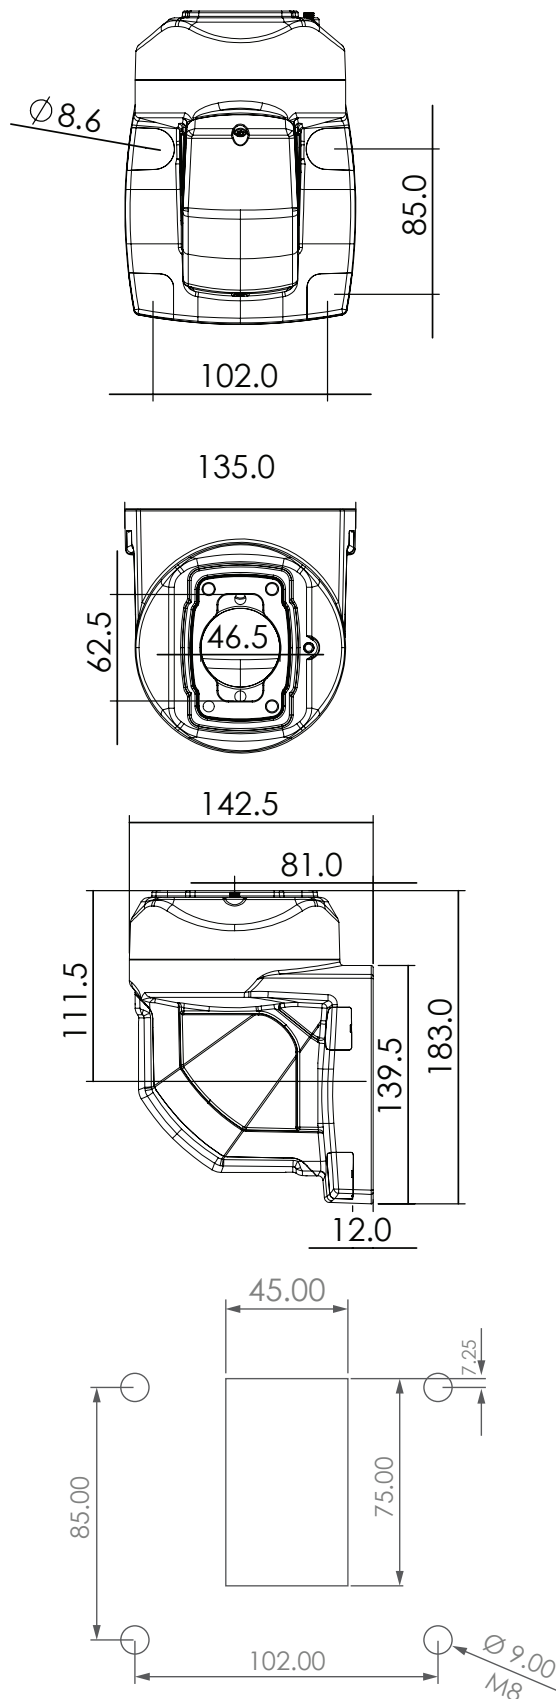

XX-TA80.710 Rotatable Wall-Mounted Hinge Vertical Outlet is designed to create a connection point to any preferred point vertically. It allows the operator arm to move at a 315° left and right for medium loads configurations.

Weight	2280 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	200x145x145 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA080

Support Arm Systems




Wall-Socket Mounting Bracket

XX-TA080.800



XX-TA080.800 Wall-Socket Mounting Bracket is a fixed connection that can be easily connected to vertical and horizontal surfaces. It is produced for medium loads configurations.

Weight	320 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	165x75x35 mm
Material	Aluminum
Movement	Fixed

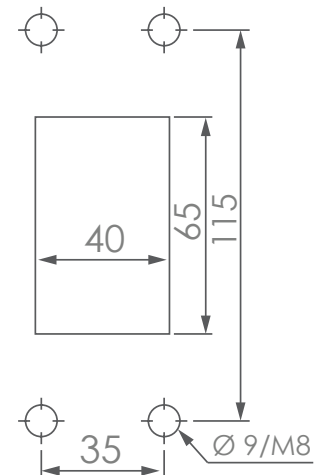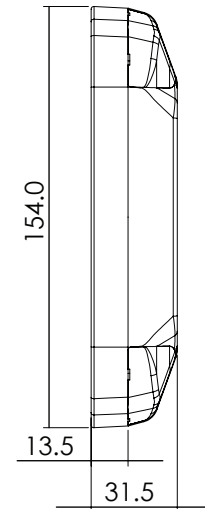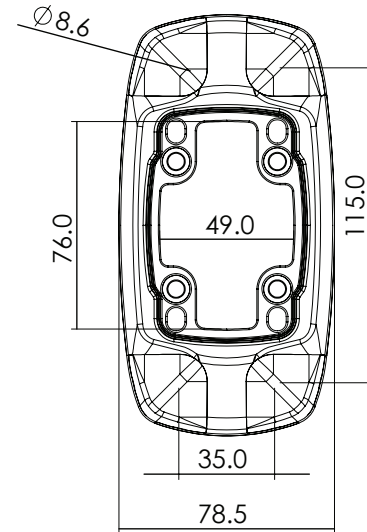


XX-TA080

Support Arm Systems


XX-TA080.810

Warning Lamp Cover (M22)

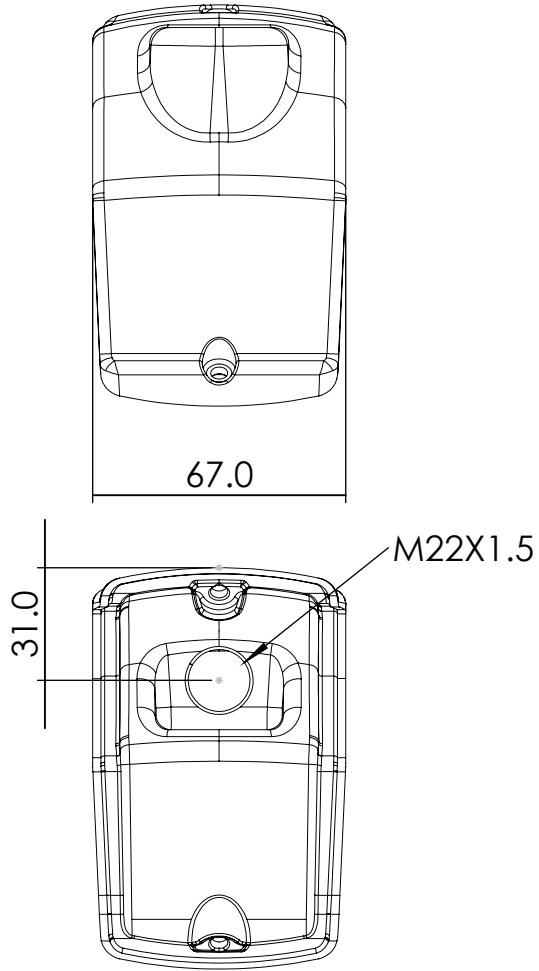

XX-TA080.810 Warning Lamp Cover (M22) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M22×1.5

* Warning lamp hole can be drilled with the desired size.

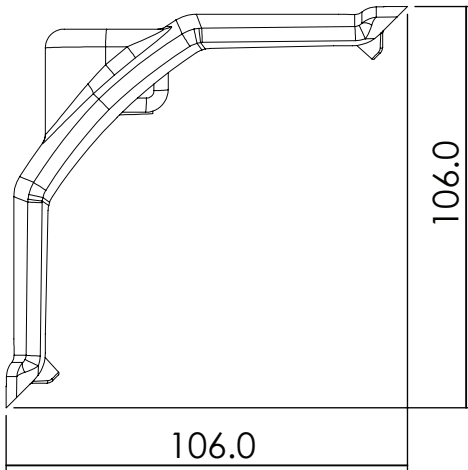

Weight	130 gr
Color Ral No	RAL 7016
Package	1
Package Dimension	145x50x70 mm
Material	Aluminum
Movement	Fixed

XX-TA080

Support Arm Systems

Warning Lamp Cover (M18)



XX-TA080.811



XX-TA080.811 Warning Lamp Cover (M18) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M18x1.5

* Warning lamp hole can be drilled with the desired size.

Weight	130 gr
Color Ral No	RAL 7016
Package	1
Package Dimension	145x50x70 mm
Material	Aluminum
Movement	Fixed

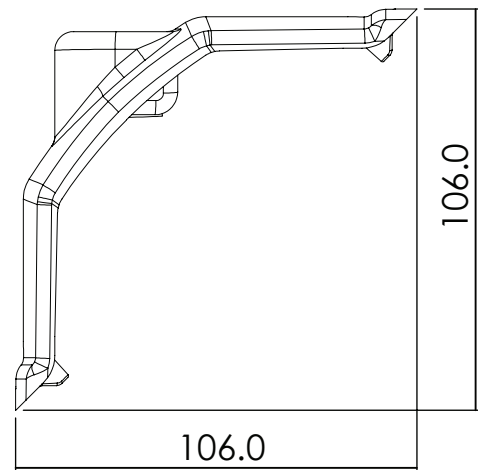
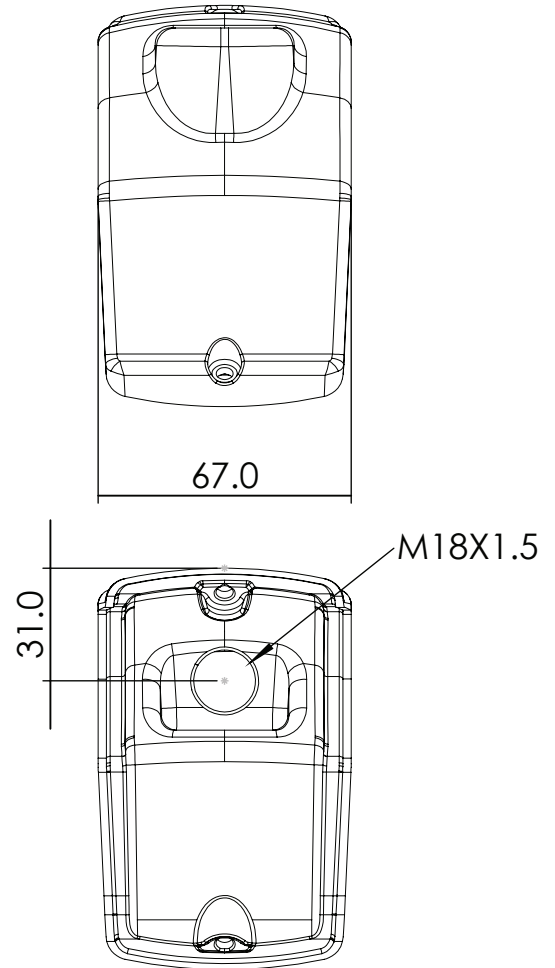


XX-TA080

Support Arm Systems

XX-TA080.820

080 / 050 Support Arm Adaptor

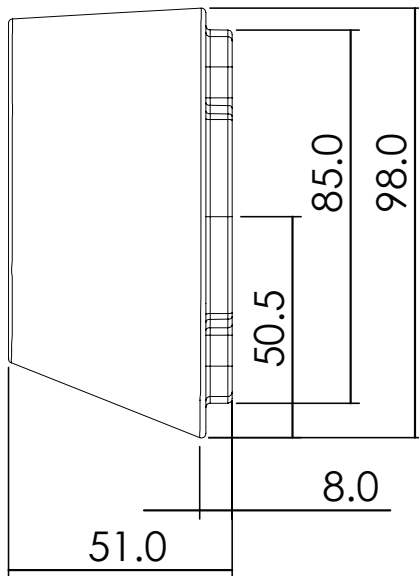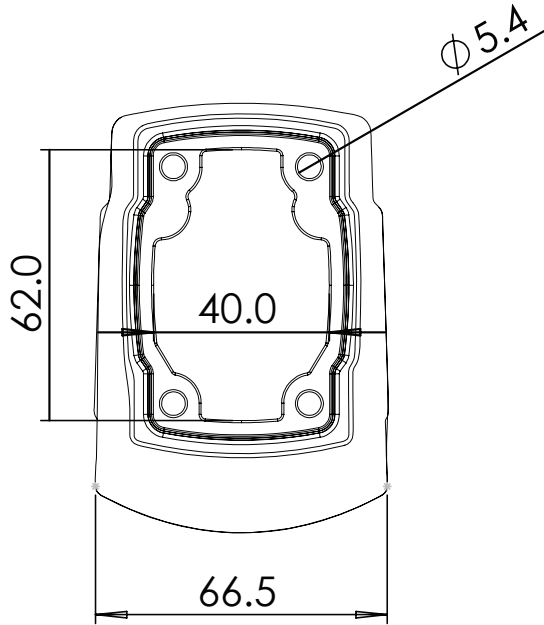

080/050 Support Arm Adaptor is used to secure the connection between XX-TA080 and XX-TA050. It is designed for configurations of heavy loads. The configurations with this product prevent vibrating and sagging as a result of heavy loads. This support arm adaptor can be used horizontally or vertically.

Weight	500 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Fixed

XX-TA080

Support Arm Systems




080/Ø48 Adaptor

XX-TA080.825



XINDUX XX-TA080.825 is an 080/Ø48 Adaptor produced in accordance with operator systems and industrial machines belonging to different sectors, it is designed to fit all profile models. With its waterproof module, you can connect tube profiles of different weights and lengths and mount them on durable surfaces.

Weight	1000 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	190x80x120 mm
Material	Aluminum
Movement	Fixed

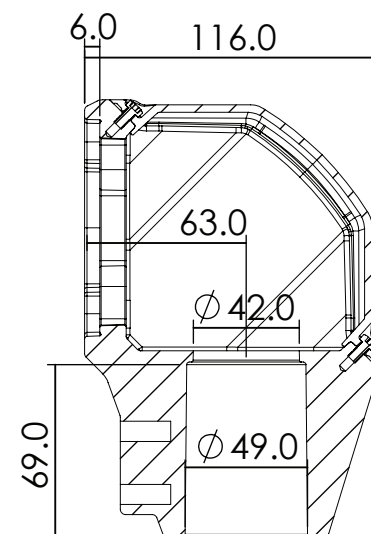
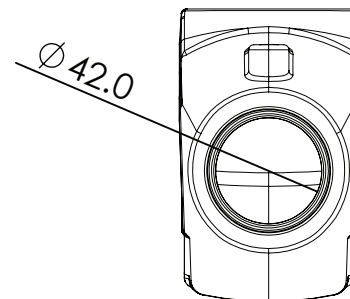
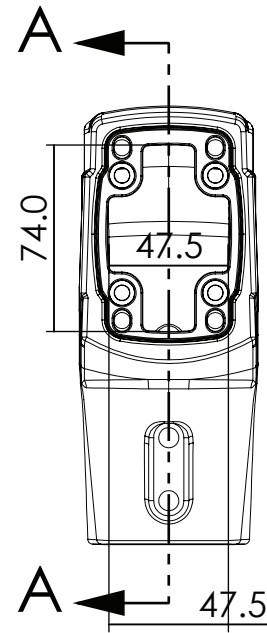


XX-TA080

Support Arm Systems

XX-TA080.826

Ø48 Adaptor

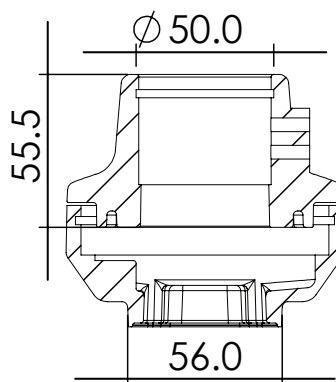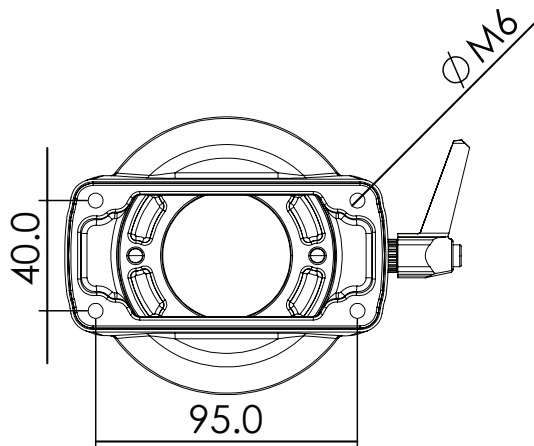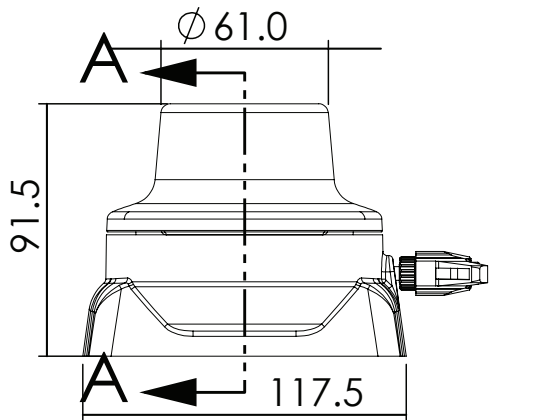

XX-TA080.826 Ø48 adaptor has an ergonomic structure used to connect the operating panels to the mechanical system. You can adjust the rotation angle at the desired position with the switch lever located on the side surface of the module.


Weight	930 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	140x120x110 mm
Material	Aluminum
Movement	Rotatable 350°

XX-TA080


Support Arm Systems

Ø48 Pipe Profile

XX-TA080.827

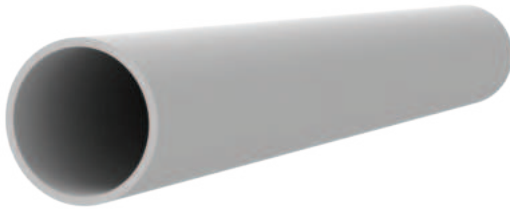

XX-TA080.827 Ø48 pipe profile is compatible with all kinds of mechanical tools. XINDUX expert team produced and developed this profile pipe with high standards.

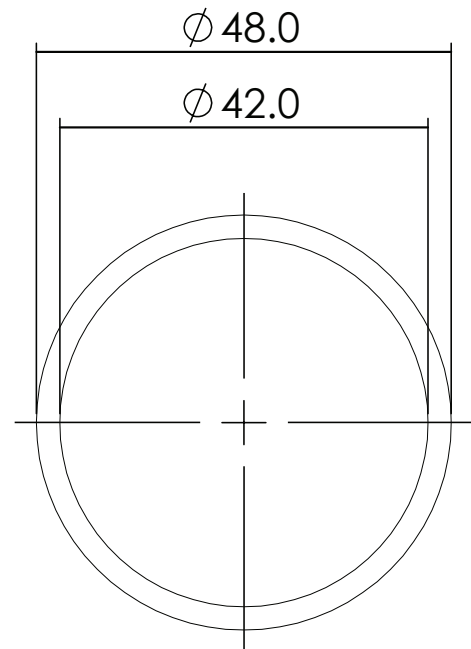


Weight	800 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	250x50x50 mm
Material	Aluminum

XX-TA080

Support Arm Systems

XX-TA080.830

Rotatable Panel Adaptor Vertical

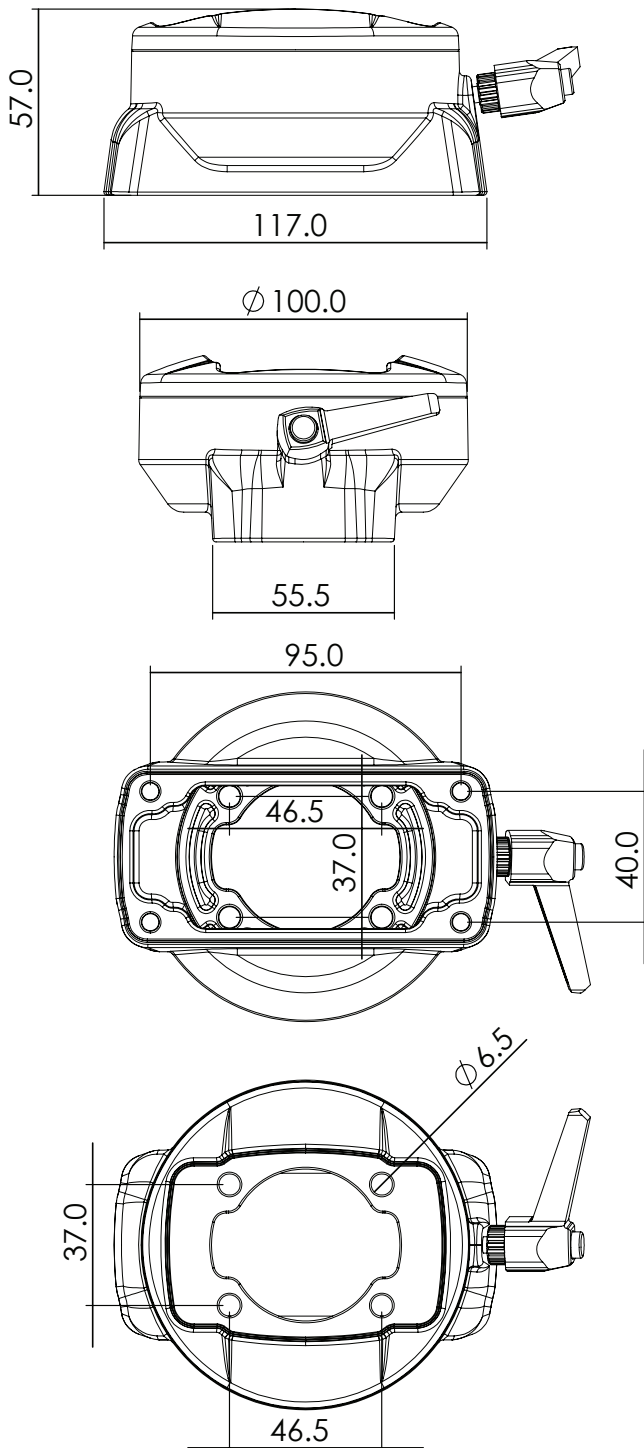

XX-TA080.830 Rotatable Panel Adaptor Vertical is the connector between the operator panel and the operator arm. The dimension of the adaptor surface is 118x65mm which allows a 315° smooth rotation to the left and right. This product is designed for medium loads and a suitable depth ratio.

Weight	930 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	140x120x110 mm
Material	Aluminum
Movement	Rotatable 350°

XX-TA080



Support Arm Systems

10° Angle Piece

XX-TA080.831



An angle of 10 degrees has been applied to XX-TA080.831, which is produced in full compliance with the connection points of the parts to be mounted on industrial panels. Bolt connection holes and cable passage feature have been developed to ensure the connection between the panel and the modu

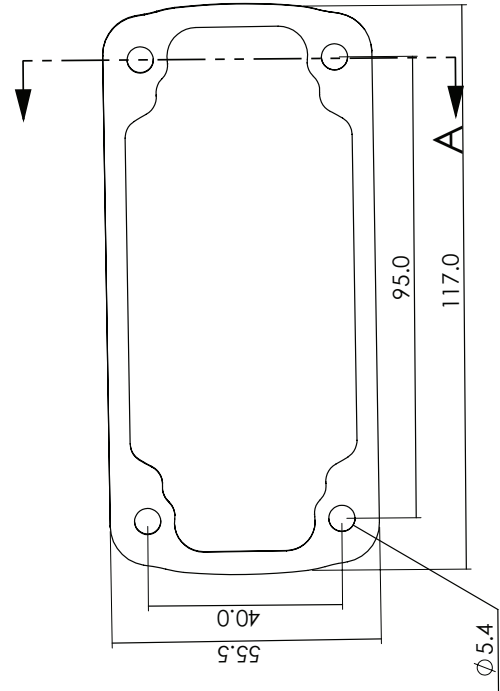


Weight	190 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	170x35x80 mm
Material	Aluminum
Movement	Fixed

XX-TA080

Support Arm Systems

XX-TA080.832

080 Panel Adaptor

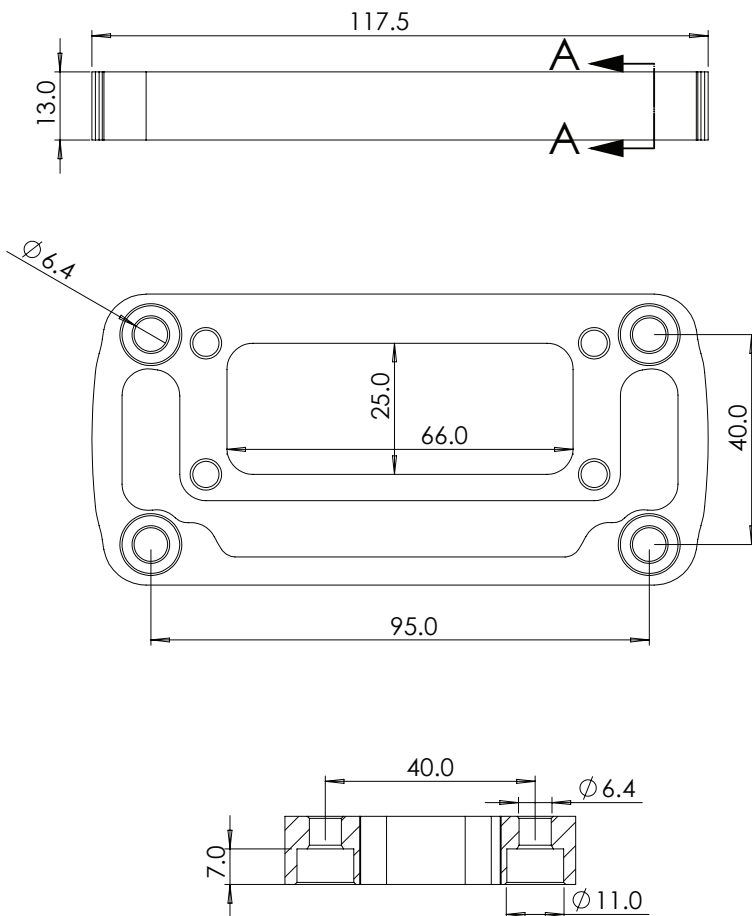

XX-TA080.832 adapter serves as a connection between the modules compatible with the carrier and the supporting systems of the machines, is the essential element to optimize the functioning of the panels and mechanical equipment. It has a convenient and practical structure by the connection and the holes on the adapter.


Weight	235 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	170x40x80 mm
Material	Aluminum
Movement	Fixed

XX-TA080



Support Arm Systems

Ø134 mm Panel Adaptor

XX-TA080.833

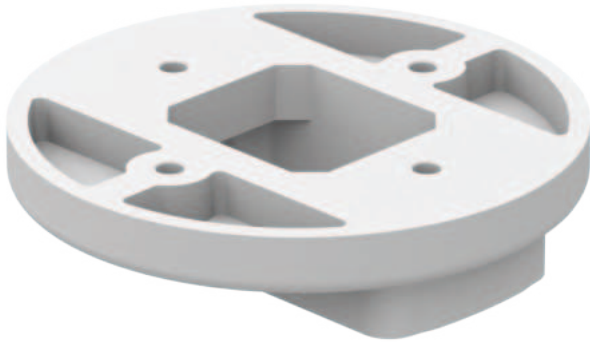

XX-TA080.833 Ø134mm Panel Adaptor is used for different dimensions between modules providing a practical and important element between connection modules and panel connection.

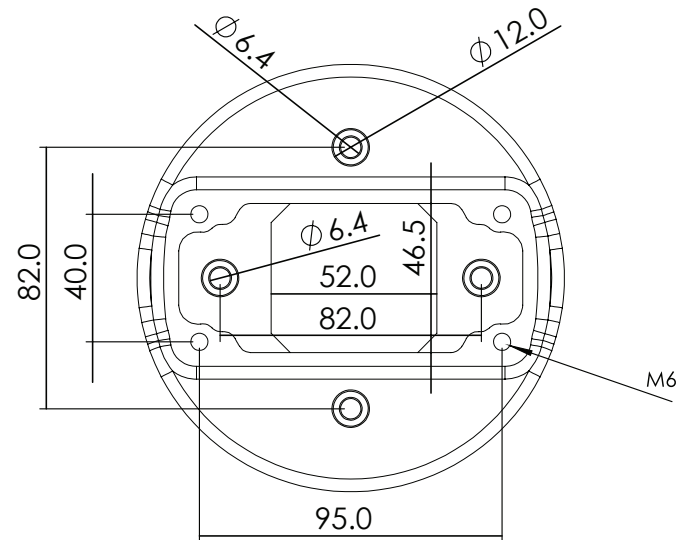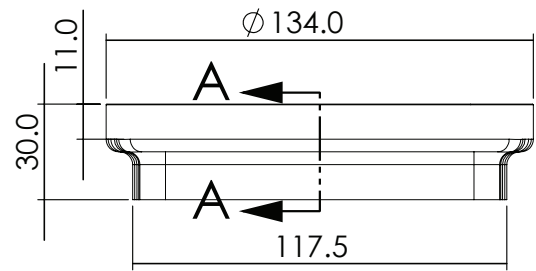


Weight	700 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	135x45x130 mm
Material	Aluminum
Movement	Fixed
Diameter	Ø134 mm

XX-TA080

Support Arm Systems

XX-TA080.834

Ø134 mm 10° Panel Adaptor

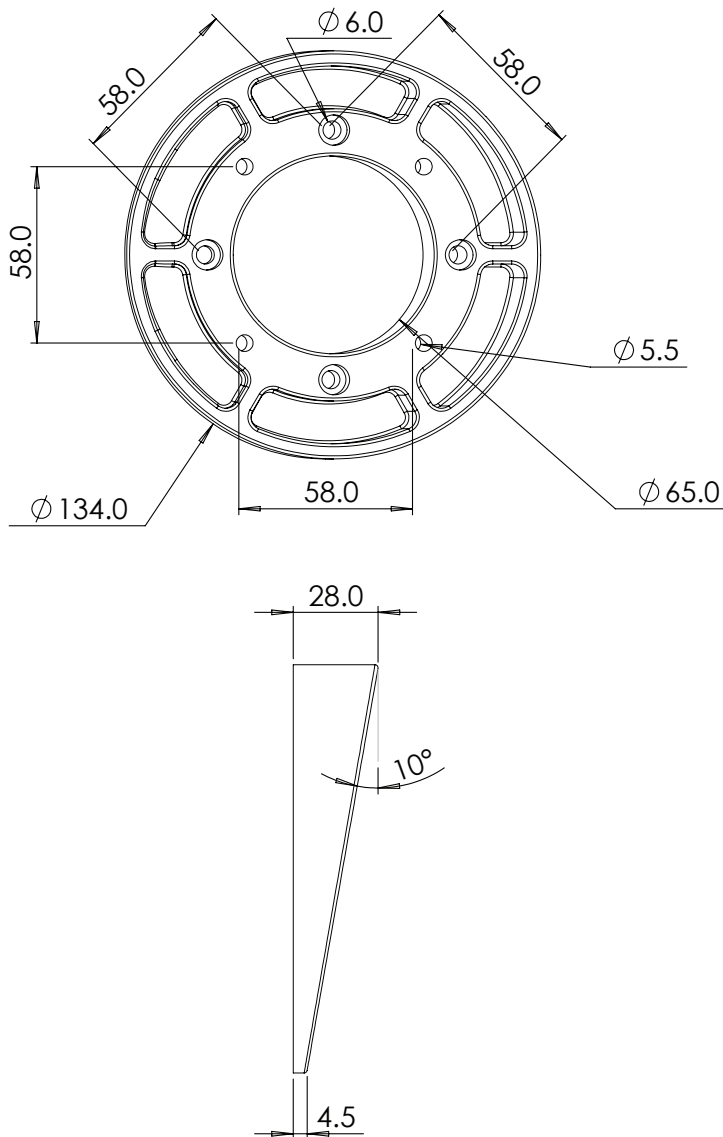

XX-TA080.833 Ø134mm Panel Adaptor is used for different dimensions between modules providing a practical and important element between connection modules and panel connection. This module has connection points that will facilitate its assembly to the panel to be used.

Weight	380 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	135x45x130 mm
Material	Aluminum
Movement	Fixed
Diameter	Ø134 mm

XX-TA080




Support Arm Systems

Panel Tilting Adaptor

XX-TA080.835



The flexible structure of XX-TA080.835 is among the technical support elements produced for industrial panels to provide maximum performance in a compact form. This module is provided with a bellows that can move up and down. There are bolt connection holes and cable passage holes opened on the module for a perfect assembly.

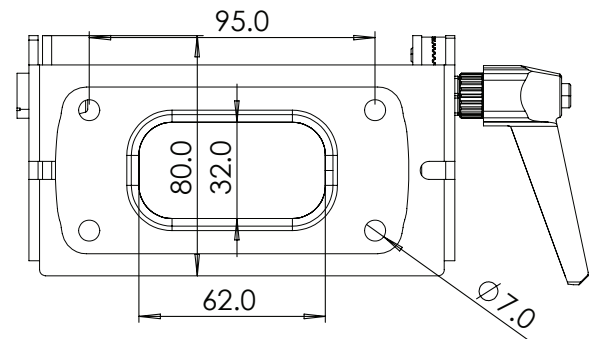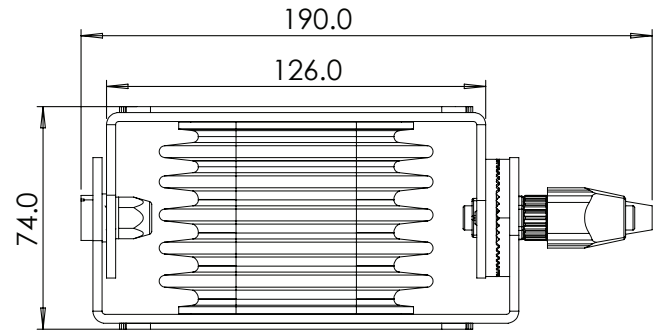


Weight	750 gr
Color Ral No	RAL 7035 (Bellow RAL 7016)
Package	1
Package Dimension	195x90x95 mm
Material	Sheet Steel
Movement	+30° / - 40°

XX-TA080

Support Arm Systems

XX-TA080.836

Vesa Panel Tilting Adaptor Moving

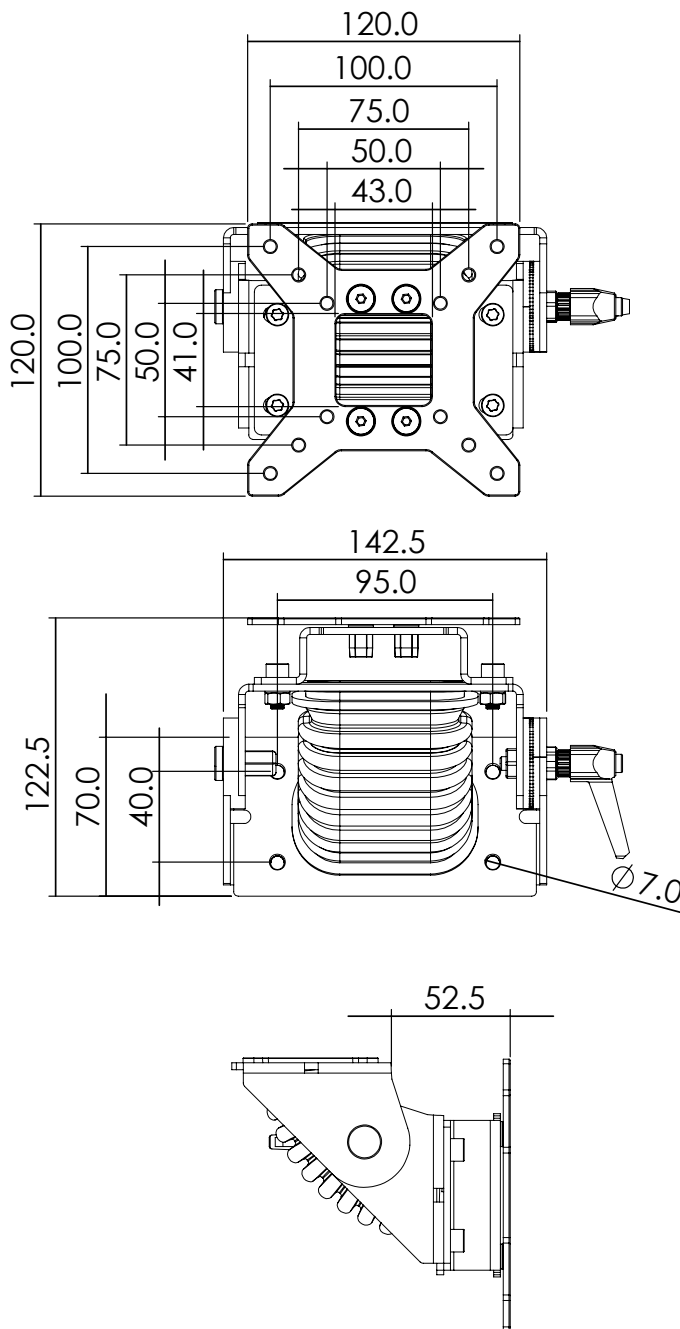

XX-TA080.836 Vesa connection module is one of the improved and newest version of support and connection equipment. It is produced with high standards by professional Xindux teams. The maximum mobility of the bellows, which is installed in this module connects all equipment at every angle.



Weight	1200 gr
Color Ral No	RAL 7035 (Bellow RAL 7016)
Package	1
Package Dimension	180x110x150 mm
Material	Sheet Steel
Movement	+30° / -40°

XX-TA080


Support Arm Systems

Ø130 mm Panel Tilting Adaptor - With Bellows

XX-TA080.840

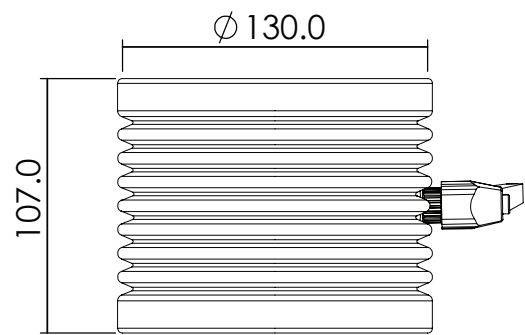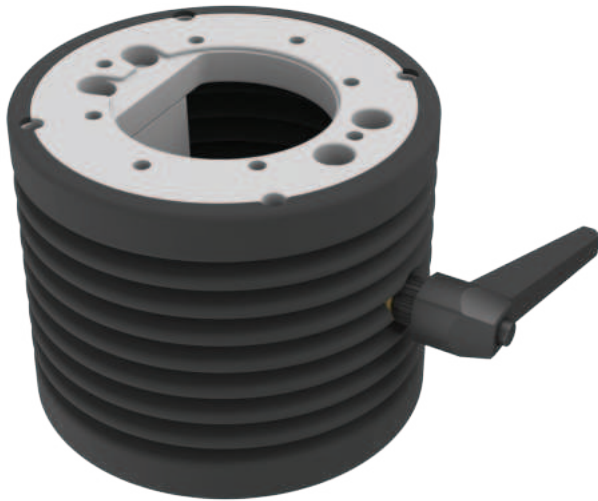

Ø130 mm Panel Tilting Adaptor - With Bellows has been developed using high quality material, it is made of movable parts and is intended to be compatible with panels of different types and models. The module stands out with its up and down mobility and sealing feature.

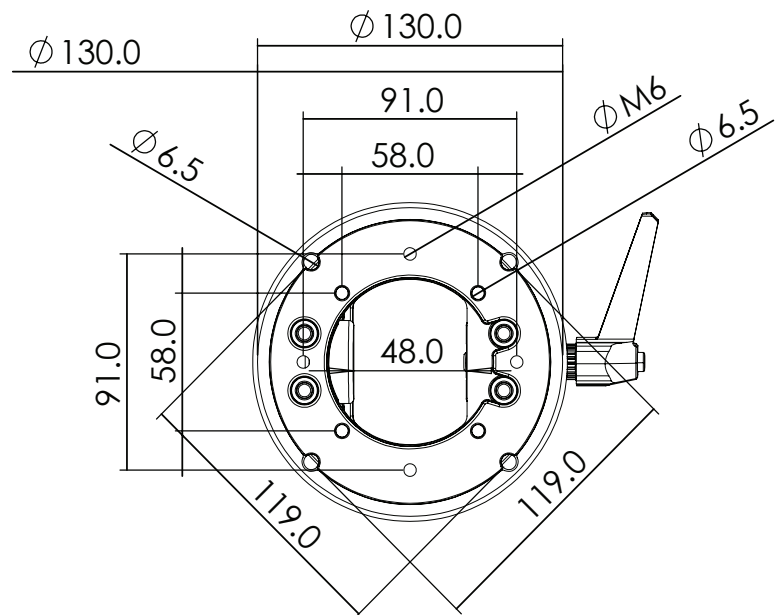


Weight	1150 gr
Color Ral No	RAL 7035 (Bellow RAL 7016)
Package	1
Package Dimension	140x155x110 mm
Material	Aluminum
Movement	+30° / - 40°

XX-TA080

Support Arm Systems

XX-TA080.550

Rotatable Panel 90° Angle Coupling

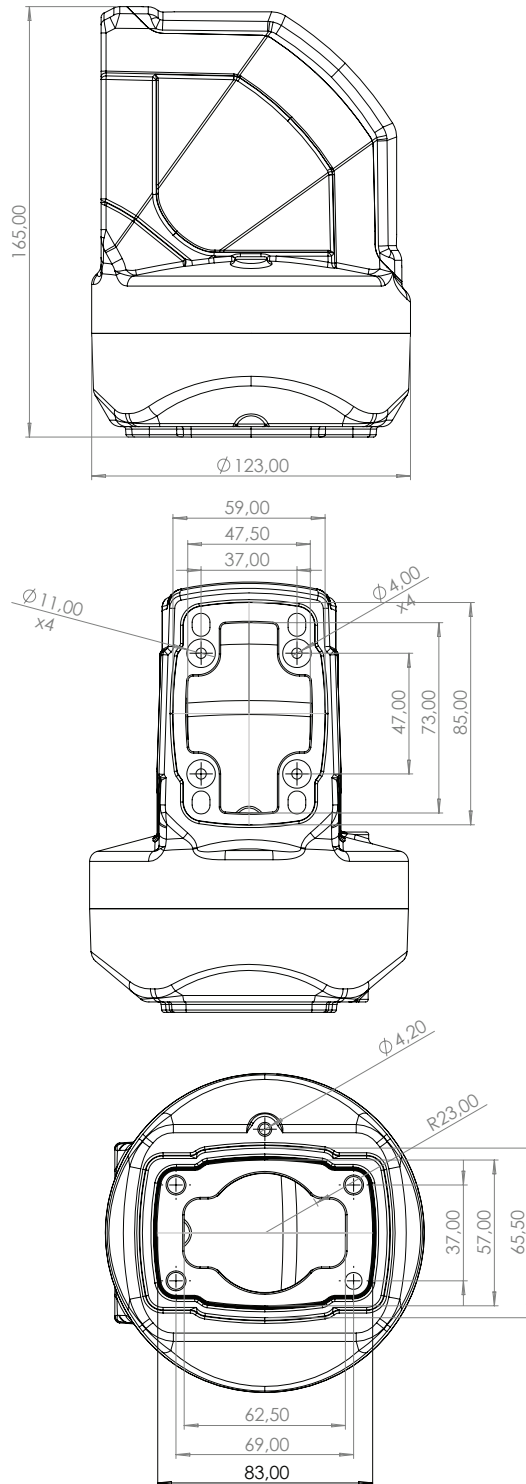

XX-TA080.550 Rotatable Panel 90° Angle Coupling is suitable for an operator panel that requires positioning directly after a 90° angle corner turn. Max. diameter is 123mm and the rotation angle is 315° in total. The ability to rotate around itself provides flexibility for the operator using the panel in bringing it to a desired position. XX-TA080.550 is an ideal product that will be used for the panel types with more depth.

Weight	1780 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø123 mm

XX-TA080

SUPPORT ARM SYSTEMS

XX-TA130




XX-TA130

1	XX-TA130 PROFILE	Support Arm Profile
2	XX-TA130.310	Panel Coupling
3	XX-TA130.320	Rotatable Panel Coupling
4	XX-TA130.400	Rotatable Panel 90°Angle Coupling
5	XX-TA130.420	90° Angle Piece
6	XX-TA130.500	Rotatable Intermediate Hinge
7	XX-TA130.505	Steel Interconnection Module - With Bellows
8	XX-TA130.600	Rotatable Top Mounted 90° Angle Joint
9	XX-TA130.610	Rotatable Top Mounted Vertical Outlet
10	XX-TA130.700	Rotatable Wall-Mounted Hinge Horizontal Outlet
11	XX-TA130.705	Steel Wall Mounted Module - With Bellows
12	XX-TA130.710	Rotatable Wall-Mounted Hinge Vertical Outlet
13	XX-TA130.800	Wall-Socket Mounting Bracket
14	XX-TA130.810	Warning Lamp Cover (M22)
15	XX-TA130.811	Warning Lamp Cover (M18)
16	XX-TA130.820	130/080 Support Arm Adaptor
17	XX-TA130.840	Ø130 mm Panel Tilting Adaptor - With Bellows
18	XX-TA080 PROFILE	Support Arm Profile
19	XX-TA080.320	Rotatable Panel Coupling
20	XX-TA150 PANEL	PRO150 Enclosure Panel

Support Arm Systems

Support Arm Profile

XX-TA130.025

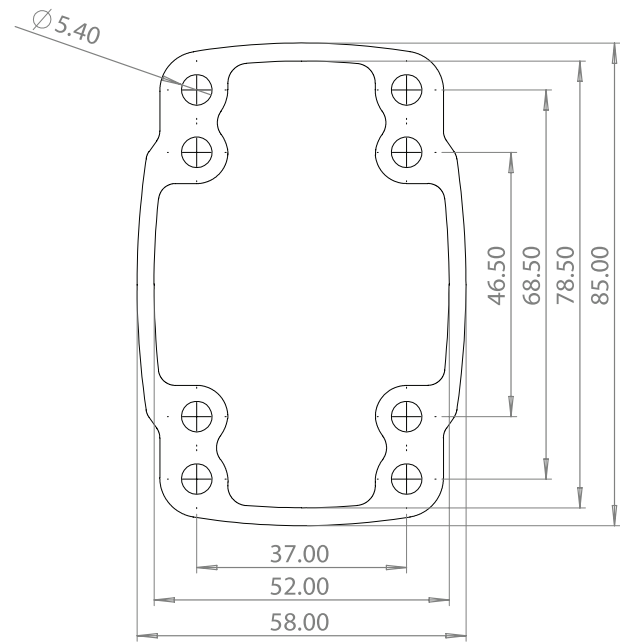

XX-TA.130 Operator Arm Systems determines the working and movement area of the XX-TA series.

It is produced for big-sized control panels with heavy loads and large dimensions. This product, with its high and modern structural durability is designed with advanced technology and works with other modules at high efficiency, bringing the operator arm to the fore. This operator arm can be produced in any requested length. The load capacity of a 1m long operator arm is up to 130kg. RAL 7035 light gray paint is used for this module with sealing feature.




Model No	Description	Length (mm)	Weight (mm)	Ral Code	Package Dimension
XX-TA130.025	130 Support Profile - 250mm	250	1625	7035	80 x 130 x 260
XX-TA130.050	130 Support Profile - 500mm	500	3250	7035	80 x 130 x 510
XX-TA130.075	130 Support Profile - 750mm	750	4875	7035	80 x 130 x 760
XX-TA130.100	130 Support Profile - 1000mm	1000	6500	7035	80 x 130 x 1010
XX-TA130.125	130 Support Profile - 1250mm	1250	8125	7035	80 x 130 x 1260
XX-TA130.150	130 Support Profile - 1500mm	1500	9750	7035	80 x 130 x 1510
XX-TA130.175	130 Support Profile - 1750mm	1750	11375	7035	80 x 130 x 1760
XX-TA130.200	130 Support Profile - 2000mm	2000	13000	7035	80 x 130 x 2010

XX-TA130

Support Arm Systems

XX-TA130.310

Panel Coupling

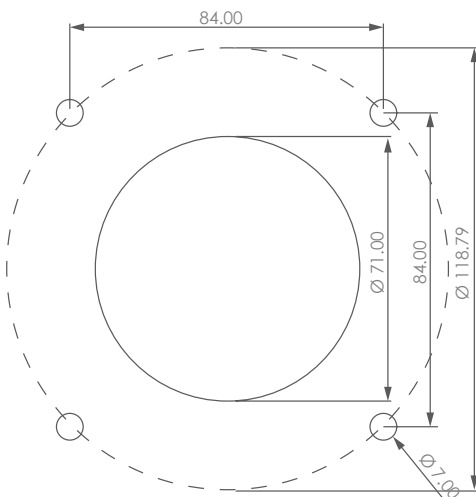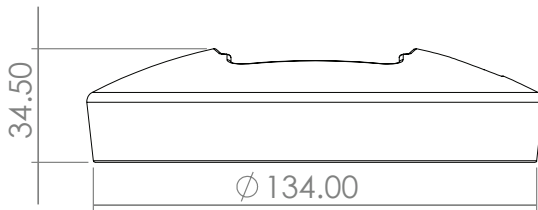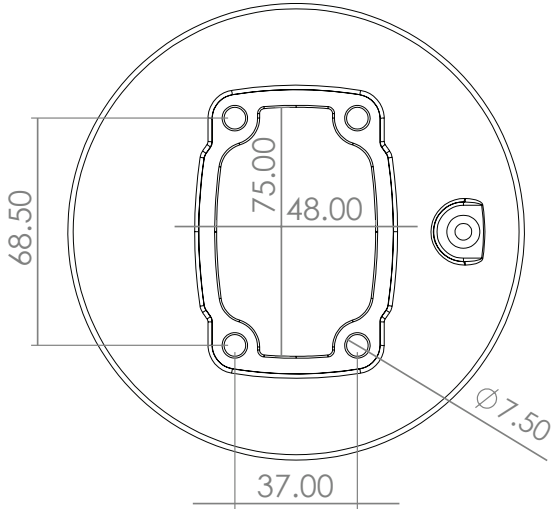

Ø134mm Panel Coupling provides the connection between the operator arm and the operator panel. XX-TA130.310 is a fixed module. The diameter is 130mm and produced for wide panels with depth.





Weight	480 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	135x40x135 mm
Material	Aluminum
Movement	Fixed
Diameter	Ø134 mm

XX-TA130

Support Arm Systems

Rotatable Panel Coupling

XX-TA130.320

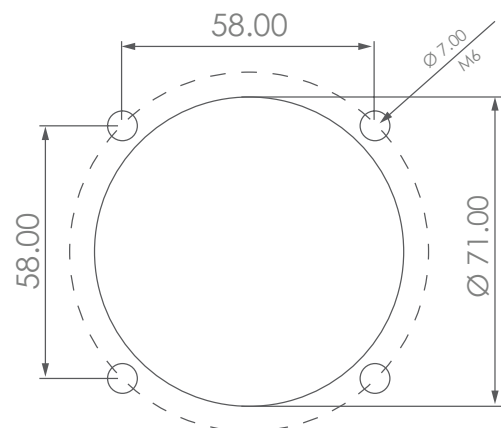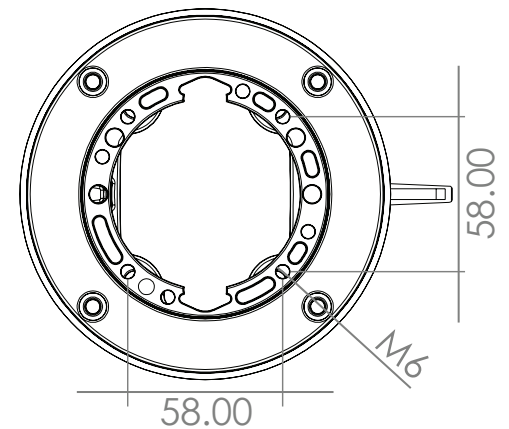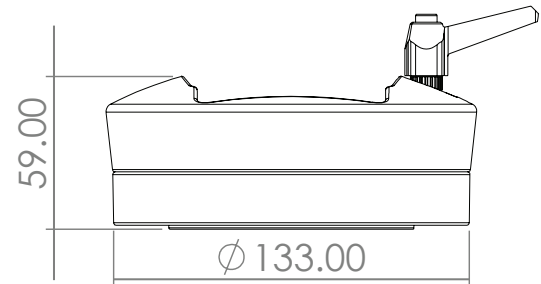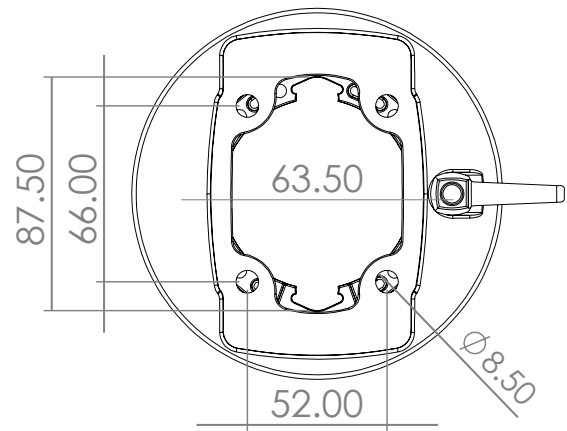

XX-TA130.320 Rotatable Panel Coupling provides the connection between the operator arm and the operator panel. The diameter is 133mm with a rotation capacity of 315° allowing the operator to rotate the panel to any desired position. It is produced for panel types with high depth ratio.


Weight	1300 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	150x60x145 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø133 mm

XX-TA130


Support Arm Systems

XX-TA130.400

Rotatable Panel 90° Angle Coupling

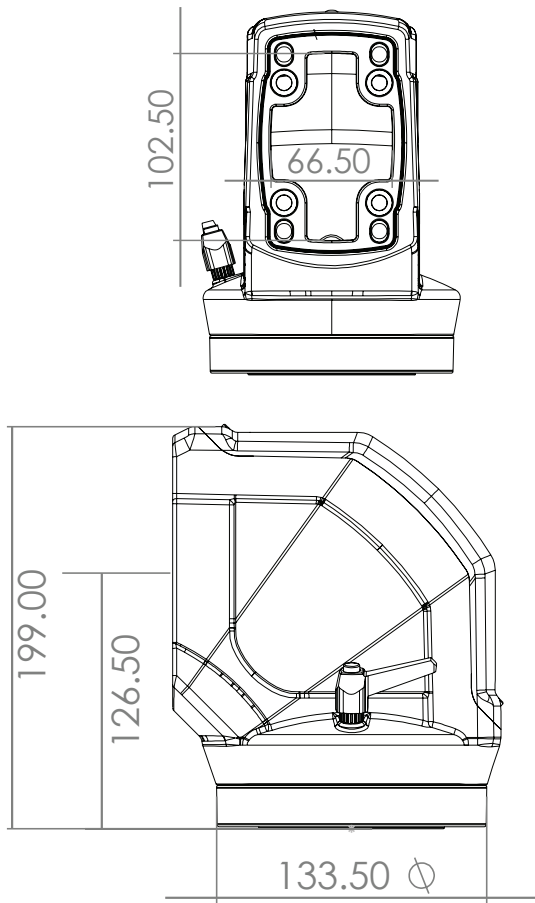

XX-TA130.400 Rotatable Panel 90° Angle Coupling is suitable for an operator panel that requires positioning directly after a 90° angle corner turn. The rotation angle is 315° in total. The ability to rotate around itself provides flexibility for the operator using the panel in bringing it to a desired position. XX-TA130.400 is an ideal product that will be used for the panel types with more depth.

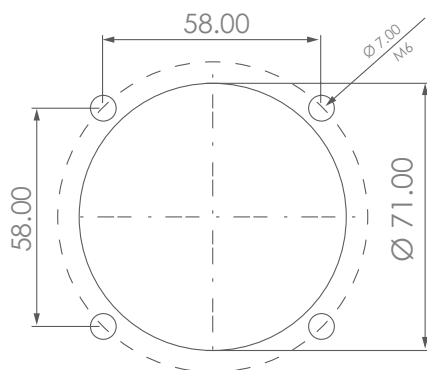



Weight	2400 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	220x150x170 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø133,5 mm

XX-TA130


Support Arm Systems

90° Angle Piece

XX-TA130.420

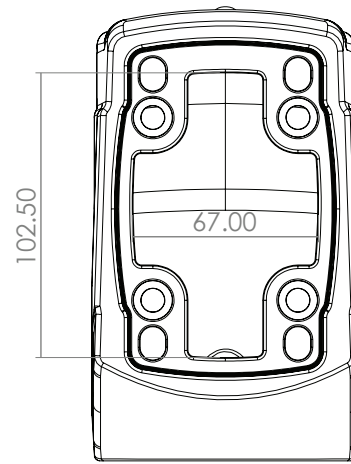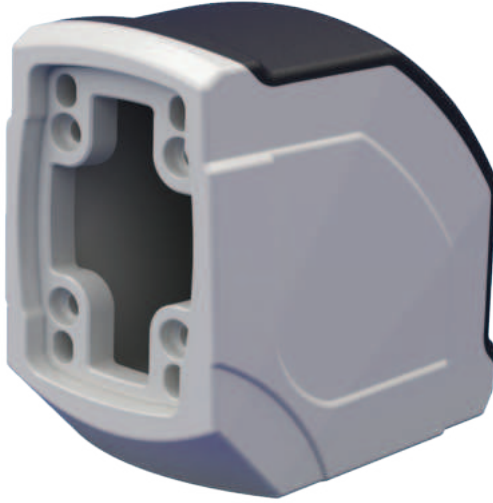

XX-TA130.420 90° Angle Piece is a fixed corner module that connects the operator arms in horizontal and vertical axis. Based on the structural features and usage conditions, this product can be used for heavy loads panels positioned in long distance and without any compatibility issues.

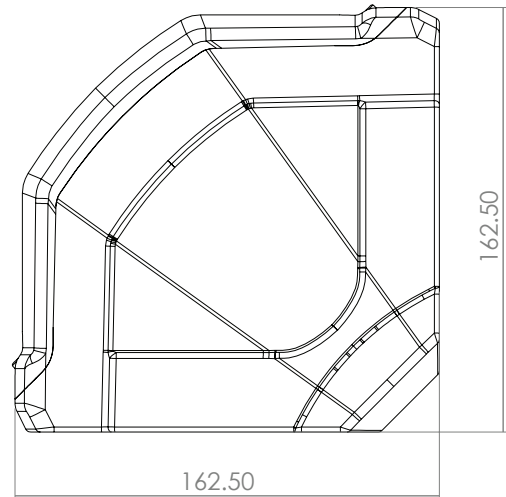


Weight	1650 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	170x100x160 mm
Material	Aluminum
Movement	Fixed

XX-TA130

Support Arm Systems

XX-TA130.500

Rotatable Intermediate Hinge

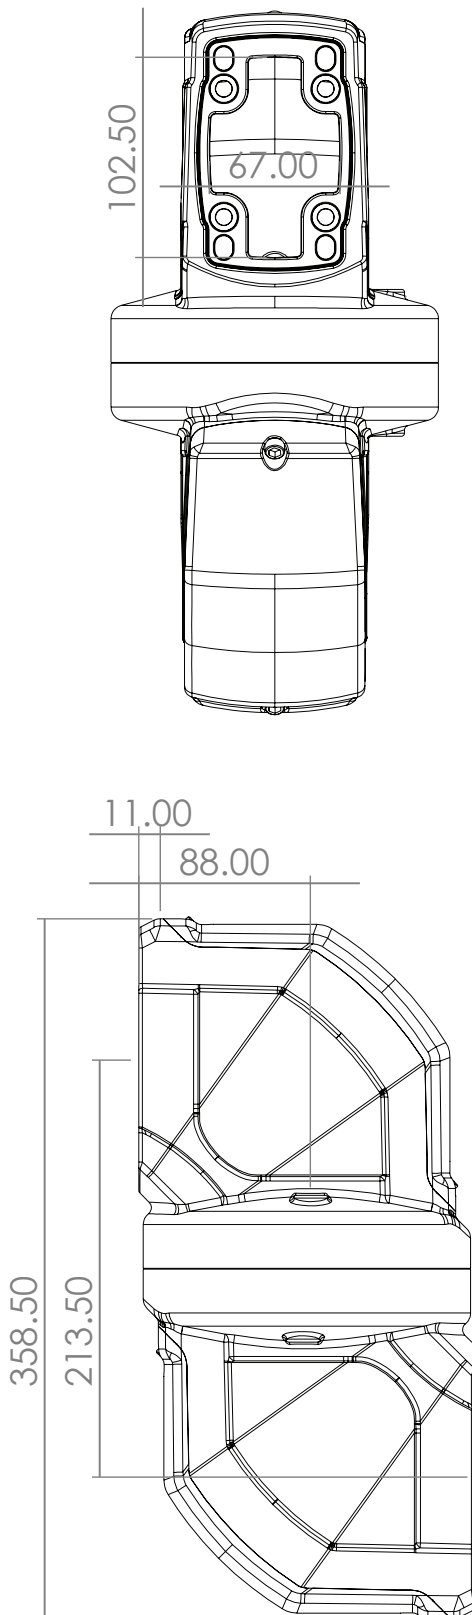

XX-TA130.500 Rotatable Intermediate Hinge module is used to ensure two operator arms on the horizontal axis are mounted on the assembly point and move at a semi-independent angle (315°) from each other. This product is an indispensable product for heavy loads and long length configurations in terms of structure and usage.

Weight	5700 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	355x180x175 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA130



Support Arm Systems

Steel Interconnection Module - With Bellows

XX-TA130.505



XX-TA130.505 Steel Interconnection Module - With Bellows is used to mount two operator arms to the connection points horizontally enabling them to move at 90° to the right or 90° to the left. The cast steel body of this product safely combines heavy and long arm configurations.




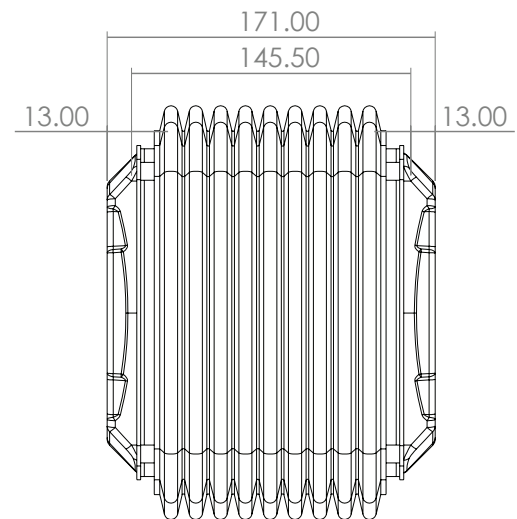
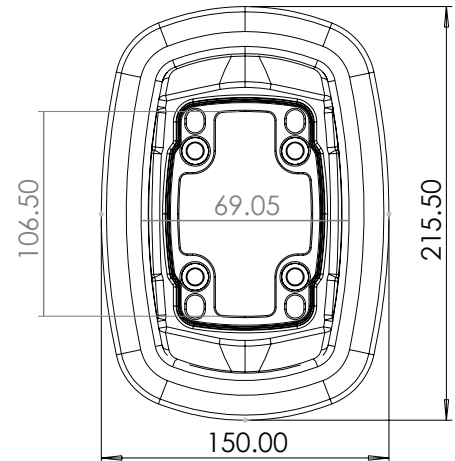


Weight	1000 gr
Color Ral No	RAL 7035 (Bellow RAL 7016)
Package	1
Package Dimension	245x180x160 mm
Material	Steel Casting
Movement	Right 90° / Left 90°

XX-TA130

Support Arm Systems

XX-TA130.600 Rotatable Top Mounted 90° Angle Joint

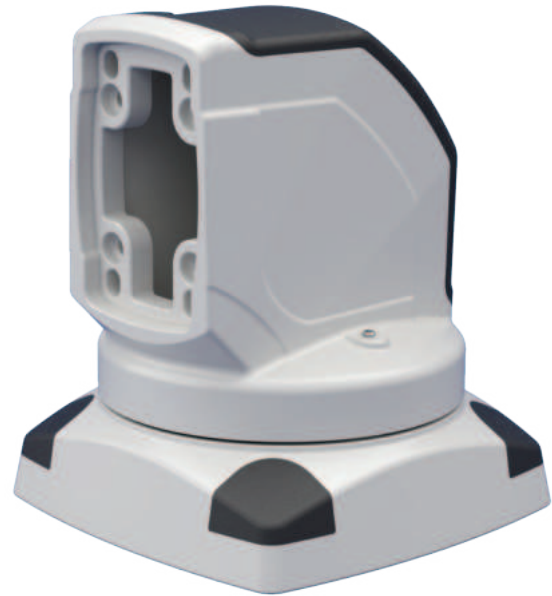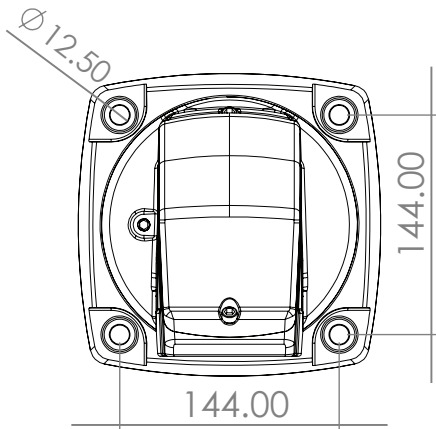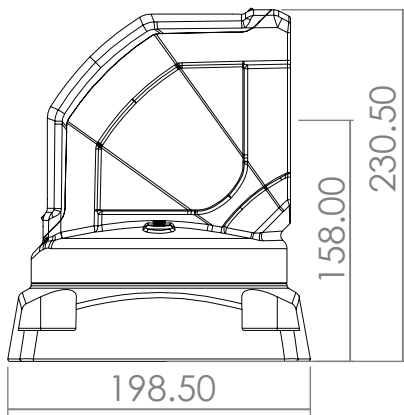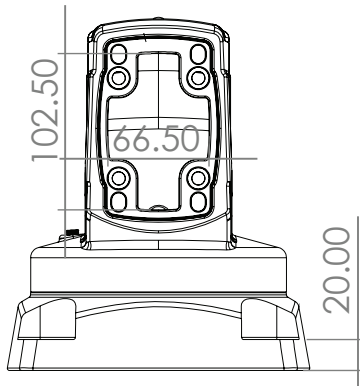

XX-TA130.600 Rotatable Top Mounted 90° Angle Joint is produced to provide a connection for a high position point. It allows a smooth rotation for the panel horizontally and provides a 315° movement mobility to the right or left. This product is designated for configurations with a heavy loads.

Weight	5900 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	210x240x220 mm
Material	Aluminum
Movement	Rotatable 315°



Support Arm Systems

Rotatable Top Mounted Vertical Outlet


XX-TA130.610



XX-TA130.610 Rotatable Top Mounted Vertical Outlet provides a 315° rotation movement to the right and left. It is designated for heavy loads configurations and can also serve as a "Fixed Kiosk"

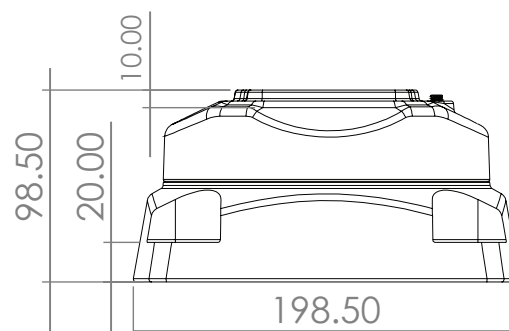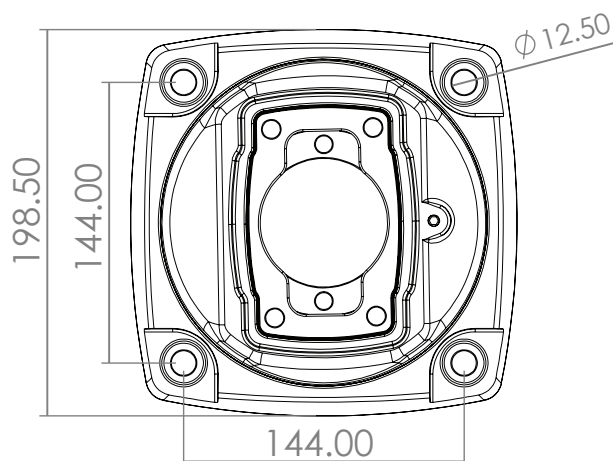

Weight	4800 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	220x125x205 mm
Material	Aluminum
Movement	Rotatable 315°

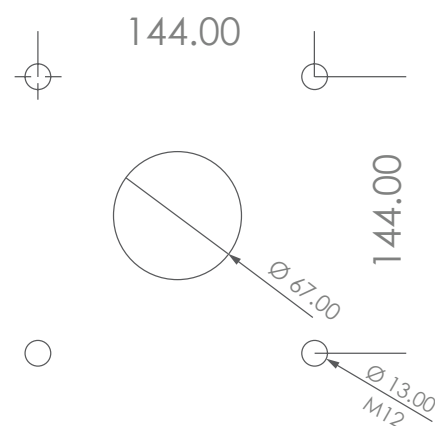


XX-TA130

Support Arm Systems

XX-TA130.700

Rotatable Wall-Mounted Hinge
Horizontal Outlet

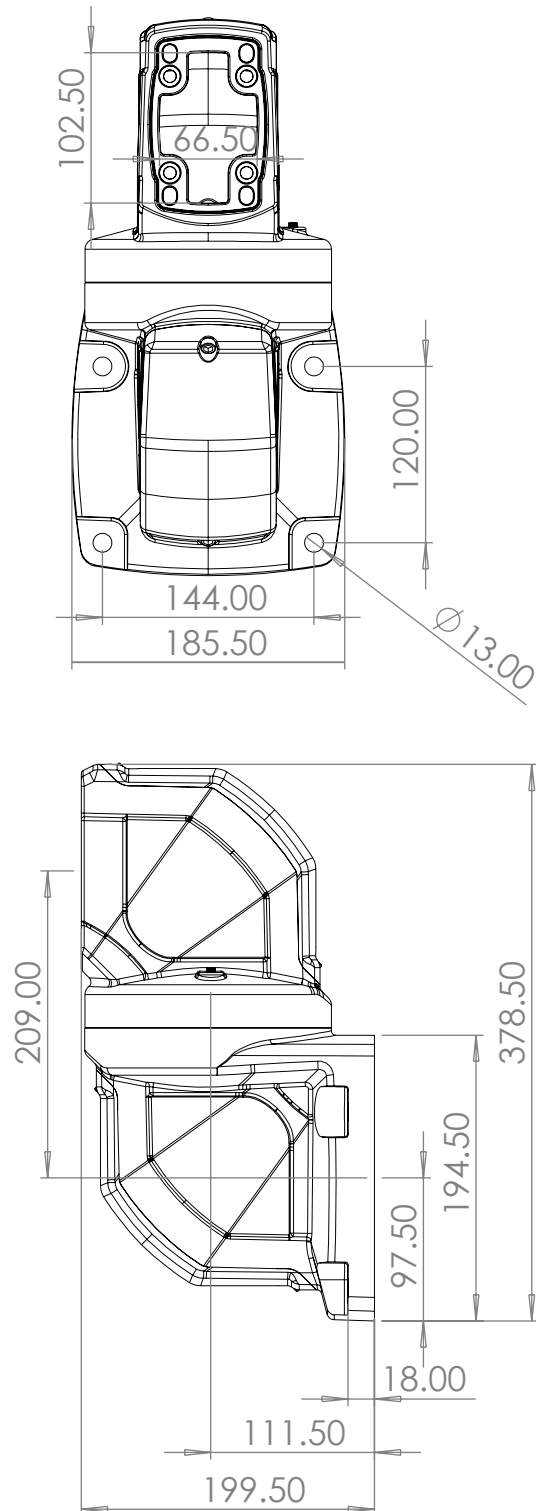

XX-TA130.700 Rotatable Wall-Mounted Hinge Horizontal Outlet is designed to create a connection point to any preferred point where it is unavailable on the ground. It allows the operator arm to move at a 315° left and right horizontally for heavy loads configurations.


Weight	6500 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	390x200x210 mm
Material	Aluminum
Movement	Rotatable 315°

XX-TA130


Support Arm Systems

Steel Wall Mounted Module - With Bellows

XX-TA130.705

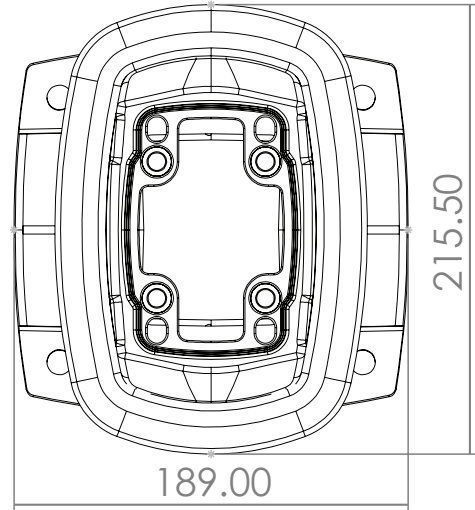

The Steel Wall-Mounted Module - With Bellows helps fixing the operator arms horizontally which are positioned on vertical surfaces. This product with its cast steel body gives reliability for heavy loads and long-distance arm configurations. It allows a mobility of 90° to the right and left.

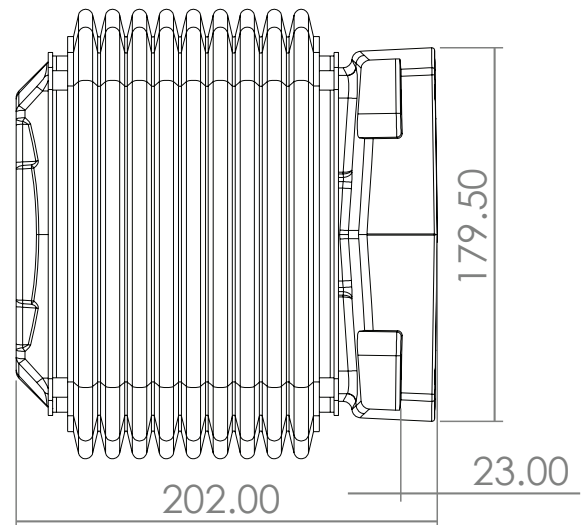




Weight	1000 gr
Color Ral No	RAL 7035 (Bellow RAL 7016)
Package	1
Package Dimension	250x220x290 mm
Material	Aluminum
Movement	Right 90° / Left 90°

XX-TA130

Support Arm Systems

XX-TA130.710

Rotatable Wall-Mounted Hinge Vertical Outlet

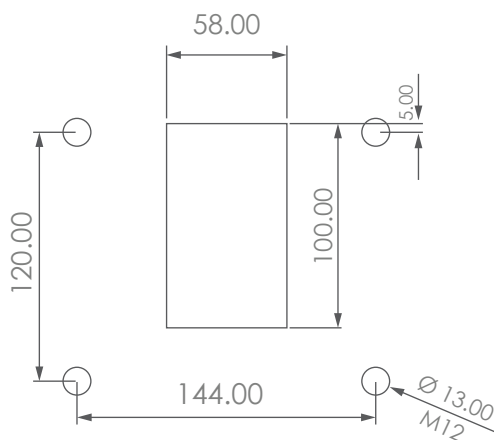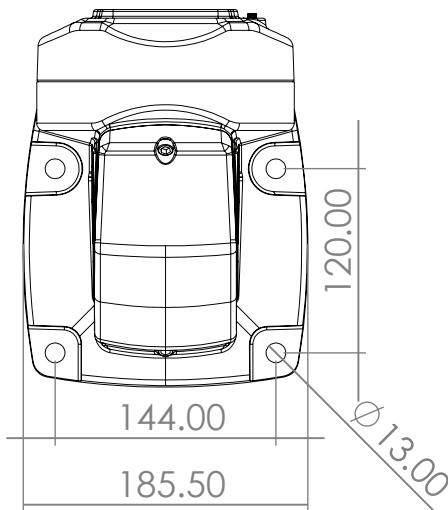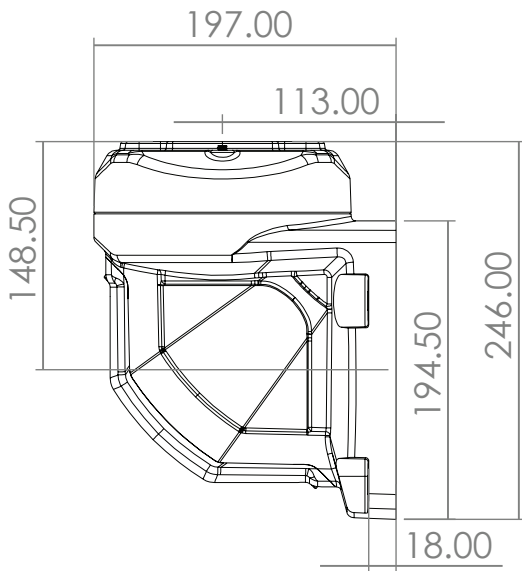

XX-TA130.710 Rotatable Wall-Mounted Hinge Vertical Outlet is designed to create a connection point to any preferred point vertically. It allows the operator arm to move at a 315° left and right for heavy loads configurations.

Weight	5750 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	280x200x210 mm
Material	Aluminum
Movement	Rotatable 315°



Support Arm Systems

Wall-Socket Mounting Bracket


XX-TA130.800



XX-TA130.800 Wall-Socket Mounting Bracket is a fixed connection that can be easily connected to vertical and horizontal surfaces. It is produced for heavy loads configurations.

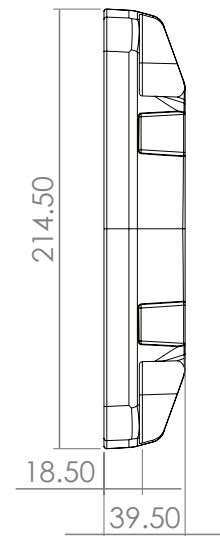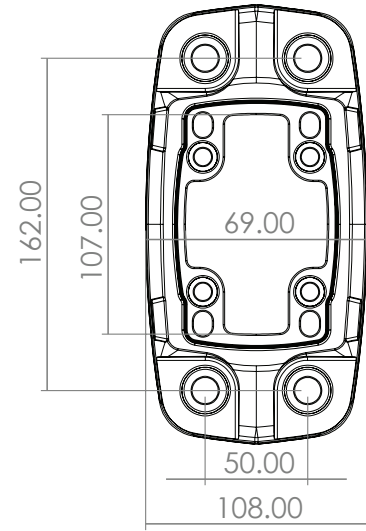

Weight	1000 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	220x50x110 mm
Material	Aluminum
Movement	Fixed



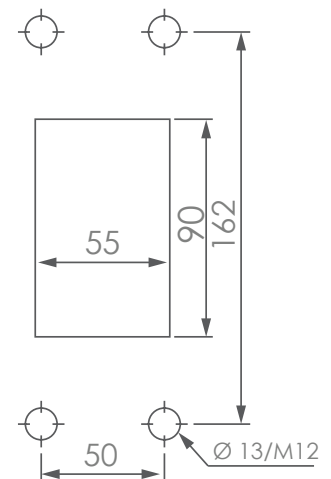


XX-TA130

Support Arm Systems

XX-TA130.810

Warning Lamp Cover (M22)

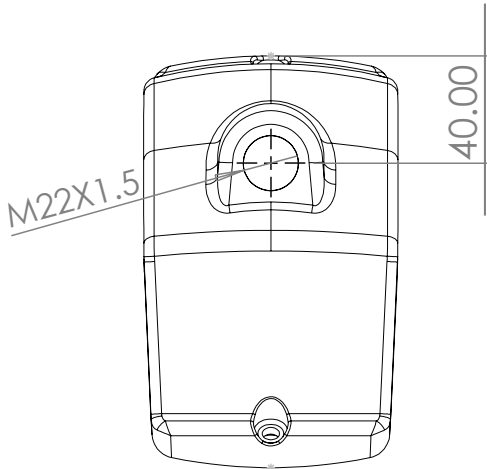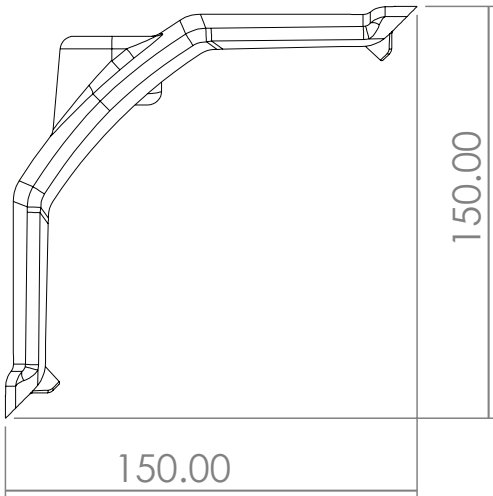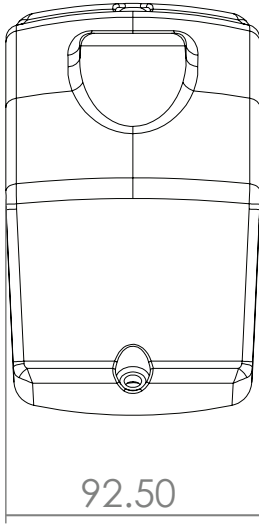

XX-TA130.810 Warning Lamp Cover (M22) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M22×1.5

Weight	290 gr
Color Ral No	RAL 7016
Package	1
Package Dimension	200x55x100 mm
Material	Aluminum
Movement	Fixed M22

XX-TA130

Support Arm Systems




Warning Lamp Cover (M18)

XX-TA130.811



XX-TA130.811 Warning Lamp Cover (M18) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M18×1.5

Weight	290 gr
Color Ral No	RAL 7016
Package	1
Package Dimension	200x55x100 mm
Material	Aluminum
Movement	Fixed M18

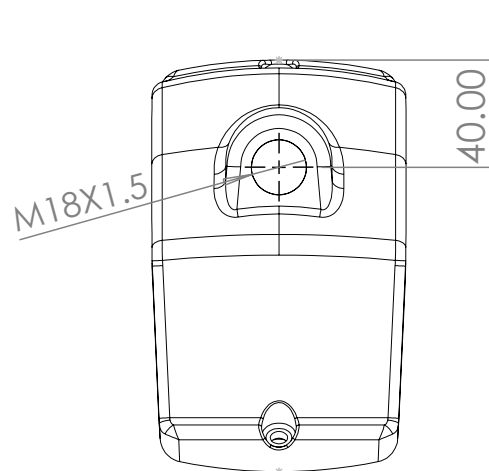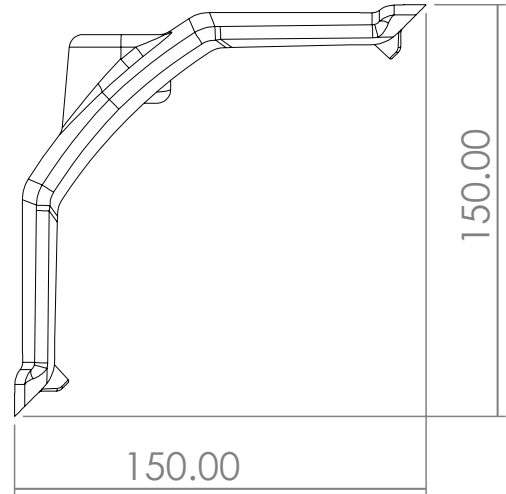
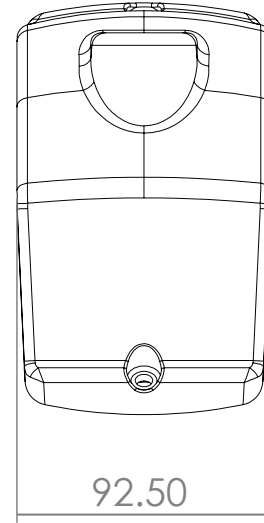


XX-TA130

Support Arm Systems

XX-TA130.820

130/080 Support Arm Adaptor

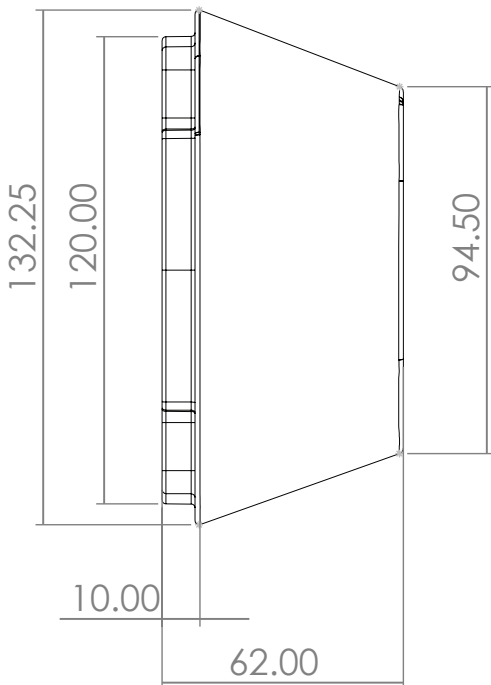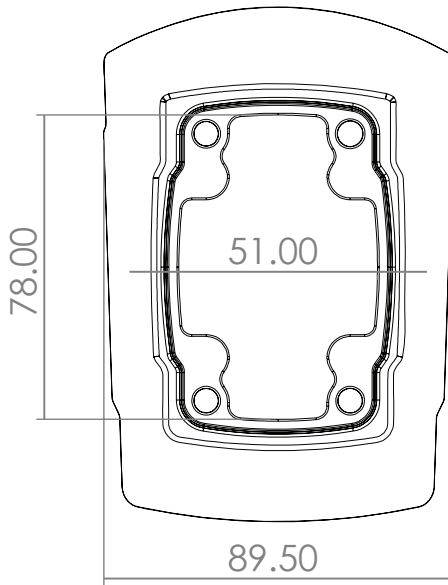

130/080 Support Arm Adaptor is used to secure the connection between XX-TA130 and XX-TA080. It is designed for configurations of heavy loads. The configurations with this product prevent vibrating and sagging as a result of heavy loads. This support Arm Adaptor can be used horizontally or vertically.

Weight	500 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	140x70x90 mm
Material	Aluminum
Movement	Fixed

XX-TA130

Support Arm Systems




Rotatable Panel 90° Angle Coupling

XX-TA130.550



XX-TA130.550 Rotatable Panel 90° Angle Coupling is suitable for an operator panel that requires positioning directly after a 90° angle corner turn. Max. diameter is 123mm and the rotation angle is 315° in total. The ability to rotate around itself provides flexibility for the operator using the panel in bringing it to a desired position. XX-TA130.550 is an ideal product that will be used for the panel types with more depth.

Weight	1780 gr
Color Ral No	RAL 7035 / Cover RAL 7016
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø123 mm

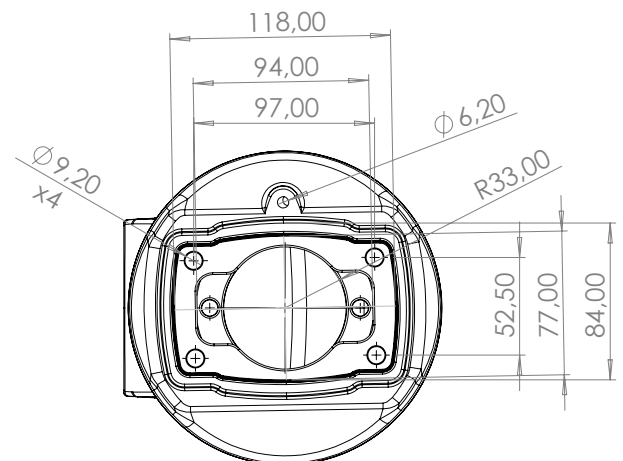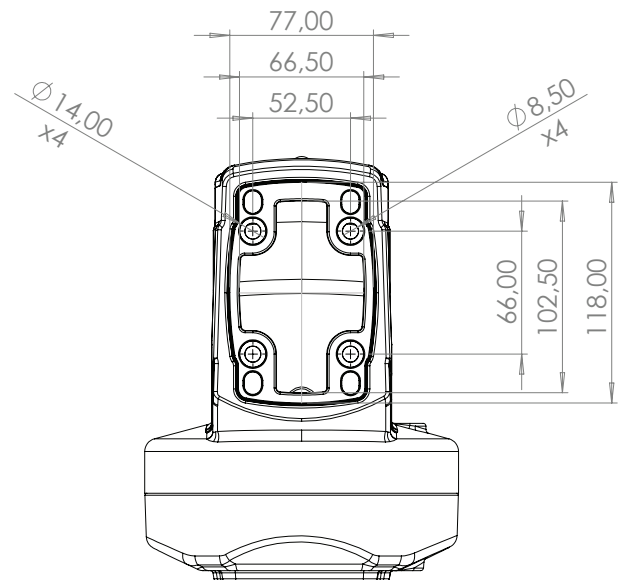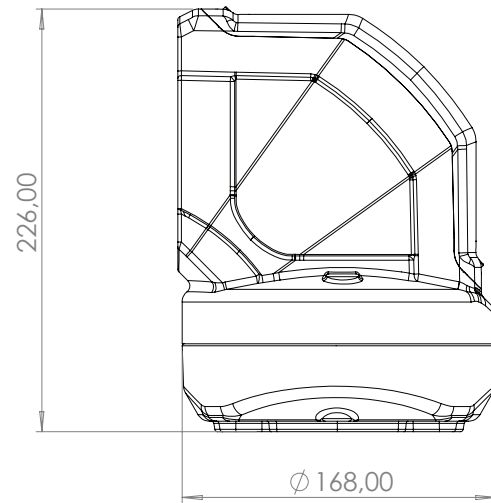

XX-TA130



PANEL ENCLOSURES



XX-PS 6000 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6000-2525	250	250	60	Yes	Yes	-	60	Yes
6000-2530	250	300	60	Yes	Yes	-	60	Yes
6000-3030	300	300	60	Yes	Yes	-	60	Yes
6000-3040	300	400	60	Yes	Yes	-	60	Yes
6000-4040	400	400	60	Yes	Yes	-	60	Yes
6000-4050	400	500	60	Yes	Yes	-	60	Yes
6000-5050	500	500	60	Yes	Yes	-	60	Yes
6000-5060	500	600	60	Yes	Yes	-	60	Yes
6000-6060	600	600	60	Yes	Yes	-	60	Yes

*Please contact with us for non-standart panel sizes

XX-PS 6001 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6001-2525	250	250	60	Yes	Yes	-	60	Yes
6001-2530	250	300	60	Yes	Yes	-	60	Yes
6001-3030	300	300	60	Yes	Yes	-	60	Yes
6001-3040	300	400	60	Yes	Yes	-	60	Yes
6001-4040	400	400	60	Yes	Yes	-	60	Yes
6001-4050	400	500	60	Yes	Yes	-	60	Yes
6001-5050	500	500	60	Yes	Yes	-	60	Yes
6001-5060	500	600	60	Yes	Yes	-	60	Yes
6001-6060	600	600	60	Yes	Yes	-	60	Yes

*Please contact with us for non-standart panel sizes

XX-PS 6002 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6002-2525	250	250	60	Yes	Yes	-	60	Yes
6002-2530	250	300	60	Yes	Yes	-	60	Yes
6002-3030	300	300	60	Yes	Yes	-	60	Yes
6002-3040	300	400	60	Yes	Yes	-	60	Yes
6002-4040	400	400	60	Yes	Yes	-	60	Yes
6002-4050	400	500	60	Yes	Yes	-	60	Yes
6002-5050	500	500	60	Yes	Yes	-	60	Yes
6002-5060	500	600	60	Yes	Yes	-	60	Yes
6002-6060	600	600	60	Yes	Yes	-	60	Yes

*Please contact with us for non-standart panel sizes



XX-PS 6001 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6001-2525 K	250	250	60	Yes	Yes	-	60	Yes
6001-2530 K	250	300	60	Yes	Yes	-	60	Yes
6001-3030 K	300	300	60	Yes	Yes	-	60	Yes
6001-3040 K	300	400	60	Yes	Yes	-	60	Yes
6001-4040 K	400	400	60	Yes	Yes	-	60	Yes
6001-4050 K	400	500	60	Yes	Yes	-	60	Yes
6001-5050 K	500	500	60	Yes	Yes	-	60	Yes
6001-5060 K	500	600	60	Yes	Yes	-	60	Yes
6001-6060 K	600	600	60	Yes	Yes	-	60	Yes

*Please contact with us for non-standart panel sizes



XX-PS 6090 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6090-2525	250	250	150	Yes	Yes	Yes	150	Yes
6090-2530	250	300	150	Yes	Yes	Yes	150	Yes
6090-3030	300	300	150	Yes	Yes	Yes	150	Yes
6090-3040	300	400	150	Yes	Yes	Yes	150	Yes
6090-4040	400	400	150	Yes	Yes	Yes	150	Yes
6090-4050	400	500	150	Yes	Yes	Yes	150	Yes
6090-5050	500	500	150	Yes	Yes	Yes	150	Yes
6090-5060	500	600	150	Yes	Yes	Yes	150	Yes
6090-6060	600	600	150	Yes	Yes	Yes	150	Yes

*Please contact with us for non-standart panel sizes

XX-PS 6091 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6091-2525	250	250	150	Yes	Yes	Yes	150	Yes
6091-2530	250	300	150	Yes	Yes	Yes	150	Yes
6091-3030	300	300	150	Yes	Yes	Yes	150	Yes
6091-3040	300	400	150	Yes	Yes	Yes	150	Yes
6091-4040	400	400	150	Yes	Yes	Yes	150	Yes
6091-4050	400	500	150	Yes	Yes	Yes	150	Yes
6091-5050	500	500	150	Yes	Yes	Yes	150	Yes
6091-5060	500	600	150	Yes	Yes	Yes	150	Yes
6091-6060	600	600	150	Yes	Yes	Yes	150	Yes

*Please contact with us for non-standart panel sizes

XX-PS 6092 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6092-2525	250	250	150	Yes	Yes	Yes	150	Yes
6092-2530	250	300	150	Yes	Yes	Yes	150	Yes
6092-3030	300	300	150	Yes	Yes	Yes	150	Yes
6092-3040	300	400	150	Yes	Yes	Yes	150	Yes
6092-4040	400	400	150	Yes	Yes	Yes	150	Yes
6092-4050	400	500	150	Yes	Yes	Yes	150	Yes
6092-5050	500	500	150	Yes	Yes	Yes	150	Yes
6092-5060	500	600	150	Yes	Yes	Yes	150	Yes
6092-6060	600	600	150	Yes	Yes	Yes	150	Yes

*Please contact with us for non-standart panel sizes



XX-PS 6091 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
6091-2525 K	250	250	150	Yes	Yes	Yes	150	Yes
6091-2530 K	250	300	150	Yes	Yes	Yes	150	Yes
6091-3030 K	300	300	150	Yes	Yes	Yes	150	Yes
6091-3040 K	300	400	150	Yes	Yes	Yes	150	Yes
6091-4040 K	400	400	150	Yes	Yes	Yes	150	Yes
6091-4050 K	400	500	150	Yes	Yes	Yes	150	Yes
6091-5050 K	500	500	150	Yes	Yes	Yes	150	Yes
6091-5060 K	500	600	150	Yes	Yes	Yes	150	Yes
6091-6060 K	600	600	150	Yes	Yes	Yes	150	Yes

*Please contact with us for non-standart panel sizes



XX-PS 9000 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9000-2525	250	250	90	Yes	Yes	-	90	Yes
9000-2530	250	300	90	Yes	Yes	-	90	Yes
9000-3030	300	300	90	Yes	Yes	-	90	Yes
9000-3040	300	400	90	Yes	Yes	-	90	Yes
9000-4040	400	400	90	Yes	Yes	-	90	Yes
9000-4050	400	500	90	Yes	Yes	-	90	Yes
9000-5050	500	500	90	Yes	Yes	-	90	Yes
9000-5060	500	600	90	Yes	Yes	-	90	Yes
9000-6060	600	600	90	Yes	Yes	-	90	Yes

*Please contact with us for non-standart panel sizes

XX-PS 9001 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9001-2525	250	250	90	Yes	Yes	-	90	Yes
9001-2530	250	300	90	Yes	Yes	-	90	Yes
9001-3030	300	300	90	Yes	Yes	-	90	Yes
9001-3040	300	400	90	Yes	Yes	-	90	Yes
9001-4040	400	400	90	Yes	Yes	-	90	Yes
9001-4050	400	500	90	Yes	Yes	-	90	Yes
9001-5050	500	500	90	Yes	Yes	-	90	Yes
9001-5060	500	600	90	Yes	Yes	-	90	Yes
9001-6060	600	600	90	Yes	Yes	-	90	Yes

*Please contact with us for non-standart panel sizes

XX-PS 9002 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9002-2525	250	250	90	Yes	Yes	-	90	Yes
9002-2530	250	300	90	Yes	Yes	-	90	Yes
9002-3030	300	300	90	Yes	Yes	-	90	Yes
9002-3040	300	400	90	Yes	Yes	-	90	Yes
9002-4040	400	400	90	Yes	Yes	-	90	Yes
9002-4050	400	500	90	Yes	Yes	-	90	Yes
9002-5050	500	500	90	Yes	Yes	-	90	Yes
9002-5060	500	600	90	Yes	Yes	-	90	Yes
9002-6060	600	600	90	Yes	Yes	-	90	Yes

*Please contact with us for non-standart panel sizes



XX-PS 9001 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9001-2525 K	250	250	90	Yes	Yes	-	90	Yes
9001-2530 K	250	300	90	Yes	Yes	-	90	Yes
9001-3030 K	300	300	90	Yes	Yes	-	90	Yes
9001-3040 K	300	400	90	Yes	Yes	-	90	Yes
9001-4040 K	400	400	90	Yes	Yes	-	90	Yes
9001-4050 K	400	500	90	Yes	Yes	-	90	Yes
9001-5050 K	500	500	90	Yes	Yes	-	90	Yes
9001-5060 K	500	600	90	Yes	Yes	-	90	Yes
9001-6060 K	600	600	90	Yes	Yes	-	90	Yes

*Please contact with us for non-standart panel sizes



XX-PS 9090 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9090-2525	250	250	180	Yes	Yes	Yes	180	Yes
9090-2530	250	300	180	Yes	Yes	Yes	180	Yes
9090-3030	300	300	180	Yes	Yes	Yes	180	Yes
9090-3040	300	400	180	Yes	Yes	Yes	180	Yes
9090-4040	400	400	180	Yes	Yes	Yes	180	Yes
9090-4050	400	500	180	Yes	Yes	Yes	180	Yes
9090-5050	500	500	180	Yes	Yes	Yes	180	Yes
9090-5060	500	600	180	Yes	Yes	Yes	180	Yes
9090-6060	600	600	180	Yes	Yes	Yes	180	Yes

*Please contact with us for non-standart panel sizes

XX-PS 9091 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9091-2525	250	250	180	Yes	Yes	Yes	180	Yes
9091-2530	250	300	180	Yes	Yes	Yes	180	Yes
9091-3030	300	300	180	Yes	Yes	Yes	180	Yes
9091-3040	300	400	180	Yes	Yes	Yes	180	Yes
9091-4040	400	400	180	Yes	Yes	Yes	180	Yes
9091-4050	400	500	180	Yes	Yes	Yes	180	Yes
9091-5050	500	500	180	Yes	Yes	Yes	180	Yes
9091-5060	500	600	180	Yes	Yes	Yes	180	Yes
9091-6060	600	600	180	Yes	Yes	Yes	180	Yes

*Please contact with us for non-standart panel sizes

XX-PS 9092 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9092-2525	250	250	180	Yes	Yes	Yes	180	Yes
9092-2530	250	300	180	Yes	Yes	Yes	180	Yes
9092-3030	300	300	180	Yes	Yes	Yes	180	Yes
9092-3040	300	400	180	Yes	Yes	Yes	180	Yes
9092-4040	400	400	180	Yes	Yes	Yes	180	Yes
9092-4050	400	500	180	Yes	Yes	Yes	180	Yes
9092-5050	500	500	180	Yes	Yes	Yes	180	Yes
9092-5060	500	600	180	Yes	Yes	Yes	180	Yes
9092-6060	600	600	180	Yes	Yes	Yes	180	Yes

*Please contact with us for non-standart panel sizes



XX-PS 9091 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
9091-2525 K	250	250	180	Yes	Yes	Yes	180	Yes
9091-2530 K	250	300	180	Yes	Yes	Yes	180	Yes
9091-3030 K	300	300	180	Yes	Yes	Yes	180	Yes
9091-3040 K	300	400	180	Yes	Yes	Yes	180	Yes
9091-4040 K	400	400	180	Yes	Yes	Yes	180	Yes
9091-4050 K	400	500	180	Yes	Yes	Yes	180	Yes
9091-5050 K	500	500	180	Yes	Yes	Yes	180	Yes
9091-5060 K	500	600	180	Yes	Yes	Yes	180	Yes
9091-6060 K	600	600	180	Yes	Yes	Yes	180	Yes

*Please contact with us for non-standart panel sizes



XX-PS 1200 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1200-2525	250	250	120	Yes	Yes	-	120	Yes
1200-2530	250	300	120	Yes	Yes	-	120	Yes
1200-3030	300	300	120	Yes	Yes	-	120	Yes
1200-3040	300	400	120	Yes	Yes	-	120	Yes
1200-4040	400	400	120	Yes	Yes	-	120	Yes
1200-4050	400	500	120	Yes	Yes	-	120	Yes
1200-5050	500	500	120	Yes	Yes	-	120	Yes
1200-5060	500	600	120	Yes	Yes	-	120	Yes
1200-6060	600	600	120	Yes	Yes	-	120	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1201 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1201-2525	250	250	120	Yes	Yes	-	120	Yes
1201-2530	250	300	120	Yes	Yes	-	120	Yes
1201-3030	300	300	120	Yes	Yes	-	120	Yes
1201-3040	300	400	120	Yes	Yes	-	120	Yes
1201-4040	400	400	120	Yes	Yes	-	120	Yes
1201-4050	400	500	120	Yes	Yes	-	120	Yes
1201-5050	500	500	120	Yes	Yes	-	120	Yes
1201-5060	500	600	120	Yes	Yes	-	120	Yes
1201-6060	600	600	120	Yes	Yes	-	120	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1202 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1202-2525	250	250	120	Yes	Yes	-	120	Yes
1202-2530	250	300	120	Yes	Yes	-	120	Yes
1202-3030	300	300	120	Yes	Yes	-	120	Yes
1202-3040	300	400	120	Yes	Yes	-	120	Yes
1202-4040	400	400	120	Yes	Yes	-	120	Yes
1202-4050	400	500	120	Yes	Yes	-	120	Yes
1202-5050	500	500	120	Yes	Yes	-	120	Yes
1202-5060	500	600	120	Yes	Yes	-	120	Yes
1202-6060	600	600	120	Yes	Yes	-	120	Yes



*Please contact with us for non-standart panel sizes

XX-PS 1201 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1201-2525 K	250	250	120	Yes	Yes	-	120	Yes
1201-2530 K	250	300	120	Yes	Yes	-	120	Yes
1201-3030 K	300	300	120	Yes	Yes	-	120	Yes
1201-3040 K	300	400	120	Yes	Yes	-	120	Yes
1201-4040 K	400	400	120	Yes	Yes	-	120	Yes
1201-4050 K	400	500	120	Yes	Yes	-	120	Yes
1201-5050 K	500	500	120	Yes	Yes	-	120	Yes
1201-5060 K	500	600	120	Yes	Yes	-	120	Yes
1201-6060 K	600	600	120	Yes	Yes	-	120	Yes



*Please contact with us for non-standart panel sizes

XX-PS 1290 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1290-2525	250	250	210	Yes	Yes	Yes	210	Yes
1290-2530	250	300	210	Yes	Yes	Yes	210	Yes
1290-3030	300	300	210	Yes	Yes	Yes	210	Yes
1290-3040	300	400	210	Yes	Yes	Yes	210	Yes
1290-4040	400	400	210	Yes	Yes	Yes	210	Yes
1290-4050	400	500	210	Yes	Yes	Yes	210	Yes
1290-5050	500	500	210	Yes	Yes	Yes	210	Yes
1290-5060	500	600	210	Yes	Yes	Yes	210	Yes
1290-6060	600	600	210	Yes	Yes	Yes	210	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1291 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1291-2525	250	250	210	Yes	Yes	Yes	210	Yes
1291-2530	250	300	210	Yes	Yes	Yes	210	Yes
1291-3030	300	300	210	Yes	Yes	Yes	210	Yes
1291-3040	300	400	210	Yes	Yes	Yes	210	Yes
1291-4040	400	400	210	Yes	Yes	Yes	210	Yes
1291-4050	400	500	210	Yes	Yes	Yes	210	Yes
1291-5050	500	500	210	Yes	Yes	Yes	210	Yes
1291-5060	500	600	210	Yes	Yes	Yes	210	Yes
1291-6060	600	600	210	Yes	Yes	Yes	210	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1292 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1292-2525	250	250	210	Yes	Yes	Yes	210	Yes
1292-2530	250	300	210	Yes	Yes	Yes	210	Yes
1292-3030	300	300	210	Yes	Yes	Yes	210	Yes
1292-3040	300	400	210	Yes	Yes	Yes	210	Yes
1292-4040	400	400	210	Yes	Yes	Yes	210	Yes
1292-4050	400	500	210	Yes	Yes	Yes	210	Yes
1292-5050	500	500	210	Yes	Yes	Yes	210	Yes
1292-5060	500	600	210	Yes	Yes	Yes	210	Yes
1292-6060	600	600	210	Yes	Yes	Yes	210	Yes

*Please contact with us for non-standart panel sizes



XX-PS 1291 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	118x65,5 mm
1291-2525 K	250	250	210	Yes	Yes	Yes	210	Yes
1291-2530 K	250	300	210	Yes	Yes	Yes	210	Yes
1291-3030 K	300	300	210	Yes	Yes	Yes	210	Yes
1291-3040 K	300	400	210	Yes	Yes	Yes	210	Yes
1291-4040 K	400	400	210	Yes	Yes	Yes	210	Yes
1291-4050 K	400	500	210	Yes	Yes	Yes	210	Yes
1291-5050 K	500	500	210	Yes	Yes	Yes	210	Yes
1291-5060 K	500	600	210	Yes	Yes	Yes	210	Yes
1291-6060 K	600	600	210	Yes	Yes	Yes	210	Yes

*Please contact with us for non-standart panel sizes



XX-PS 1500 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1500-2525	250	250	150	Yes	Yes	-	150	Yes
1500-2530	250	300	150	Yes	Yes	-	150	Yes
1500-3030	300	300	150	Yes	Yes	-	150	Yes
1500-3040	300	400	150	Yes	Yes	-	150	Yes
1500-4040	400	400	150	Yes	Yes	-	150	Yes
1500-4050	400	500	150	Yes	Yes	-	150	Yes
1500-5050	500	500	150	Yes	Yes	-	150	Yes
1500-5060	500	600	150	Yes	Yes	-	150	Yes
1500-6060	600	600	150	Yes	Yes	-	150	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1501 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1501-2525	250	250	150	Yes	Yes	-	150	Yes
1501-2530	250	300	150	Yes	Yes	-	150	Yes
1501-3030	300	300	150	Yes	Yes	-	150	Yes
1501-3040	300	400	150	Yes	Yes	-	150	Yes
1501-4040	400	400	150	Yes	Yes	-	150	Yes
1501-4050	400	500	150	Yes	Yes	-	150	Yes
1501-5050	500	500	150	Yes	Yes	-	150	Yes
1501-5060	500	600	150	Yes	Yes	-	150	Yes
1501-6060	600	600	150	Yes	Yes	-	150	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1502 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1502-2525	250	250	150	Yes	Yes	-	150	Yes
1502-2530	250	300	150	Yes	Yes	-	150	Yes
1502-3030	300	300	150	Yes	Yes	-	150	Yes
1502-3040	300	400	150	Yes	Yes	-	150	Yes
1502-4040	400	400	150	Yes	Yes	-	150	Yes
1502-4050	400	500	150	Yes	Yes	-	150	Yes
1502-5050	500	500	150	Yes	Yes	-	150	Yes
1502-5060	500	600	150	Yes	Yes	-	150	Yes
1502-6060	600	600	150	Yes	Yes	-	150	Yes



*Please contact with us for non-standart panel sizes

XX-PS 1501 K Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1501-2525 K	250	250	150	Yes	Yes	-	150	Yes
1501-2530 K	250	300	150	Yes	Yes	-	150	Yes
1501-3030 K	300	300	150	Yes	Yes	-	150	Yes
1501-3040 K	300	400	150	Yes	Yes	-	150	Yes
1501-4040 K	400	400	150	Yes	Yes	-	150	Yes
1501-4050 K	400	500	150	Yes	Yes	-	150	Yes
1501-5050 K	500	500	150	Yes	Yes	-	150	Yes
1501-5060 K	500	600	150	Yes	Yes	-	150	Yes
1501-6060 K	600	600	150	Yes	Yes	-	150	Yes



*Please contact with us for non-standart panel sizes

XX-PS 1590 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1590-2525	250	250	240	Yes	Yes	Yes	240	Yes
1590-2530	250	300	240	Yes	Yes	Yes	240	Yes
1590-3030	300	300	240	Yes	Yes	Yes	240	Yes
1590-3040	300	400	240	Yes	Yes	Yes	240	Yes
1590-4040	400	400	240	Yes	Yes	Yes	240	Yes
1590-4050	400	500	240	Yes	Yes	Yes	240	Yes
1590-5050	500	500	240	Yes	Yes	Yes	240	Yes
1590-5060	500	600	240	Yes	Yes	Yes	240	Yes
1590-6060	600	600	240	Yes	Yes	Yes	240	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1591 Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1591-2525	250	250	240	Yes	Yes	Yes	240	Yes
1591-2530	250	300	240	Yes	Yes	Yes	240	Yes
1591-3030	300	300	240	Yes	Yes	Yes	240	Yes
1591-3040	300	400	240	Yes	Yes	Yes	240	Yes
1591-4040	400	400	240	Yes	Yes	Yes	240	Yes
1591-4050	400	500	240	Yes	Yes	Yes	240	Yes
1591-5050	500	500	240	Yes	Yes	Yes	240	Yes
1591-5060	500	600	240	Yes	Yes	Yes	240	Yes
1591-6060	600	600	240	Yes	Yes	Yes	240	Yes

*Please contact with us for non-standart panel sizes

XX-PS 1592 Series

Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1592-2525	250	250	240	Yes	Yes	Yes	240	Yes
1592-2530	250	300	240	Yes	Yes	Yes	240	Yes
1592-3030	300	300	240	Yes	Yes	Yes	240	Yes
1592-3040	300	400	240	Yes	Yes	Yes	240	Yes
1592-4040	400	400	240	Yes	Yes	Yes	240	Yes
1592-4050	400	500	240	Yes	Yes	Yes	240	Yes
1592-5050	500	500	240	Yes	Yes	Yes	240	Yes
1592-5060	500	600	240	Yes	Yes	Yes	240	Yes
1592-6060	600	600	240	Yes	Yes	Yes	240	Yes

*Please contact with us for non-standart panel sizes



XX-PS 1591 K Series



Article No	Installation Area			Back Area		Installation Depth		
PRO	Width (mm)	Height (mm)	Depth (mm)	Hinge	Locking Mechanism	H Profile Installation Platform	Installation Depth (mm)	Ø 130mm
1591-2525 K	250	250	240	Yes	Yes	Yes	240	Yes
1591-2530 K	250	300	240	Yes	Yes	Yes	240	Yes
1591-3030 K	300	300	240	Yes	Yes	Yes	240	Yes
1591-3040 K	300	400	240	Yes	Yes	Yes	240	Yes
1591-4040 K	400	400	240	Yes	Yes	Yes	240	Yes
1591-4050 K	400	500	240	Yes	Yes	Yes	240	Yes
1591-5050 K	500	500	240	Yes	Yes	Yes	240	Yes
1591-5060 K	500	600	240	Yes	Yes	Yes	240	Yes
1591-6060 K	600	600	240	Yes	Yes	Yes	240	Yes

*Please contact with us for non-standart panel sizes




Panel Wall Mounting Application


Wall application examples for XX-PS 060 series panel
Please contact us to find out the feasibility of the products

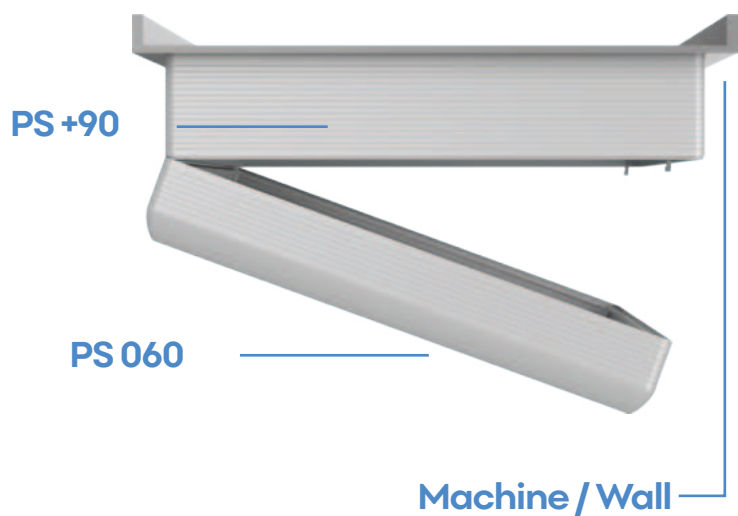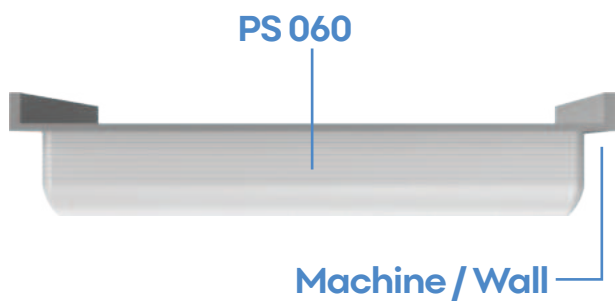

Panel Wall Mounting Application

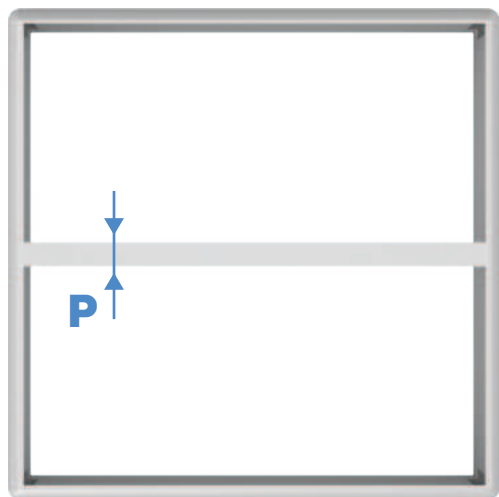

P= 25 mm Front Face 25 mm

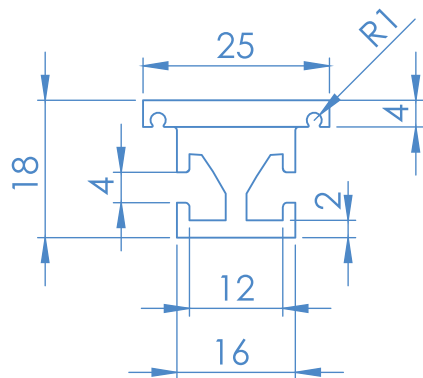

Front Sheet Installation

XX-PS Panel



Zamak Alloys Connector



Panel Back Plate Fixed
(Screw)



Panel Back Plate Moveable
(Hinge)



Front Sheet Unprocessed

Front Sheet Unprocessed
Suitable for PRO Panels





Article No	Installation Area		
PRO	Width (mm)	Height (mm)	Thickness (mm)
XX-FS2.3030	300	300	2
XX-FS2.3040	300	400	2
XX-FS2.4040	400	400	2
XX-FS2.4050	400	500	2
XX-FS2.5050	500	500	2
XX-FS2.5060	500	600	2
XX-FS2.6060	600	600	2
XX-FS3.3030	300	300	3
XX-FS3.3040	300	400	3
XX-FS3.4040	400	400	3
XX-FS3.4050	400	500	3
XX-FS3.5050	500	500	3
XX-FS3.5060	500	600	3
XX-FS3.6060	600	600	3

Front Sheet Processed
Suitable for PRO Panels



Article No	Installation Area		
PRO	Width (mm)	Height (mm)	Thickness (mm)
XX-FS2.3030-1	300	300	2
XX-FS2.3040-1	300	400	2
XX-FS2.4040-1	400	400	2
XX-FS2.4050-1	400	500	2
XX-FS2.5050-1	500	500	2
XX-FS2.5060-1	500	600	2
XX-FS2.6060-1	600	600	2
XX-FS3.3030-1	300	300	3
XX-FS3.3040-1	300	400	3
XX-FS3.4040-1	400	400	3
XX-FS3.4050-1	400	500	3
XX-FS3.5050-1	500	500	3
XX-FS3.5060-1	500	600	3
XX-FS3.6060-1	600	600	3

Front Sheet Application



P= 21,5mm Instalation Area 

Compatible Panel Connections

XX-PS 60

XX-PS 090

XX-PS 120

XX-PS 150

PS 060

PS +90
PS 060

PS 090

PS +90
PS 090

PS 120

PS +90
PS 120

PS 150

PS +90
PS 150

 XX-TA050.400	✓	✓	✓	✓	✓	✓	✓	✓
 XX-TA050.830	✓	✓	✓	✓	✓	✓	✓	✓
 XX-TA080.310	x	x	x	x	✓	✓	✓	✓
 XX-TA080.320	x	x	x	x	✓	✓	✓	✓
 XX-TA080.321	x	x	x	x	✓	✓	✓	✓
 XX-TA080.400	✓	✓	✓	✓	✓	✓	✓	✓
 XX-TA080.826	✓	✓	✓	✓	✓	✓	✓	✓
 XX-TA080.830	✓	✓	✓	✓	✓	✓	✓	✓

☒ Compatible
 ☐ Incompatible

Articles starting with 'Only' are only valid for the related module.

Some modules may be compatible or incompatible according to the size dimensions of the panel frame dimensions. Please contact us for further information

XX-PS 60

XX-PS 090

XX-PS 120

XX-PS 150

PS 060

PS +90
PS 060

PS 090

PS +90
PS 090

PS 120

PS +90
PS 120

PS 150

PS +90
PS 150

	✓	✓	✓	✓	✓	✓	✓	✓
XX-TA080.831								
	✓	x	x	x	x	x	x	x
XX-TA080.832								
	✓	✓	✓	✓	✓	✓	✓	✓
XX-TA080.833								
	x	x	x	x	✓	Only PRO120	✓	Only PRO150
XX-TA080.834								
	✓	✓	✓	✓	✓	✓	✓	✓
XX-TA080.835								
	x	x	x	x	✓	Only PRO120	✓	Only PRO150
XX-TA080.840								
	x	x	x	x	✓	Only PRO120	✓	Only PRO150
XX-TA130.310								
	x	x	x	x	✓	Only PRO120	✓	Only PRO150
XX-TA130.320								
	x	x	x	x	✓	Only PRO120	✓	Only PRO150
XX-TA130.400								




✓ Compatible x Incompatible

Articles starting with 'Only' are only valid for the related module.

Some modules may be compatible or incompatible according to the size dimensions of the panel frame dimensions.
Please contact us for further information

KIOSK SYSTEMS



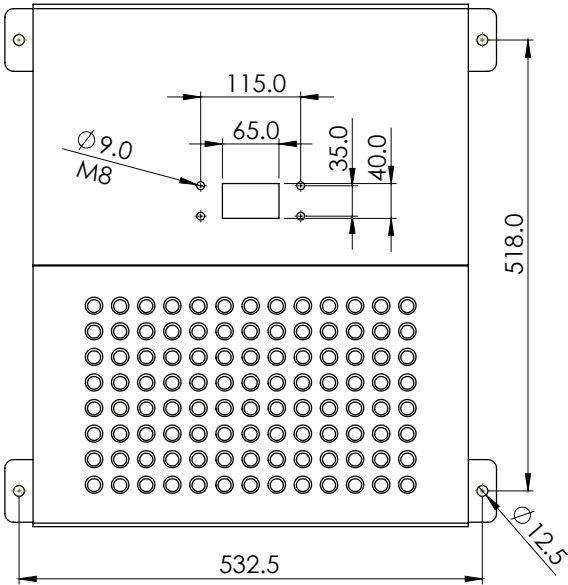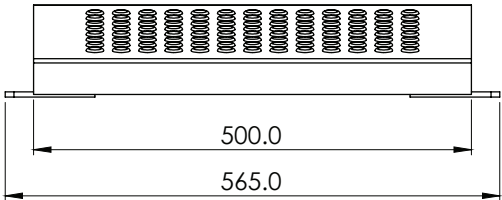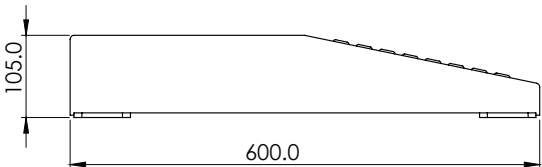


This product is produced to provide an optional placement of the electronic and operator devices such as PC and touch screen to any desired position. It is a fixed kiosk to the ground with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 80 kilograms. The product can be redesigned in color and specifications according to the client requests.



Weight	17000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	510x110x610 mm
Movement	Fixed

XX-SS80.02




Kiosk Plate

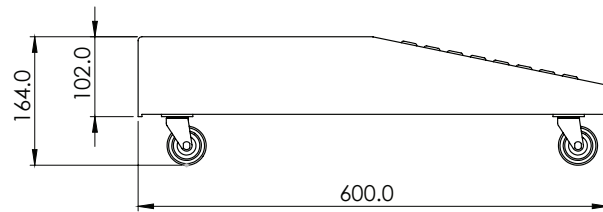

This product is produced to provide ease of movement and transportation of the electronic and operator devices such as PC and touch screen. It is a wheeled kiosk with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 80 kilograms. The product can be redesigned in color and specifications according to the client requests.

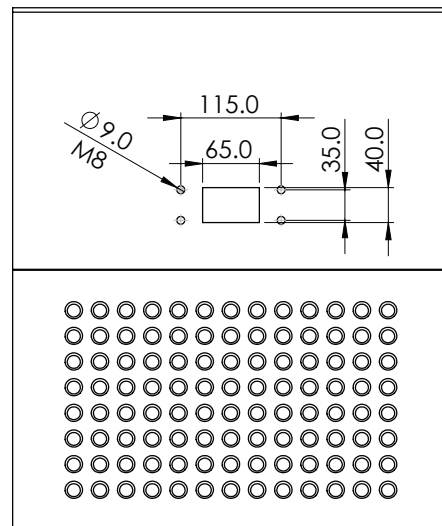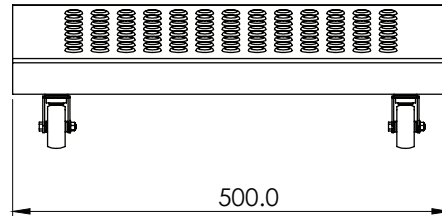

Weight	17000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	510x110x610 mm
Movement	Modular

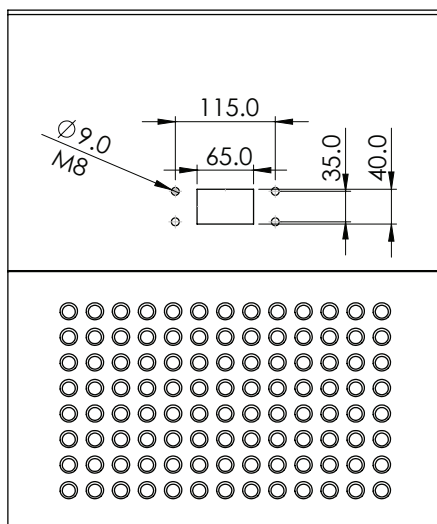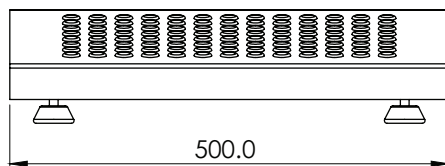
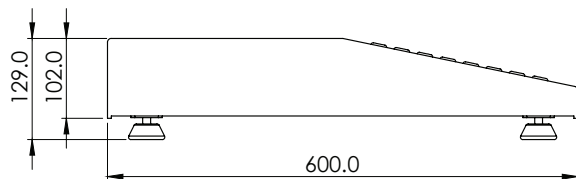


This product is produced to provide an optional placement of the electronic and operator devices such as PC and touch screen to any desired position. It is a fixed kiosk with adjustable feet with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 80 kilograms. The product can be redesigned in color and specifications according to the client requests.

Weight	17000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	510x110x610 mm
Movement	Fixed


XX-SS130.01




Kiosk Plate

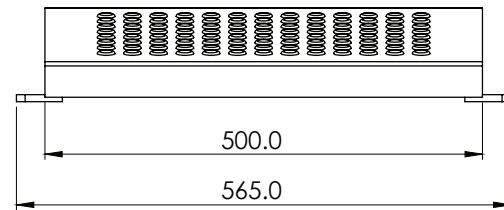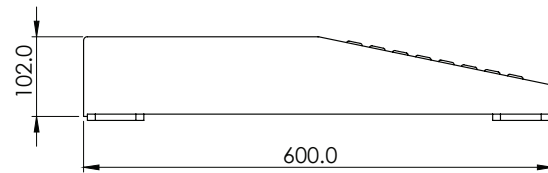

This product is produced to provide an optional placement of the electronic and operator devices such as PC and touch screen to any desired position. It is a fixed kiosk to the ground with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 130 kilograms. The product can be redesigned in color and specifications according to the client requests.

Weight	17000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	510x110x610 mm
Movement	Fixed

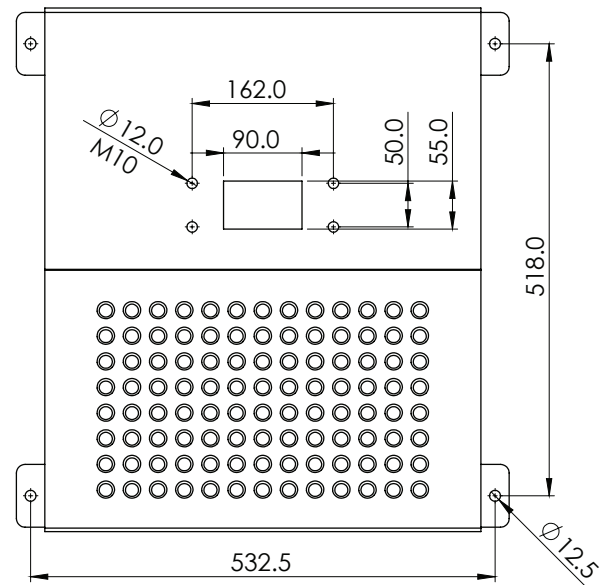

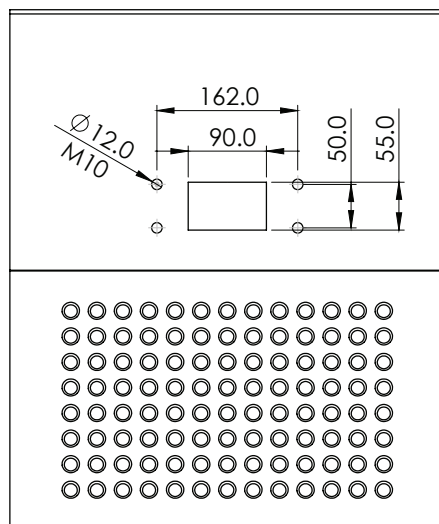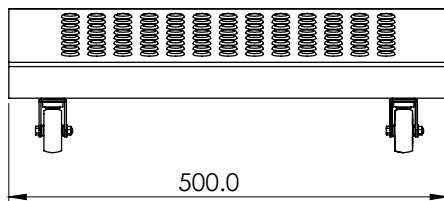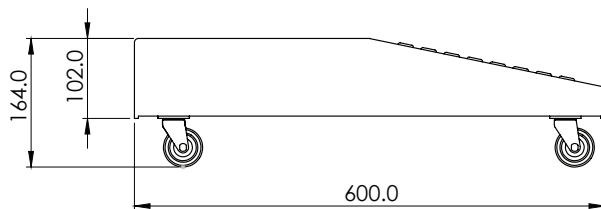


This product is produced to provide ease of movement and transportation of the electronic and operator devices such as PC and touch screen. It is a wheeled kiosk with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 130 kilograms. The product can be redesigned in color and specifications according to the client requests.



Weight	17000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	510x110x610 mm
Movement	Modular

XX-SS130.03


Kiosk Plate

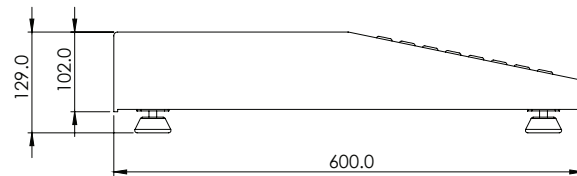

This product is produced to provide an optional placement of the electronic and operator devices such as PC and touch screen to any desired position. It is a fixed kiosk with adjustable feet with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 130 kilograms. The product can be redesigned in color and specifications according to the client requests.

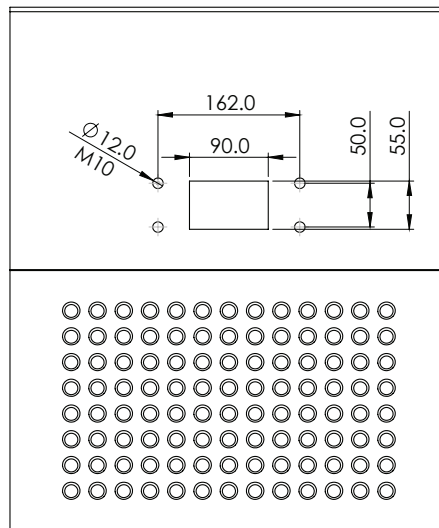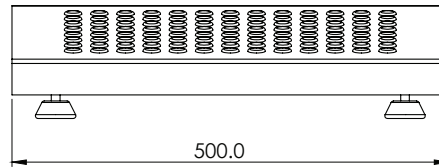

Weight	17000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	510x110x610 mm
Movement	Fixed

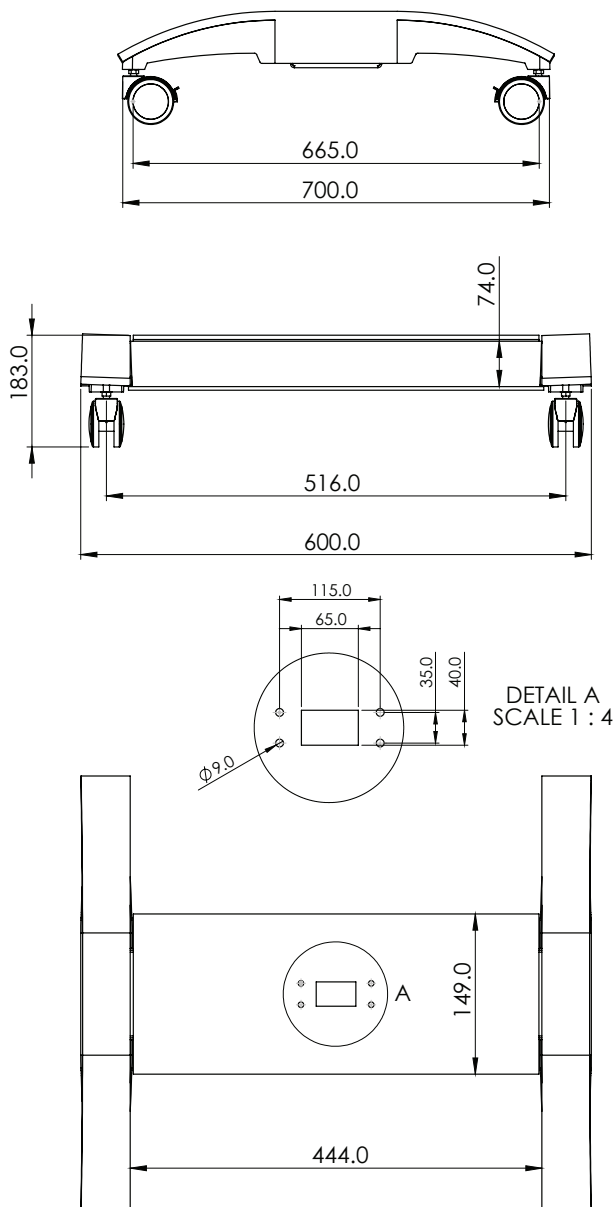

This product is produced to provide ease of movement and transportation of the electronic and operator devices such as PC and touch screen. It is a wheeled slim kiosk with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 80 kilograms. The product can be redesigned in color and specifications according to the client requests.


Weight	12000 gr
Color Ral No	RAL 7035 / RAL 7016
Package	1
Package Dimension	335x705x95 mm
Movement	Modular

XX-SH130

Kiosk Slim



This product is produced to provide ease of movement and transportation of the electronic and operator devices such as PC and touch screen. It is a wheeled slim kiosk with a rectangular platform structure which balances the strength of the kiosk holding the electronic devices. It has a weight carrying capacity of 130 kilograms. The product can be redesigned in color and specifications according to the client requests.

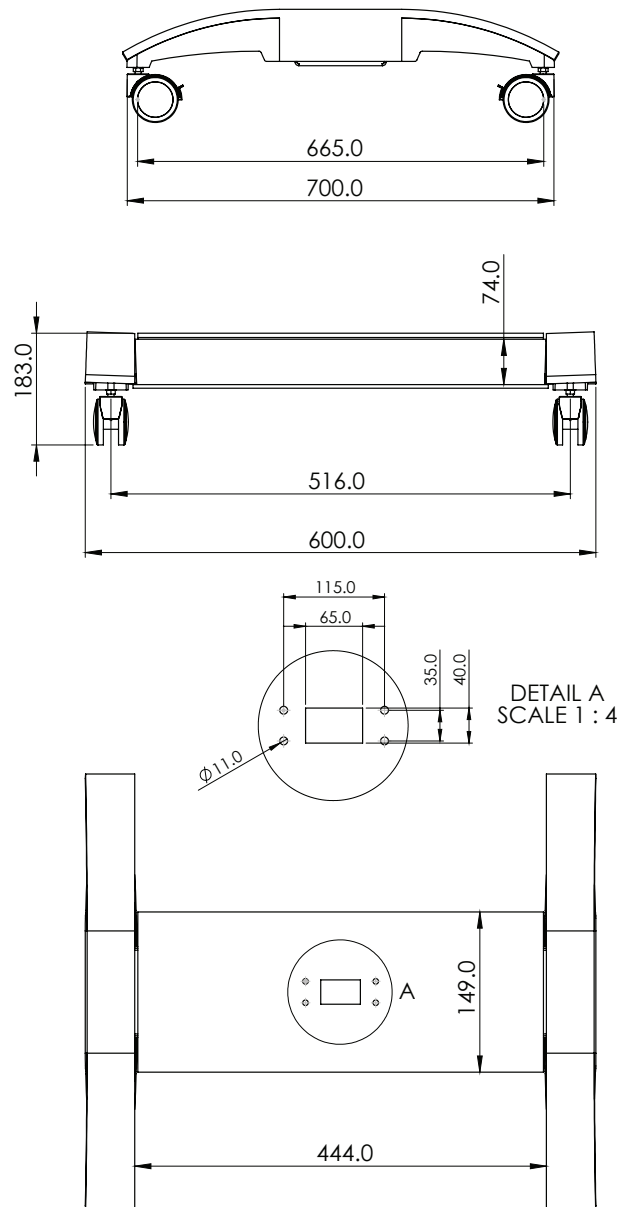


Weight	12000 gr
Color Ral No	RAL 7035 / RAL 7016
Package	1
Package Dimension	335x705x95 mm
Movement	Modular

Kiosk Systems

Kiosk PC Cabinet

XX-SC01

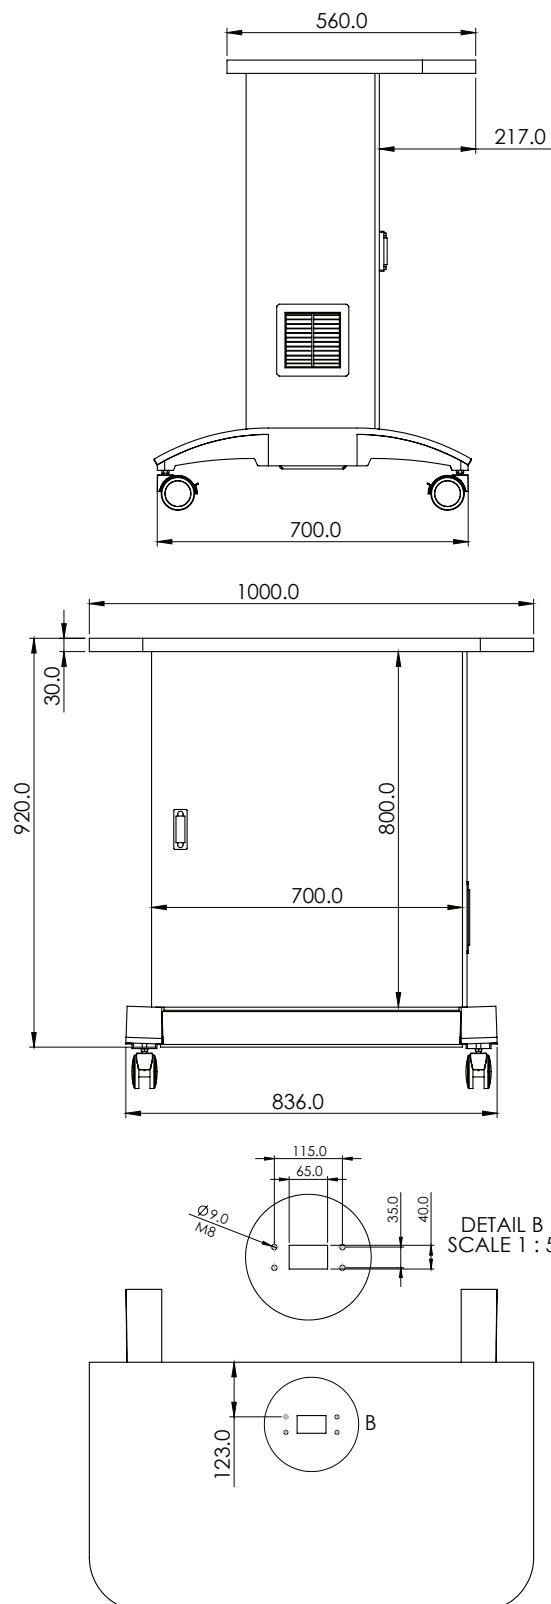

Kiosk PC Cabinets are designed by adding to the kiosk a closed cabinet system on wheeled plate which will provide an extra protection for the computers and will facilitate the functionality of the control and the movement of electronic operating systems. It also produced with an extra enlarged upper surface that facilitates the placement of accessories such as a useful cover design, and the ventilation fan that prevents deformation inside the cabinet. The standard dimensions of the model are 1010 mm in height, 1000 mm in width and 300 mm in depth. The product can be redesigned in color and specifications according to the client requests.




Weight	100.000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	650x710x1200 mm
Movement	Modular

XX-SC02


Kiosk PC Cabinet



Kiosk PC Cabinets are designed by adding to the kiosk a closed cabinet system on wheeled plate which will provide an extra protection for the computers and will facilitate the functionality of the control and the movement of electronic operating systems. It also produced with an extra enlarged upper surface that facilitates the placement of accessories such as a useful cover design, and the ventilation fan that prevents deformation inside the cabinet. The standard dimensions of the model are 1010 mm in height, 1000 mm in width and 300 mm in depth. The product can be redesigned in color and specifications according to the client requests.

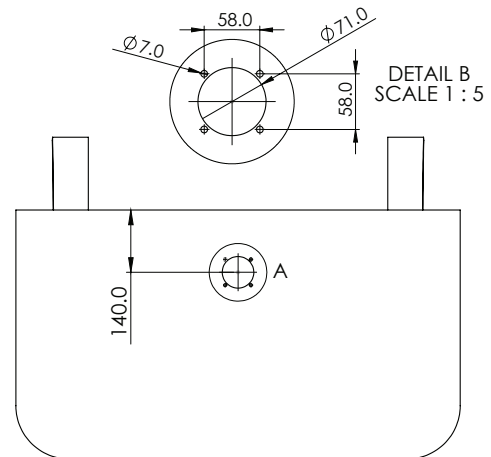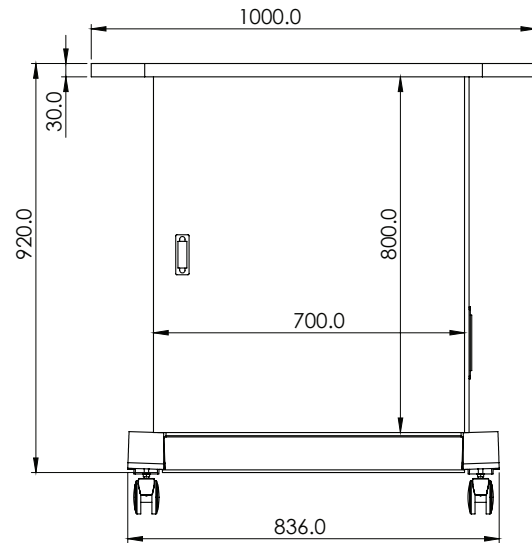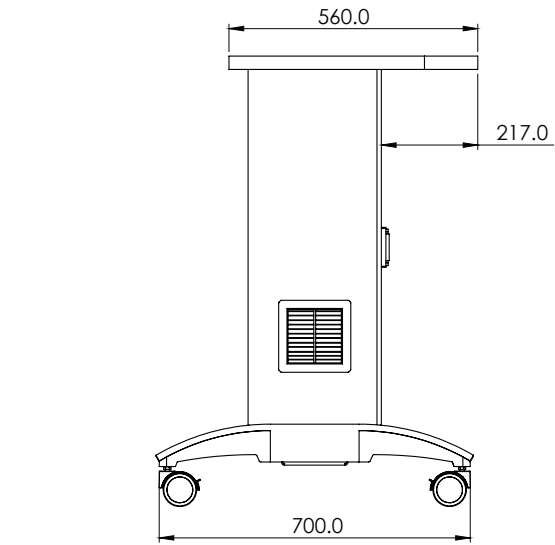

Weight	100.000 gr
Color Ral No	RAL 7035
Package	1
Package Dimension	650x710x1200 mm
Movement	Modular

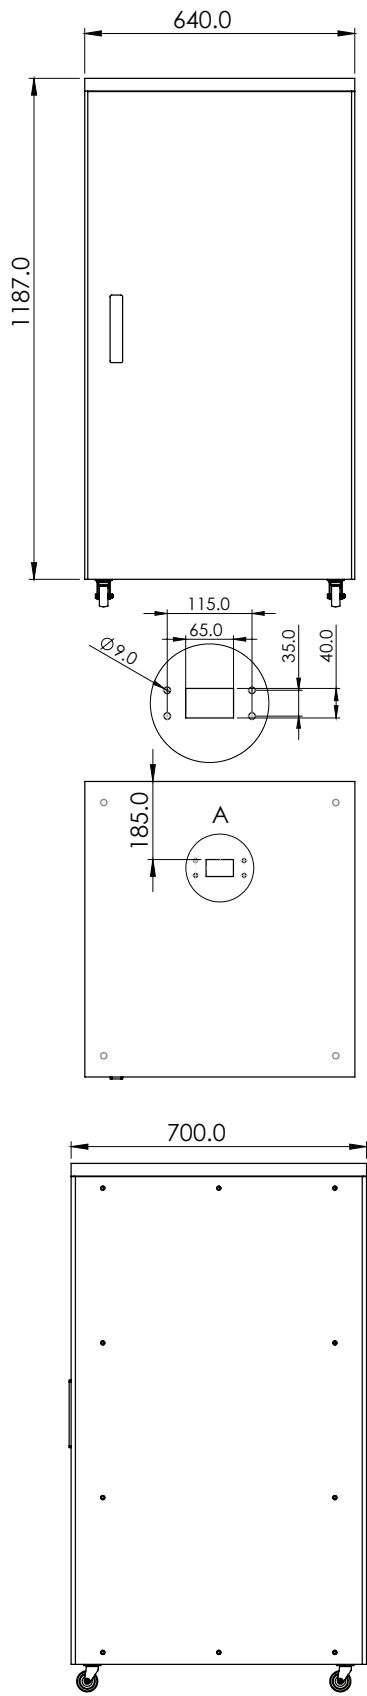

XX-TA.130.811 Warning Lamp Cover (M18) is placed on the corner module ensuring an area for the warning lamp to be placed. The warning lamp connection diameter is M18×1.5




Weight	1000 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	$\varnothing 130$ mm

XX-SPC02

Kiosk Cabinet Systems




130/080 Support Arm Adaptor is used to secure the connection between XX-TA.130 and XX-TA.080. Its is designed for configurations of heavy loads. The configurations with this product prevent vibrating and sagging as a result of heavy loads. This support Arm Adaptor can be used horizontally or vertically.

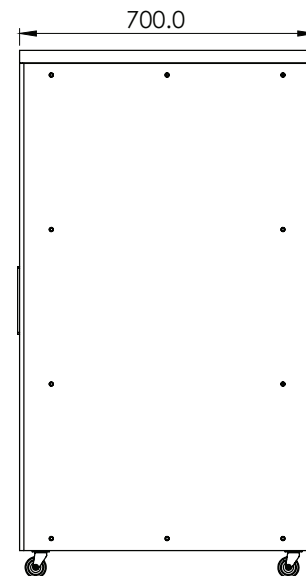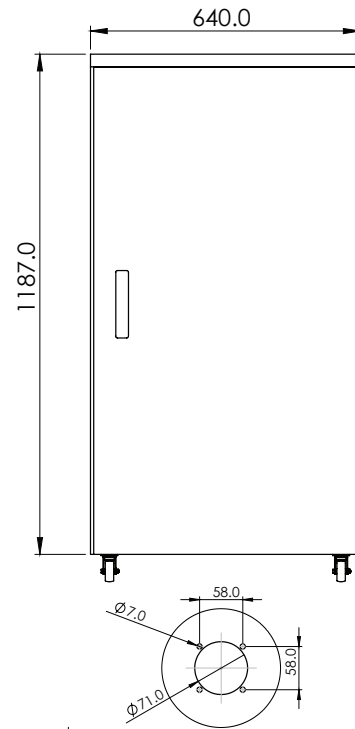


Weight	1000 gr
Color Ral No	RAL 7035 (Cover RAL 7016)
Package	1
Package Dimension	150x160x140 mm
Material	Aluminum
Movement	Rotatable 315°
Diameter	Ø130 mm

COUPLING TOWERS

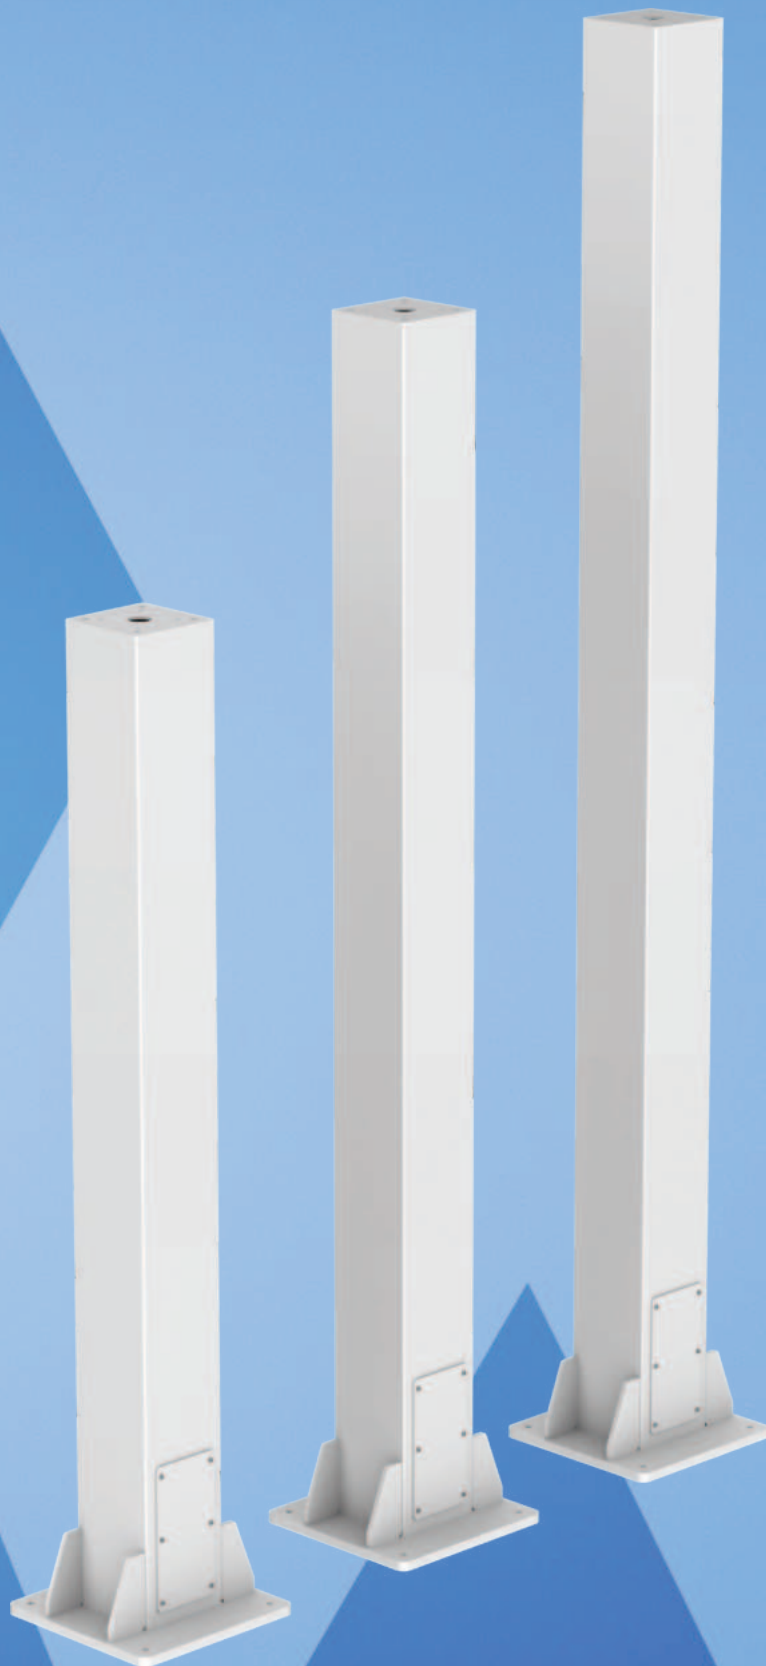

Coupling Towers

XX-TW150 Series

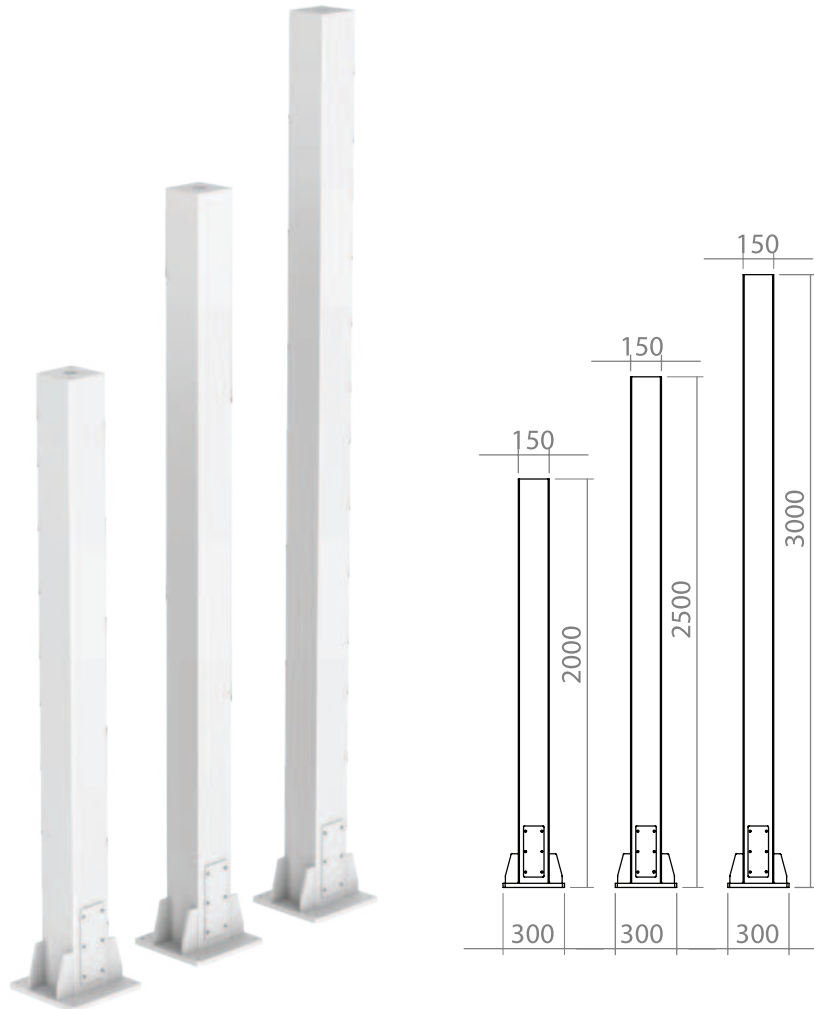


We use an ergonomic coupling tower which provides a strong support for your application. Towers hold and protect the industrial controllers, PCs and operating panels and offers a secure accommodation for all connected cables. We have many tower dimensions and the RAL 7035 is the standard color used.

Tower Dimensions :

150x150 (LxW) and 2.0 , 2.5 , or 3.0 mt Height


200x200 (LxW) and 2.0 , 2.5 , or 3.0 mt Height

XX-TW200 Series

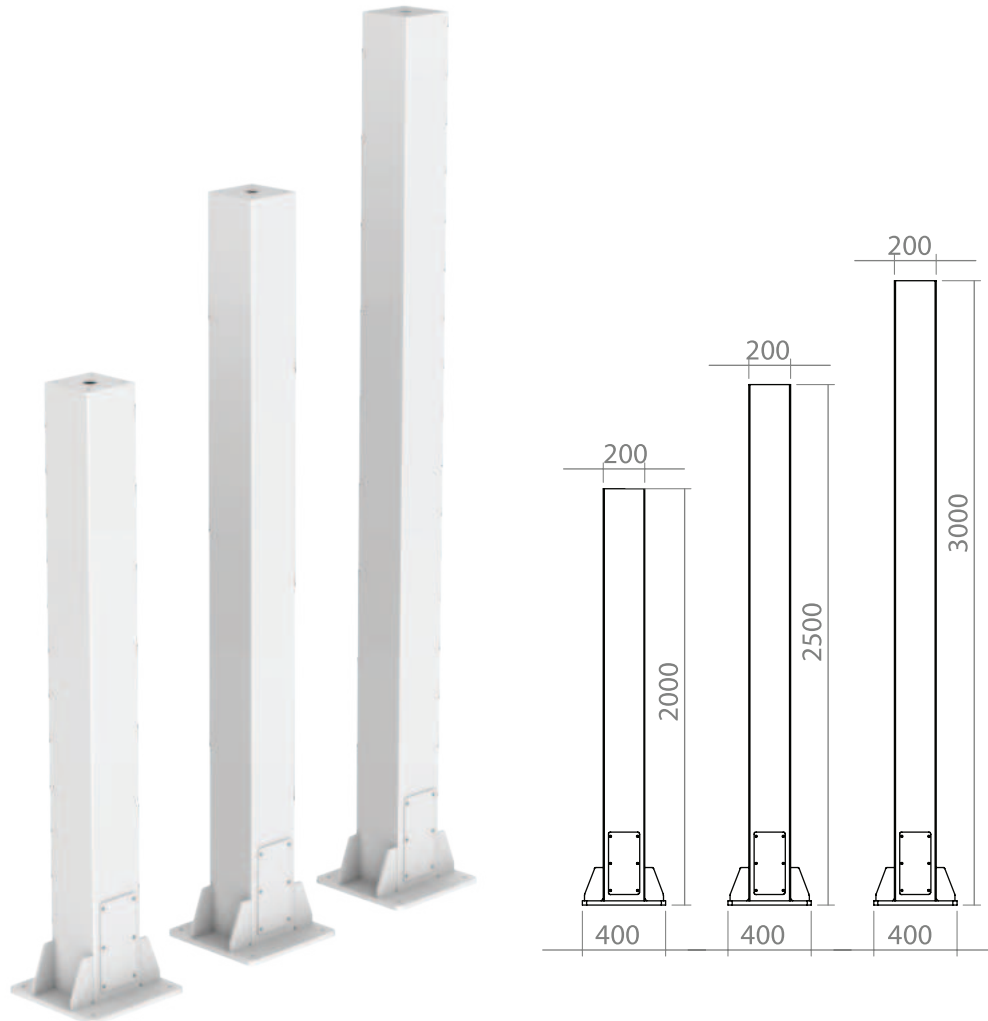

	XX-TW150.200	XX-TW150.250	XX-TW150.300	XX-TW200.200	XX-TW200.250	XX-TW200.300
Weight (kg)	45	55	65	70	80	100
Length (mm)	2000	2500	3000	2000	2500	3000
Color No	7035	7035	7035	7035	7035	7035
Package	1	1	1	1	1	1
Package Dimension (mm)	320x320x2020	320x320x2520	320x320x3020	420x420x2020	420x420x2520	420x420x3020
Movement	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed

WARNING LAMP

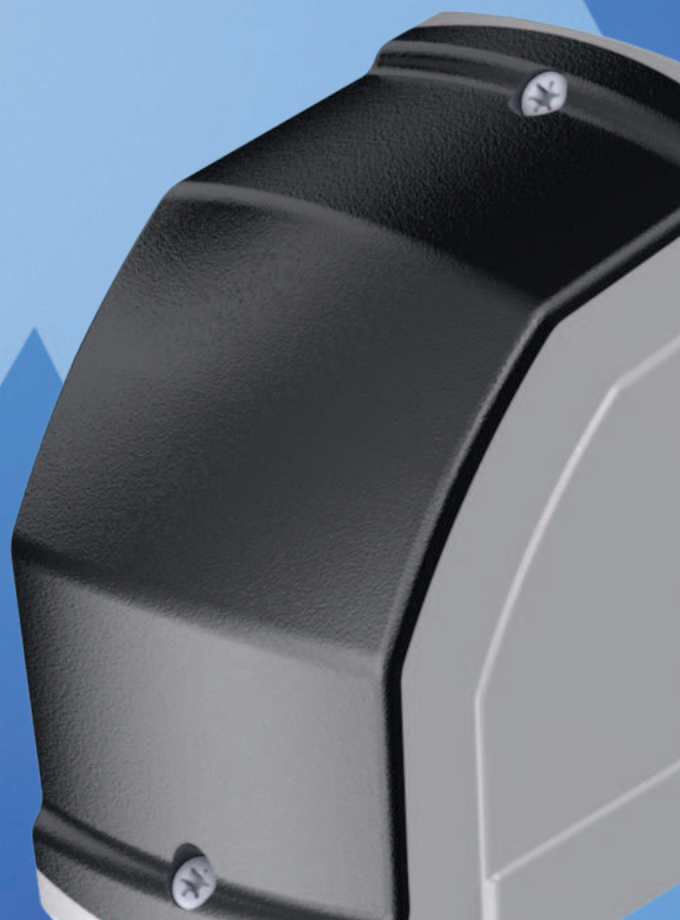



Model	WL-T6	WL-R6	WL-T/V/R7K	WL-Q	WL-B	WL-PRO	WL-V/VB50
Voltage	24VAC-DC						
Power	Max. 3.2W per color					Max. 1.3W per color	
Luminous Source	LED						
Signal Type	Continuous/Flashing/Strobe					Continuous	
Color	Red/Green/Yellow/Blue/White					Red/Green/Yellow	
Lens Material	PC						
Housing Material	ABS					Aluminum	ABS
Buzzer Output (dB)	92dB						
Mounting Type	Screw Mounted	PG13.5 Locknut Mounted	Screw/Bolt/ Locknut Mounted	Screw Mounted to Wall	Screw Mounted to Wall	Screw Mounted	M32 Locknut Mounted
Connection	Cable or Connector						
Protection	IP65						

Warning Lamps

Our variety of pick-to-light solutions guide the operators to pick the part next to be assembled. This eliminates the possibility of faulty production, lowers costs and increases speed and efficiency in the production line.



WL-PL50-P



WL-PL50-S



WL-PL50-T



WL-V50

Model	WL-PL50-P	WL-PL50-S	WL-PL50-T
Voltage	18-30V		
Current	75 mA		
Output Rating	Max. load 150mA		
Color	Red, Green, Blue, Yellow, White		
Lens Material	PC		
Housing Material	ABS		
Sensing Principle	Mechanical Button - Optical - Capacitive Touch		
Buzzer	-	✓	-
Response Time	< 50milli seconds ON and OFF		
Working Temperature	-40...50°C		
Protection	IP69K		
Dimensions	Ø50xH62 mm	Ø50xH55 mm	Ø50xH76,7 mm
Mounting Type	M30x1,5mm		
Connection	5 pin M12 Male Connector or 0.7m cable		

Warning Lamps

Ø50

PM5 SERIES

Aesthetic, Powerful, Modular, Functional



Model	WLPM5-..1	WLPM5-..2	WLPM5-..3	WLPM5-..4	WLPM5-..5
Voltage	12VDC - 24VDC - 110VAC - 220VAC				
Power	Red: 1.5W, Green-Yellow-Blue-White : 0.9W				
Luminous Source	LED				
Signal Type	Multi (Continuous/Flashing)				
Colors	Red, Green, Yellow, Blue, White (one for each level)				
Lens Material	PC				
Housing Material	ABS				
Buzzer Tone Type	Multi (Continuous/Intermittent)				
Buzzer Output (dB)	92dB				
Protection	IP65				
Weight Approx (kg)	0,17	0,22	0,26	0,31	0,35
Dimensions (mm)	55x75x176	55x75x225	55x75x274	55x75x324	55x75x373
Mounting	Base mount with M5 bolts				
Connection	Unterminated cable				

Ø50

PROFESSIONAL



Model	WL-PRO-..1	WL-PRO-..2	WL-PRO-..3	WL-PRO-..4	WL-PRO-..5
Voltage	24 VDC				
Power	Red: 1.5W, Green-Yellow-Blue-White : 0.9W				
Luminous Source	LED				
Signal Type	Continuous				
Colors	Red, Green, Yellow, Blue, White (one for each level)				
Lens Material	PC				
Housing Material	Aluminium				
Buzzer Tone Type	Intermittent				
Buzzer Output (dB)	92dB				
Protection	IP65				
Weight Approx (kg)	0.36	0.42	0.48	0.54	0.6
Dimensions (mm)	78x52x246	78x52x314	78x52x382	78x52x450	78x52x518
Mounting	Base mount with M4 bolts				
Connection	Unterminated cable				

Warning Lamps

Ø50



Model	WL-T5-..1	WL-T5-..2	WL-T5-..3	WL-T5-..4	WL-T5-..5
Voltage	12VDC - 24VDC - 110VAC - 220VAC				
Power	Red: 1.5W, Green-Yellow-Blue-White : 0.9W				
Signal Type	Continuous (S) Flashing (F)				
Lens Material	PC				
Housing Material	ABS				
Buzzer Tone Type	Intermittent				
Buzzer Output dB	92dB				
Protection	IP65				
Weight Approx (kg)	0,15	0,21	0,27	0,33	0,40
Dimensions (mm)	52x75x190	52x75x255	52x75x320	52x75x385	52x75x450
Mounting	Base mount with M5 bolts				
Connection	Unterminated cable				

Ø70



Model	WL-T7-..1	WL-T7-..2	WL-T7-..3	WL-T7-..4	WL-T7-..5
Voltage	12VDC - 24VDC - 110VAC - 220VAC				
Power	Red: 2W, Green: 1.3W, Yellow: 0.8W, Blue: 1.4W, White: 1.3W				
Signal Type	Multi (Continuous/Flashing) - 4 modes optional (Continuous/Flashing/Rotating/Strobe)				
Lens Material	PC				
Housing Material	ABS				
Buzzer Tone Type	Continuous or Flashing				
Buzzer Output dB	92dB standard - 110dB optional				
Protection	IP65				
Weight Approx (kg)	0,22	0.3	0.38	0.46	0.54
Dimensions (mm)	68x75x154	68x75x219	68x75x284	68x75x349	68x75x414
Connection	Unterminated cable				

Warning Lamps

- Available as modular level, which allows customization in field
- Each light module can be configured individually to continuous or flashing operation mode
- Shock and heat resistant polycarbonate lenses



Model	WL-B-QH	WL-B-BH	WL-MB-QH	WL-MB-BH/ MB-BH-1	WL-MB-BH-2	WL-MB-BH-3
Voltage	12VDC - 24VDC - 110VAC - 220VAC					
Power	-		Red - Yellow: 3W, Green, Blue, White: 2.2W			
Luminous Source	-		LED			
Signal Type	-		Multi (for each level)			
Colors	-		Red, Green, Yellow, Blue, White			
Lens Material	-		PC			
Housing Material	ABS					
Buzzer Tone Type	7 Melodies					
Buzzer Output dB	92dB standard - 110dB optional					
Protection	IP65					
Weight Approx (kg)	0,08	0,13	0,14	0,22	0,29	0,37
Dimensions (mm)	66x76x69	66x76x160	68x76x125	68x76x220	68x76x284	68x76x340
Connection	Unterminated cable					

Warning Lamps

It is designed to add value to your machine. Recreate your tower lights.

Aesthetic, Powerful, Modular, Functional

Variations

5 colors + RGB
1~5 level, one color in each level

Strong Structure

Suitable for heavy conditions
Polycarbonate Lens

Functional

Continuous and flashing operation adjustable for each level.

Audible

With a sound level of 92 dB
Continuous or Intermittent
Adjustable Buzzer

Detachable Lens

Build your own tower lights
with Modular Lenses

Lens

WL-PM5-LK
WL-PM5-LY
WL-PM5-LS
WL-PM5-LM
WL-PM5-LB

Body


WL-PM5-GR-24
WL-PM5B-GR-24
WL-PM5-GR-22
WL-PM5B-GR-22

Mounting

Adjustable, 90° angle,
Upright and Wall
mounting options

Mounting Type

XPM5-ADP

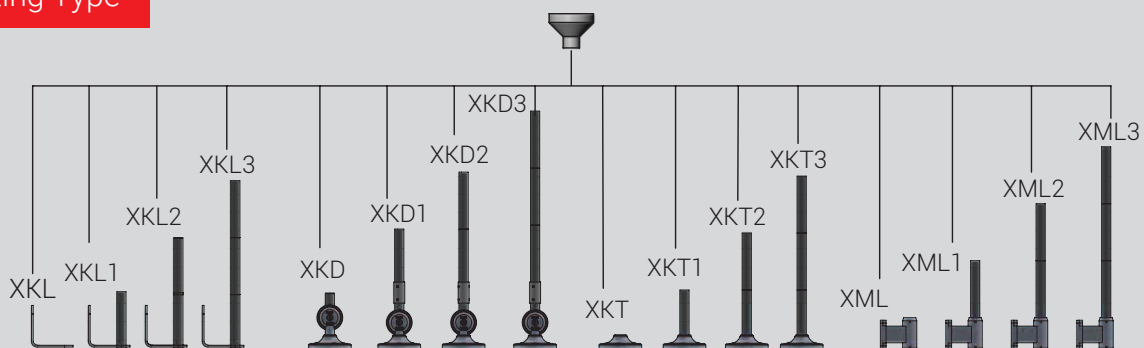

ENCLOSURE COOLING SYSTEMS



Enclosure Cooling

Enclosure Cooling XX-CS.050



Floor Standing Side Cover Assembly
Digital Thermostat Control
Inox, Easy Maintenance - With Openable
Cover, A Class Equipment

XX-CS.050

Technical Information

Case Option	RAL 7035
Cooling Capacity	450 W
Rated Voltage/Frekans	220-230V/50-60Hz
Starting Current (A)	4,2 A
Operating Current (A)	2,2 A
Fuse (A)	6A
Max Pressure	26 bar
Size : Height/Width/Depth	550x300x230 mm
P Size: Height/Width/Depth	600x350x265 mm
Net Weight	23 Kg
Gross Weight	25 Kg
Evaporatör Fan Air Volume	325m ³ /h
Kondanser Air Volume	465m ³ /h
Power Consumption	260 W
Refrigerant	R134a
Operational range	(+20 °C / +55 °C)
Protection System	IP 54
Mounting Method	Steep-Wall
Thermostat setting	30 °C
Cop Heating Efficiency Coefficient	1,73

Enclosure Cooling XX-CS.100



Floor Standing Side Cover Assembly
Digital Thermostat Control
Inox, Easy Maintenance - With Openable
Cover, A Class Equipment

XX-CS.100

Technical Information

Case Option	RAL 7035
Cooling Capacity	1080 W
Rated Voltage/Frekans	198-252V/50-60Hz
Starting Current (A)	12,2 A
Operating Current (A)	4,1 A
Fuse (A)	16A
Max Pressure	26 bar
Size : Height/Width/Depth	900x400x220 mm
P Size: Height/Width/Depth	945x455x265 mm
Net Weight	35,4 Kg
Gross Weight	37 Kg
Evaporatör Fan Air Volume	540m ³ /h
Kondanser Air Volume	945m ³ /h
Power Consumption	690 W
Refrigerant	R134a
Operational range	(+20 °C / +55 °C)
Protection System	IP 54
Mounting Method	Steep-Wall
Thermostat setting	30 °C
Cop Heating Efficiency Coefficient	1,73

Enclosure Cooling XX-CS.200



Floor Standing Side Cover Assembly
Digital Thermostat Control
Inox Easy Maintenance - With Openable
Cover, A Class Equipment

XX-CS.200

Technical Information

Case Option	RAL 7035
Cooling Capacity	1930 W
Rated Voltage/Frekans	187-254V/50-60Hz
Starting Current (A)	12,8 A
Operating Current (A)	4,6 A
Fuse (A)	16A
Max Pressure	26 bar
Size : Height/Width/Depth	1000x400x250 mm
P Size: Height/Width/Depth	1050x455x280 mm
Net Weight	46 Kg
Gross Weight	48 Kg
Evaporatör Fan Air Volume	945m3 /h
Kondanser Air Volume	945m3 /h
Power Consumption	980 W
Refrigerant	R134a
Operational range	(+20 °C / +55 °C)
Protection System	IP 54
Mounting Method	Steep-Wall
Thermostat setting	30 °C
Cop Heating Efficiency Coefficient	1,97

Enclosure Cooling XX-CS.300



Floor Standing Side Cover Assembly
Digital Thermostat Control
Inox, Easy Maintenance - With Openable
Cover, A Class Equipment

XX-CS.300

Technical Information

Case Option	RAL 7035
Cooling Capacity	2960 W
Rated Voltage/Frekans	187-254V/50-60Hz
Starting Current (A)	19,8 A
Operating Current (A)	7,2 A
Fuse (A)	25A
Max Pressure	26 bar
Size : Height/Width/Depth	1000x400x250 mm
P Size: Height/Width/Depth	1050x455x280 mm
Net Weight	52 Kg
Gross Weight	54,5 Kg
Evaporatör Fan Air Volume	945m3 /h
Kondanser Air Volume	1220m3 /h
Power Consumption	690 W
Refrigerant	R134a
Operational range	(+20 °C / +55 °C)
Protection System	IP 54
Mounting Method	Steep-Wall
Thermostat setting	30 °C
Cop Heating Efficiency Coefficient	2,24

Enclosure Cooling

Air/Air Heat Exchangers XX-HE.100



100 watt
Color RAL 7035
Power 220 V 50/60 Hz 0,4 A


Air/Air Heat Exchangers XX-HE.200



200 watt
Color RAL 7035
Power 220 V 50/60 Hz 0,4 A


XX-HE.100

Technical Information

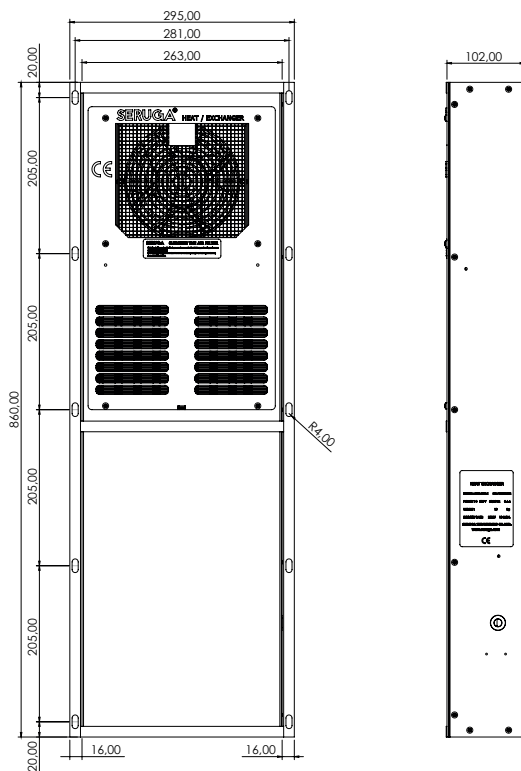

XX-HE.200


Technical Information

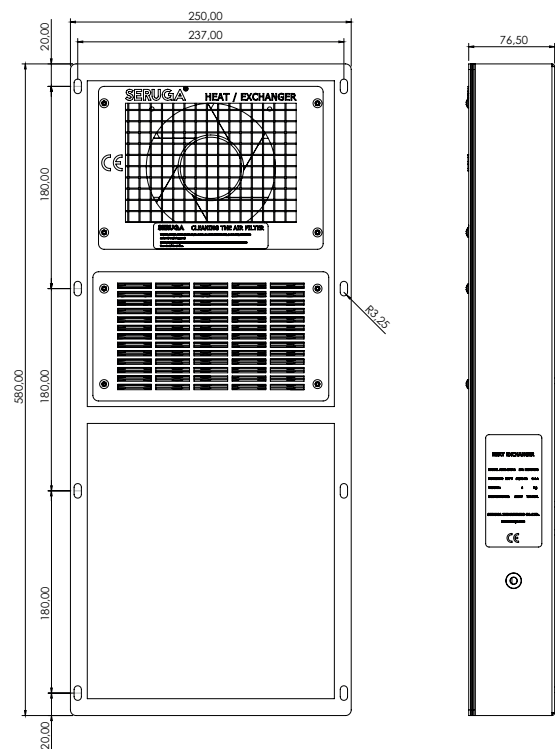






SUPERSPORT AR SYSTEMS

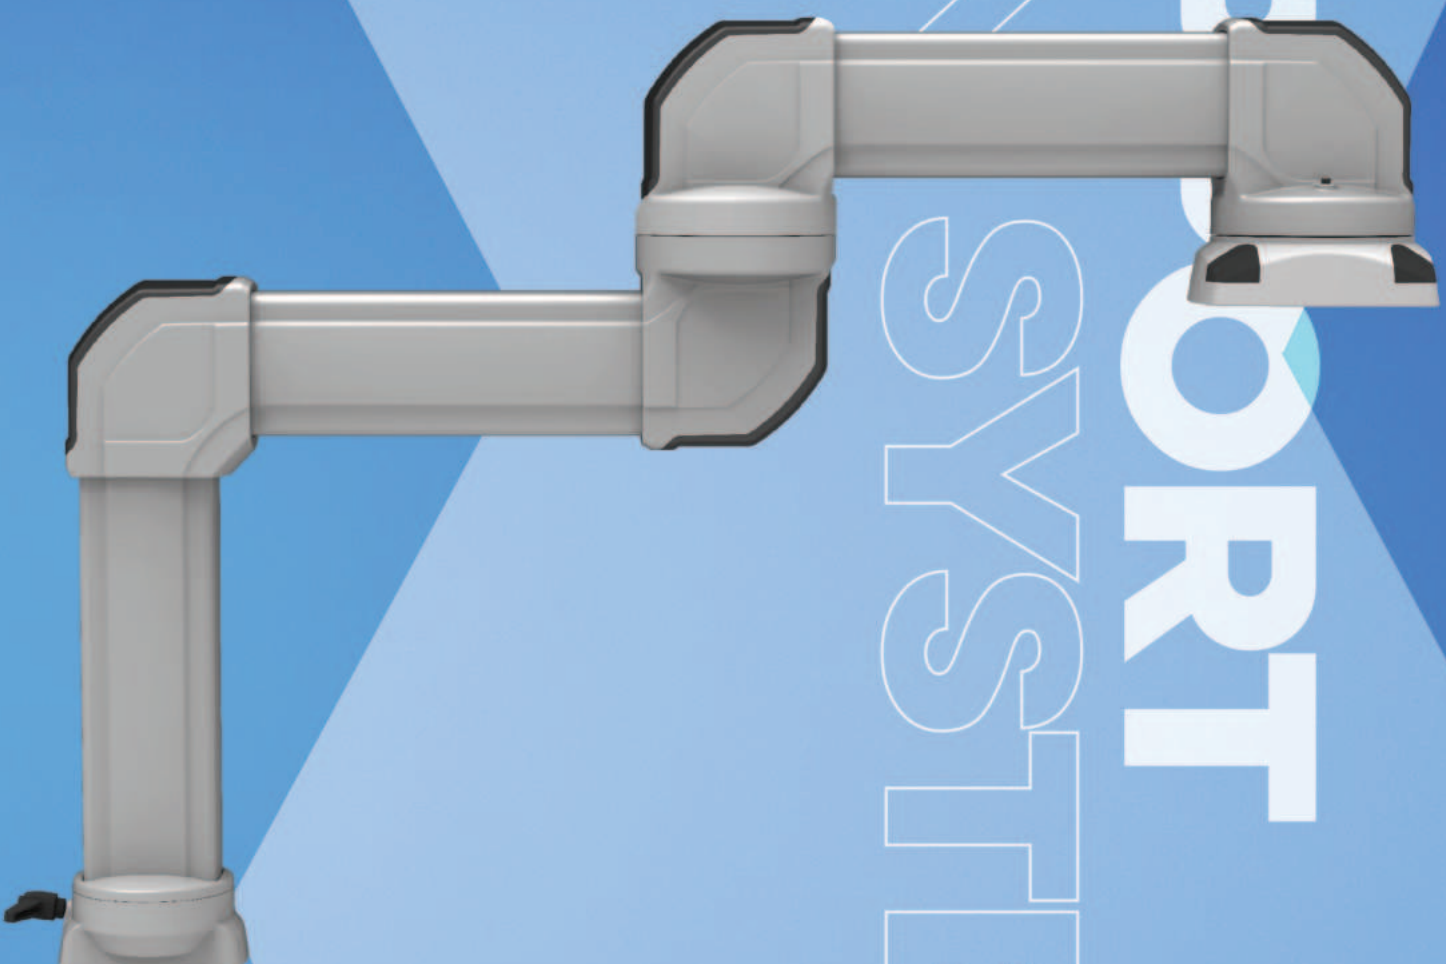


REFERENCES



SPECIAL BRANDS CHOOSING US

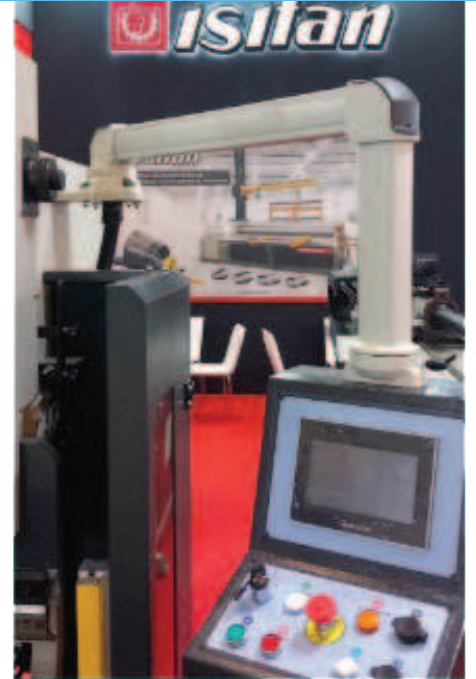



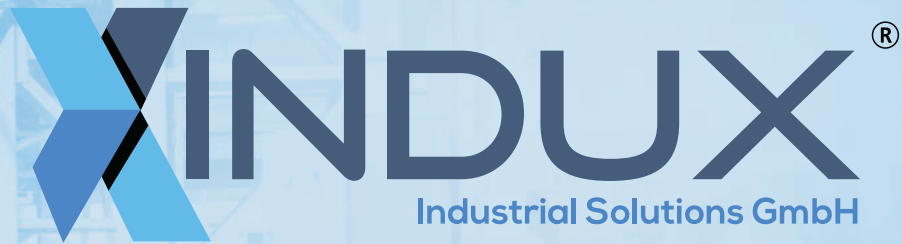

XINDUX Industrial Solutions GmbH

Moltkestraße 55-57, 32257 Bünde

Phone: +49 (0) 5223/81960-55

Fax: +49 (0) 5223/81960-56

www.xindux.com
sales@xindux.com

The background of the image is a photograph of a large industrial facility, likely a factory or warehouse, with a high ceiling and complex structural elements. The image is overlaid with a semi-transparent blue filter and large, dark blue geometric shapes, specifically triangles, that point towards the center. In the center of the image, the company name 'XINDUX' is written in a large, white, sans-serif font. To the right of the 'X' is a registered trademark symbol (®). Below the main name, the text 'Industrial Solutions GmbH' is written in a smaller, white, sans-serif font.

XINDUX®
Industrial Solutions GmbH