




LID

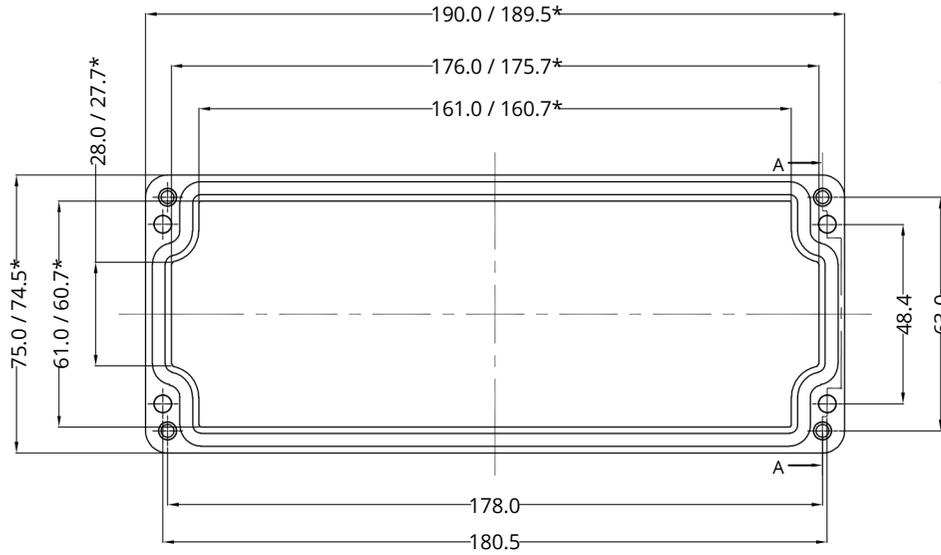

Cylinder Screw  
M4 x 24/7 similar to DIN 84


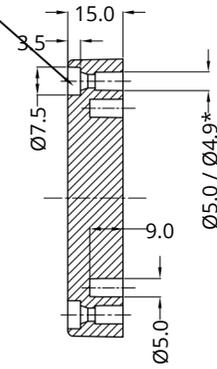


SECTION A-A

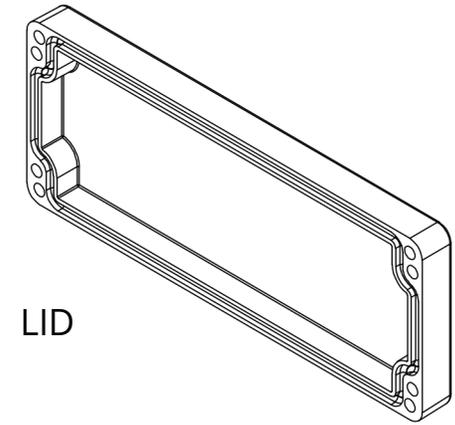


LID

BASE

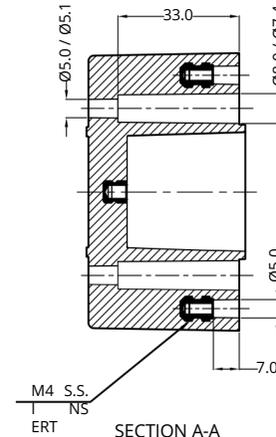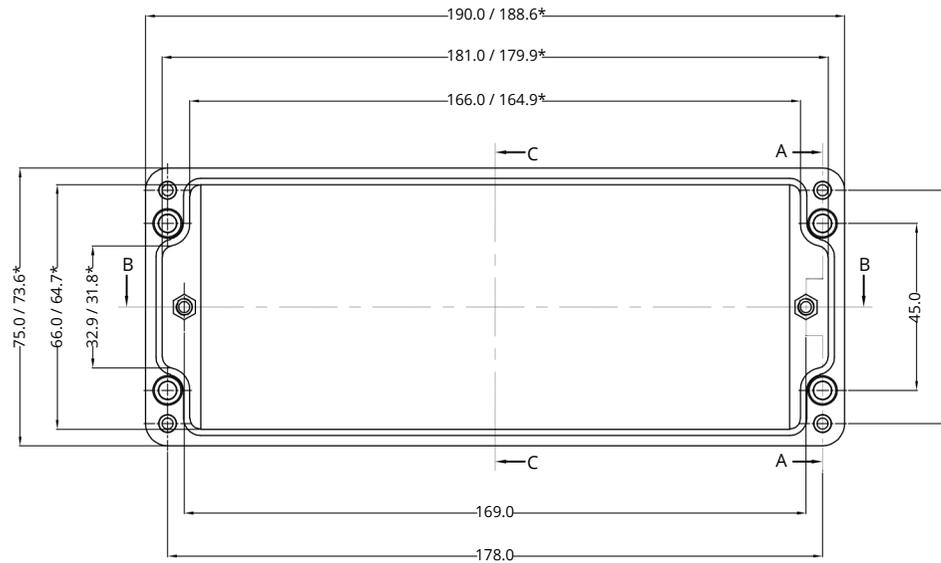


SECTION A-A

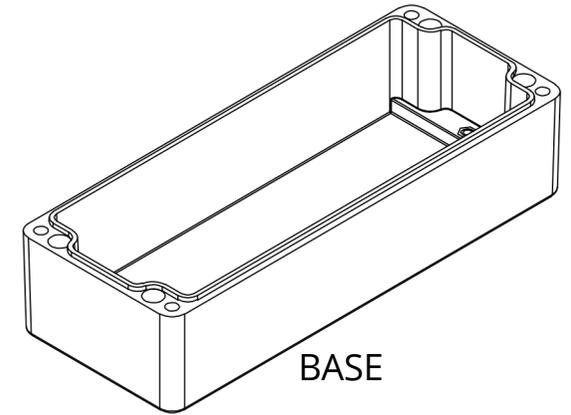

BASE

\*=Conical form tapering downwards  
Free dimensions-tolerance to DIN 16901-140

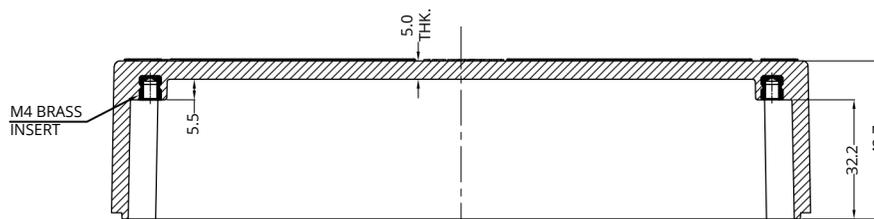

SECTION B-B

M4 BRASS  
INSERT

Material:- Glass fiber Reinforced Polyester (GRP)

Finish:- RAL9011 (black)

General Tolerances  
DIN ISO -  
Linear Tol.: , Angular Tol.:  
Surface Finish:  
All Dimensions: mm



DO NOT SCALE

TITLE :-

GBPEX Polyestergehäuse  
ATEX GRP ENCLOSURE  
190 X 75 X 55



Moltkestraße 55-57  
32257 Bunde  
Tel: +49 (0) 5223 / 819 60 -55  
Fax: +49 (0) 5223 / 819 60 -56

This drawing and any information or descriptive material set out on it are the confidential property of Company Name and MUST NOT BE DISCLOSED, COPIED in whole or part or used for any purpose without the written permission of Company Name.

DRAWN BY:	DATE
HK	2 2/ 4/ 22
CHECKED BY:	DATE
DN	2 2/ 4/ 22

CODE:	REV
DRG. NO. GBPEX001907555	00

SHEET 1 OF 1