
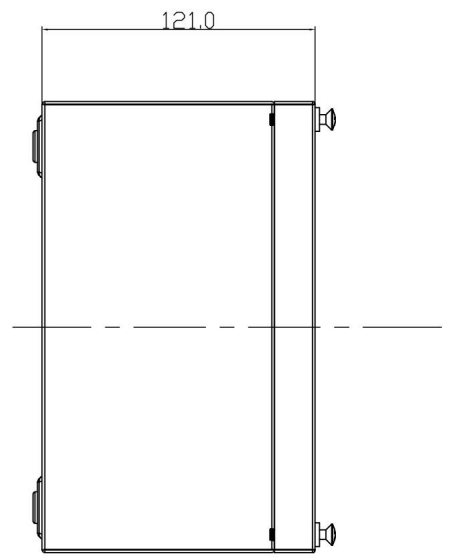
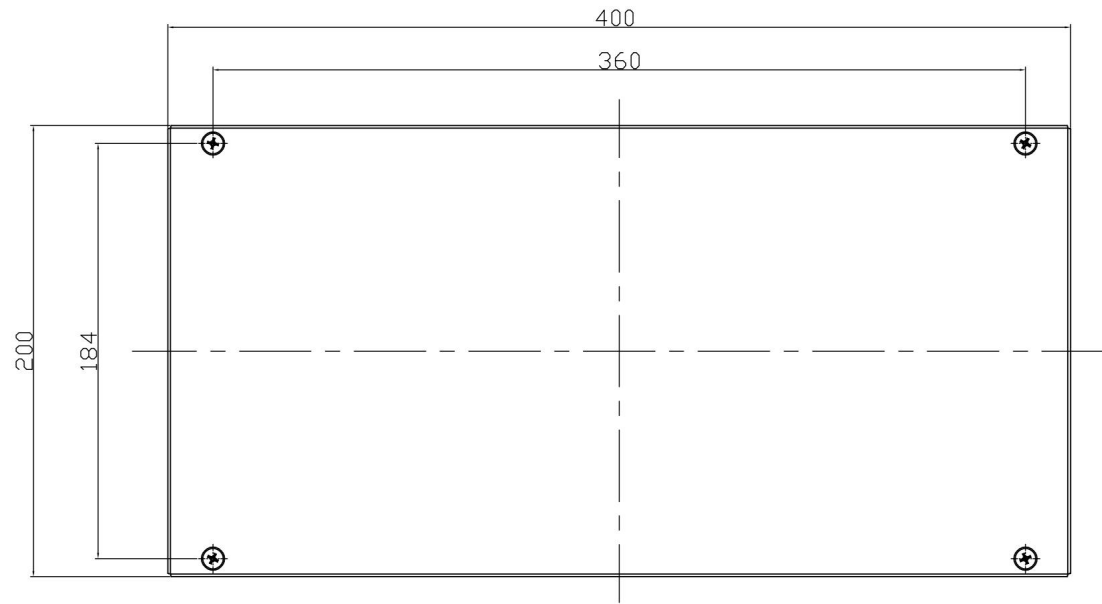
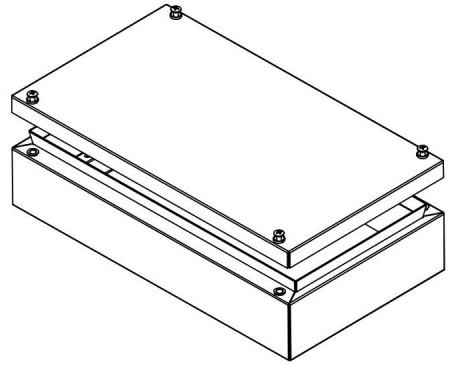


SECTION A-A

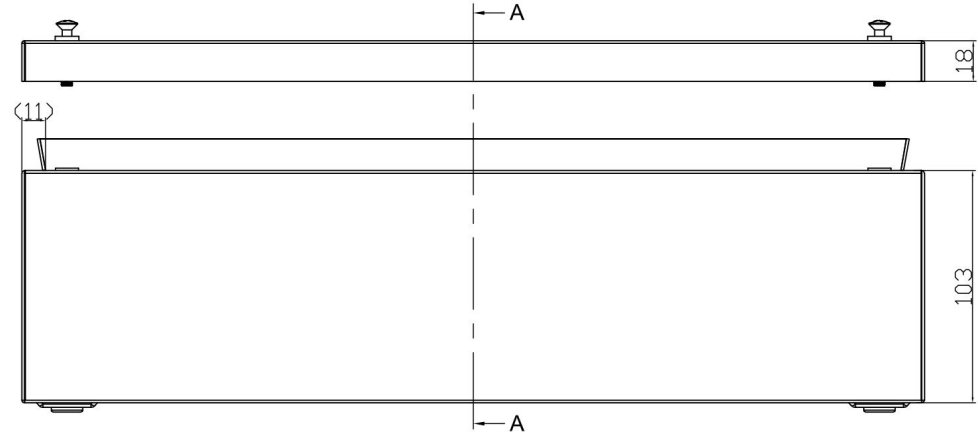

Sr.	Material	Qty.
1	Base (Assembly)	1
1.1	Base	1
1.2	Din Rail Mounting Channel	2
1.3	Blind NutSert M5 - SS A2	4
1.4	Bottom Sealing Cap	4
2	Lid (Assembly)	1
2.1	Lid	1
2.2	Gasket	1
2.3	Plastic captive Screw insert	4
2.4	Stud M6x12 A2	1
2.5	Lid Screw M5 A2 DIN 966	4

**Material:-**  
SS304 / SS316L / STEEL

**Finish:-** SS - Grinded 240 grains  
(For Steel Powder coated)

General Tolerances  
DIN ISO 2768c  
Linear Tol. ±1, Angular Tol. :-  
Surface Finish:

All Dimensions: mm

**TITLE :-**  
SS/Steel gehäuse  
Enclosure  
400 X 200 X 121


This drawing and any information or descriptive material set out on it are the confidential property of Company Name and MUST NOT BE DISCLOSED, COPIED in whole or part or used for any purpose without the written permission of Company Name.

DRAWN BY:		DATE
HK		22/4/22
CHECKED BY:		DATE
DN		22/4/22



CODE:	DRG. NO.	REV
	GBS400200121	00

Description	Rev.	Date



Molkestraße 55-57  
32257 Bünde  
Tel: +49 (0) 5223 / 819 60 -55  
Fax: +49 (0) 5223 / 819 60 -56