
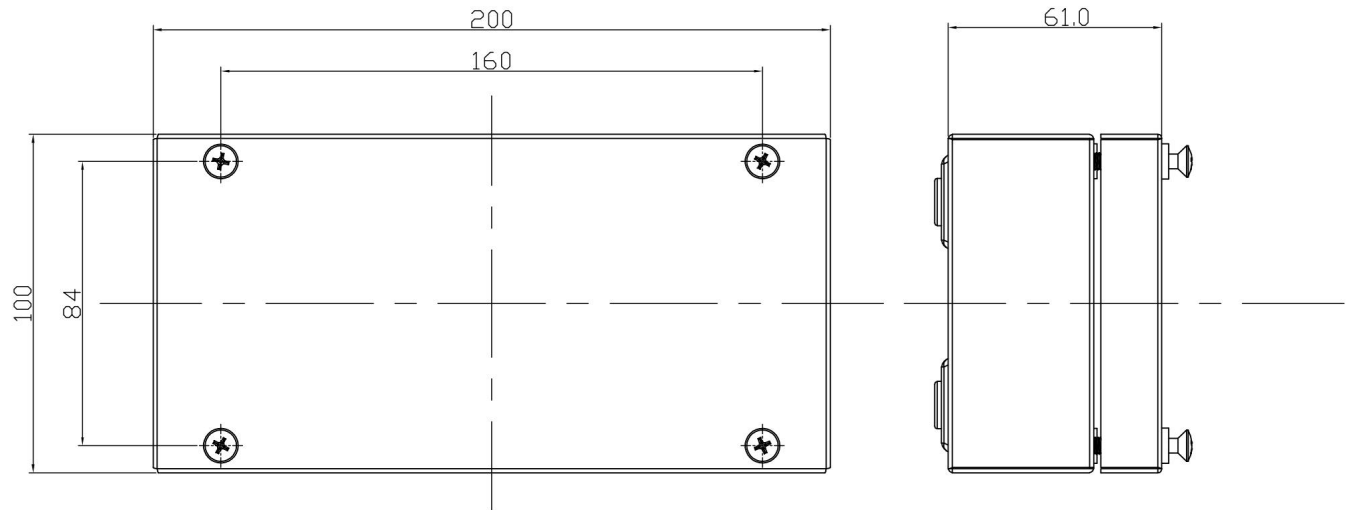
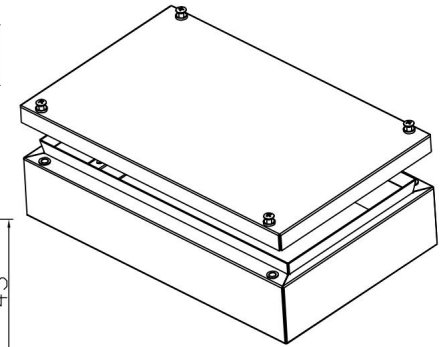


SECTION A-A

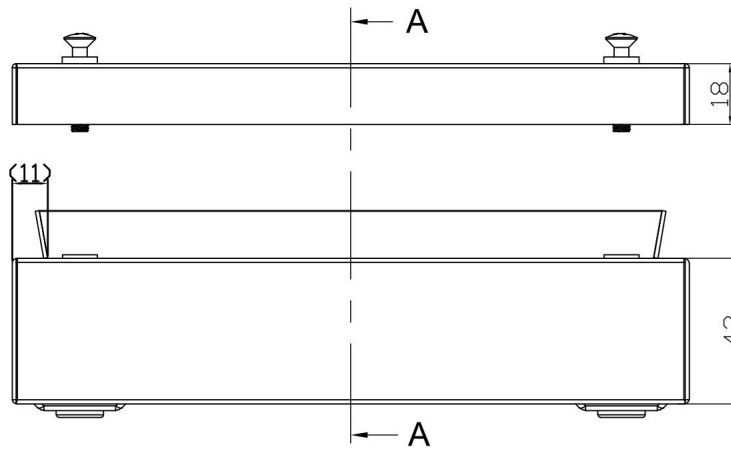

Sr.	Material	Qty.
1	Base (Assembly)	1
1.1	Base	1
1.2	Din Rail Mounting Channel	2
1.3	Blind NutSert M5 - SS A2	4
1.4	Bottom Sealing Cap	4
2	Lid (Assembly)	1
2.1	Lid	1
2.2	Gasket	1
2.3	Plastic captive Screw insert	4
2.4	Stud M6x12 A2	1
2.5	Lid Screw M5 A2 DIN 966	4

Material:-
SS304 / SS316L / STEEL
Finish:-SS - Grinded 240 grains
(For Steel Powder coated)
General Tolerances
DIN ISO 2768c
Linear Tol. ±1. , Angular Tol. :-
Surface Finish:
All Dimensions: mm

TITLE :-

SS/Steel gehäuse
Enclosure
200 X 100 X 61


This drawing and any information or descriptive material set out on it are the confidential property of Company Name and MUST NOT BE DISCLOSED, COPIED in whole or part or used for any purpose without the written permission of Company Name.

DRAWN BY:	DATE
HK	22/4/22
CHECKED BY:	DATE
DN	22/4/22



CODE:	REV
DRG. NO. GBS020010061	00
SHEET 1 OF 1	

Description	Rev.	Date



Moltkestraße 55-57
32257 Bünde
Tel: +49 (0) 5223 / 819 60 -55
Fax: +49 (0) 5223 / 819 60 -96