Local catalogue draft · Preview only. Product data and documents are not released. Open catalogue review

Draft without a blocking review case

This view is not engineering approval. Open and withheld information remains unresolved.

▶ 4 open or withheld review cases



Product view 1 / 1

ADAPTORS / JOINT PARTS

Warning Lamp Cover (M18)

Article number
X-M-SLA02

REQUEST A QUOTE

The signal light cover adds a mounting point for a light with a M18 connection to the X-M support-arm system. Fitted in the corner module area, it provides the mechanical transition to the signal light. The connection is designed for the specified thread. The cover allows a light with this connection to be incorporated into the support-arm assembly; the light's electrical configuration must be considered separately.

Weight
130 g

Material
Aluminum

Colour
RAL 7016

Package Dimensions
145 × 50 × 70 mm

HS Code
7606.99.90.19

Warranty
5 years

Technical data

Specifications for planning, selection and use at a glance.

Material & finish

Material Composition	Aluminum
Colour	RAL 7016
RAL colours	RAL 7016

Application & function

Operating Weight	130 g
Primary Use Case	Machine Building / Automation / HMI operator stations
Operating Temperature	–40°C to +70°C
Protection Rating	–IP65 (DIN EN 60529)
Rated Voltage	Mechanical (not subject to electrical certification)
Movement	Fixed

Safety & compliance

Earthing	Yes, integrated solution
RoHS Compliance	RoHS EU Directive 2011/65/EU
REACH Compliance	REACH Regulation 1907/2006/EC
Certification	IEC 60529; (EG) No. 765/2008; (EU) 2023/956

Further information

Movement type	fest
Connection thread	M18×1.5

Ordering & delivery information

Package dimensions

145 × 50 × 70 mm

Pack quantity

1

HS Code

7606.99.90.19

Warranty

5 years

Version & enquiry

Use the item number and version to prepare your enquiry.

SKU ↑	WEIGHT (G) ↑↓	Choose a version
SKU: X-M-SLA02	130	Select


Assembly instructions

▶ About these instructions

Assembly sequence prepared from the exact XINDUX article data sheet. Tightening torques not specified in the source document are deliberately not added.

▼ Preparation & tools

Supplied and installation parts



Required tools

Allen key suitable for the fasteners

Torque wrench for the final engineering check



1. Install the warning lamp

Remove the yellow tape and insert the gasket with the adhesive surface facing inward. The warning light connection is M18 × 1.5 as standard; Different connection sizes are possible on request.


- M18 × 1,5



2. Fit the cover

Position the covers and secure them with the screws shown.

- M4 × 8

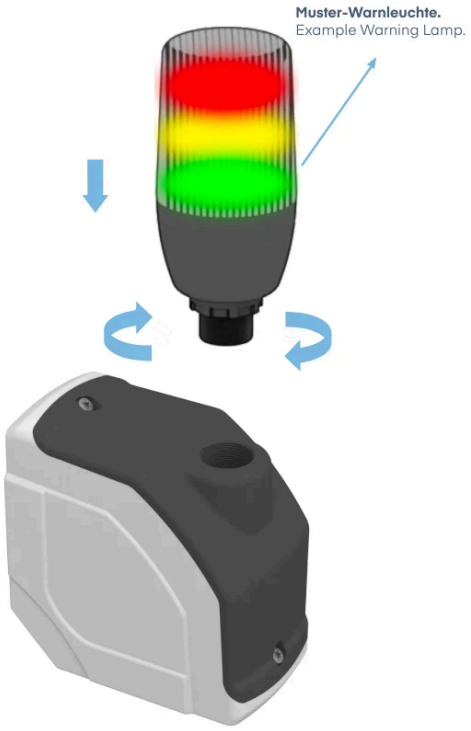

3. Install the warning lamp

Install the warning light by screwing it clockwise into the cover.



Beispiel-Modul.
Sample Module.

4. Inspect the assembly

Check whether the assembly is as shown in the figure.