Local catalogue draft · Preview only. Product data and documents are not released. Open catalogue review

Draft with publication block

This view is not engineering approval. Open and withheld information remains unresolved.

▶ 9 open or withheld review cases



Product view 1 / 1

PANEL COUPLING

Ø134 mm 10° Panel Adaptor

Article number
X-M-PA03

REQUEST A QUOTE

The Ø134 mm panel adapter provides a fixed 10° connection between the connection module and operator enclosure in the X-M support-arm system. It bridges the connection dimensions while setting the inclination at the enclosure connection. The angle is defined by the adapter's design and is not adjusted through a joint. The attachment points provided are used to mount the adapter on the operator enclosure.

Weight
380 g

Material
Aluminum

Colour
RAL 7035

Package Dimensions
135 × 45 × 130 mm

HS Code
7606.99.90.19

Warranty
5 years

Technical data

Specifications for planning, selection and use at a glance.

Material & finish

Material Composition	Aluminum
Colour	RAL 7035
RAL colours	RAL 7035

Application & function

Operating Weight	380 g
Primary Use Case	Machine Building / Automation / HMI operator stations
Operating Temperature	–40°C to +70°C
Protection Rating	–IP65 (DIN EN 60529)
Rated Voltage	Mechanical (not subject to electrical certification)
Movement	Fixed

Safety & compliance

Earthing	Yes, integrated solution
RoHS Compliance	RoHS EU Directive 2011/65/EU
REACH Compliance	REACH Regulation 1907/2006/EC
Certification	IEC 60529; (EG) No. 765/2008; (EU) 2023/956

Further information

Diameter	134 mm
Movement type	fest
Angle	10°

Ordering & delivery information

Package dimensions

135 × 45 × 130 mm

Pack quantity

1

HS Code

7606.99.90.19

Warranty

5 years

Version & enquiry

Use the item number and version to prepare your enquiry.

SKU ↑	WEIGHT (G) ↑↓	Choose a version
SKU: X-M-PA03	380	Select


Assembly instructions

▶ About these instructions

Assembly sequence prepared from the exact XINDUX article data sheet. Tightening torques not specified in the source document are deliberately not added.

▼ Preparation & tools


Supplied and installation parts



Required tools

Allen key suitable for the fasteners

Torque wrench for the final engineering check

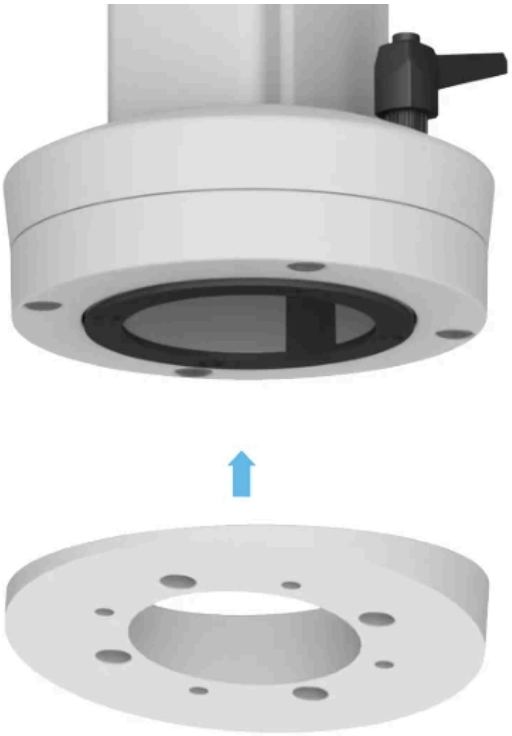


1. Prepare the components

Combine the modules step by step as shown in the figure. X-M-PKD01 X-M-PKD02 X-L-PKD01 X-L-PWK01



2. Prepare the components


Insert the adapter into the coupling as shown in the illustration on the left.

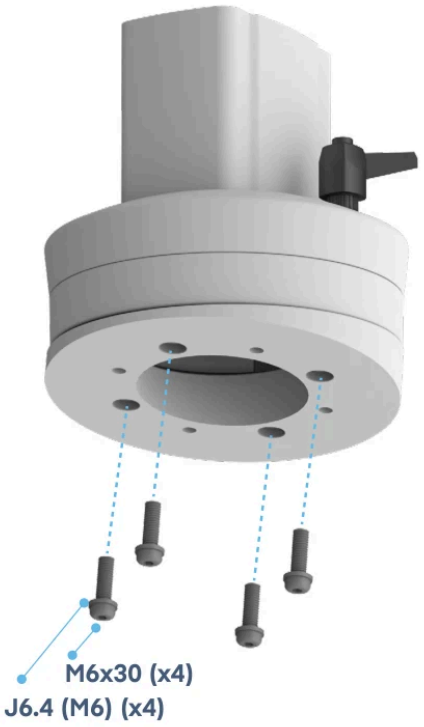

3. Fasten the connection


Tighten the connecting bolts.

- M6 × 30
- J6.4
- M6

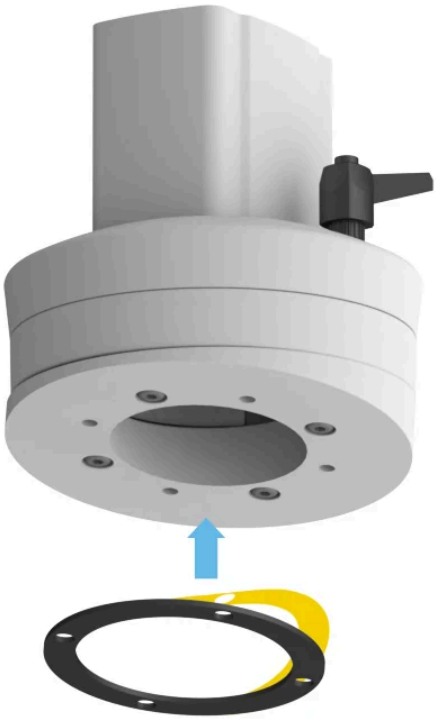

4. Insert the gasket


Remove the yellow tape. Insert the gasket so that the adhesive surface faces inward.

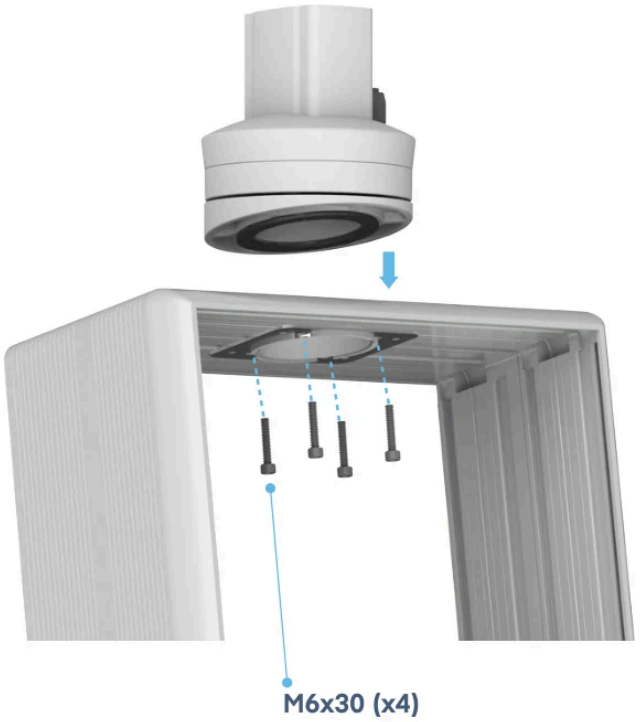

5. Fasten the module to the panel

Place the module on the panel.

- M6 × 30

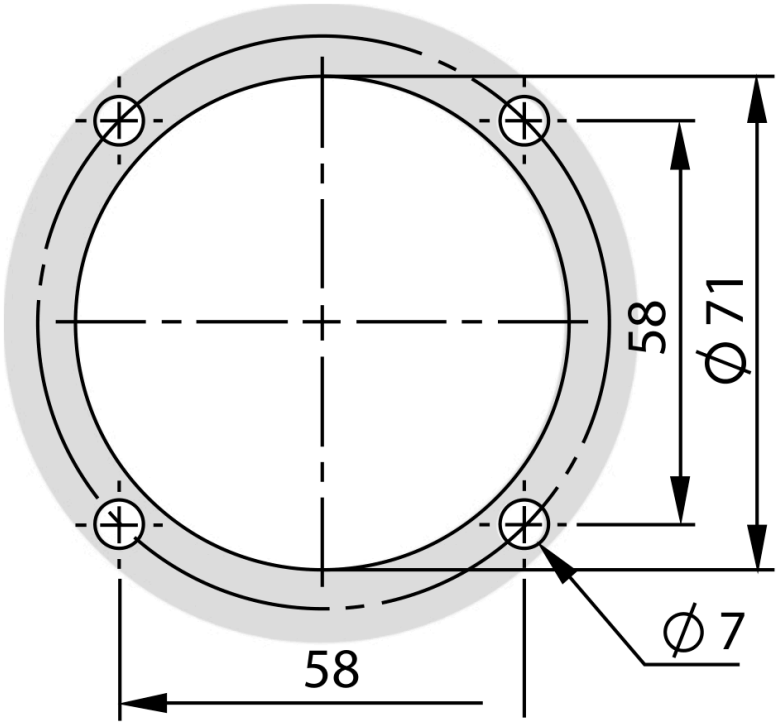

6. Prepare the mounting holes

If required, prepare the mounting holes according to the dimensioned drawing. All dimensions are given in millimetres.