


XINDUX XX-TA080.xxx Support Arm Profile - Technical Datasheet

Technischer Querschnitt / Technical Cross Section, Profilgrößen / Profile Sizes, Lasten / Loads.

Technischer Querschnitt / Technical Cross Section	Merkmal / Feature	Wert / Value
	Aussenmass / Outer Dimension	85.00 x 58.00 mm
	Innenmass / Inner Dimension	78.50 x 52.00 mm
	Bohrbild 1 / Hole Pattern 1	68.50 x 37.00 mm
	Bohrbild 2 / Hole Pattern 2	46.50 x 37.00 mm
	Lochbild / Hole Pattern	Ø5.40 mm x8
	Bohrungen / Holes	8
	Winkeleinstellung / Angle Adjustment	Ja / Yes
	Material / Material	Aluminium 6060
	HS Code	7606.99.90.19

Profilgrößen / Profile Sizes (Katalog / Catalogue)				
XINDUX Code	Laenge / Length (mm)	Gewicht / Weight (g)	RAL	Paketmass / Package (mm)
XX-TA080.025	250	1000	7035	55 x 90 x 260
XX-TA080.050	500	2000	7035	55 x 90 x 510
XX-TA080.075	750	3000	7035	55 x 90 x 760
XX-TA080.100	1000	4000	7035	55 x 90 x 1010
XX-TA080.125	1250	5000	7035	55 x 90 x 1260
XX-TA080.150	1500	6000	7035	55 x 90 x 1510
XX-TA080.175	1750	7000	7035	55 x 90 x 1760
XX-TA080.200	2000	8000	7035	55 x 90 x 2010

Lastdiagramm / Load Diagram

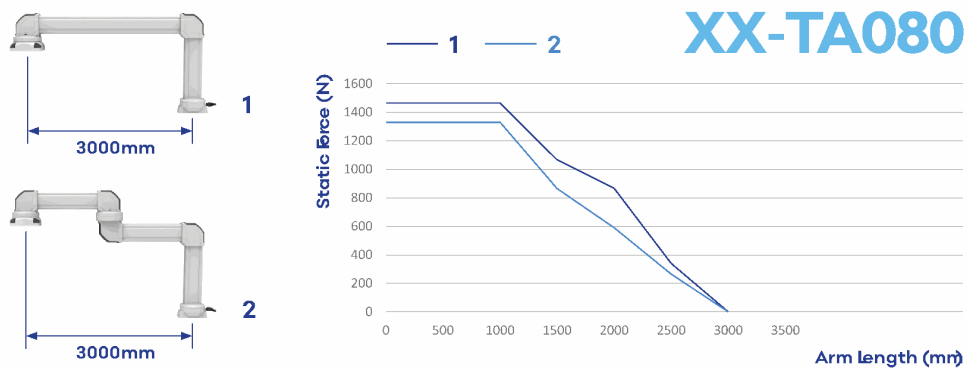

Statische Kraft in N / Static force in N, aus Katalogdiagramm abgeleitet / derived from catalogue diagram.

Kurve / Curve	Punkt 1 / Point 1	Punkt 2 / Point 2	Punkt 3 / Point 3
Kurve 1 (ca.)	1000 mm / 1460 N	2000 mm / 860 N	3000 mm / 0 N
Kurve 2 (ca.)	1000 mm / 1320 N	2000 mm / 600 N	3000 mm / 0 N

Katalog 2024 / Catalogue 2024: Lastdiagramm S.9 / Load Diagram p.9, Profiltabelle S.30 / Profile Table p.30